



Manuals.plus /

› **HOLDLAMP** /

› HOLDLAMP ZQ02356US Mini Moving Head DJ Light Instruction Manual

HOLDLAMP ZQ02356US

HOLDLAMP ZQ02356US Mini Moving Head DJ Light

Instruction Manual

INTRODUCTION

The HOLDLAMP ZQ02356US Mini Moving Head DJ Light is a versatile stage lighting fixture designed for dynamic lighting effects. It features 7 x 50W RGBW LEDs, offering both beam and wash capabilities with 4-in-1 color mixing. This manual provides essential information for the safe and effective setup, operation, and maintenance of your device.

WHAT'S IN THE BOX

Upon unpacking, please ensure all items listed below are present and in good condition:

- 1X moving head dj lights
- 1X Power Cord
- 1X Hook Accessory
- 1X User Manual



The image displays the HOLDLAMP ZQ02356US Mini Moving Head DJ Light along with its accessories: a power cord, a hook accessory, and the user manual.

SETUP INSTRUCTIONS

Follow these steps to set up your moving head light:

1. **Unpacking:** Carefully remove the light fixture and all accessories from the packaging.
2. **Placement:** Position the light on a stable, flat surface or securely mount it using the provided hook accessory. Ensure adequate ventilation around the unit.
3. **Power Connection:** Connect the power cord to the 'POWER IN' port on the rear of the fixture and then to a suitable power outlet (AC100-240V, 50/60Hz).
4. **DMX Connection (Optional):** For DMX control, connect a 3-pin DMX cable from your DMX controller to the 'DMX IN' port. If linking multiple units, connect from 'DMX OUT' of the first unit to 'DMX IN' of the next.
5. **Initial Power-On:** Flip the ON/OFF switch to power on the device. The LCD display will illuminate.



The rear panel of the light fixture, detailing the DMX input/output, power input/output, fuse, and power switch for connections.

Setup Demonstration Video

Your browser does not support the video tag.

This video demonstrates the unpacking and connection of the 7X50W Moving Head Lights, including power and DMX cables, and the bow mount installation.

OPERATING MODES

The HOLDLAMP ZQ02356US offers multiple control modes to suit various applications:

- **Automatic Mode:** The light runs through pre-programmed sequences without external input.
- **Voice Control Mode (Sound Activated):** The light reacts to ambient sound or music, synchronizing effects with the beat.
- **DMX Mode:** Provides precise control over all functions using a DMX512 controller, allowing for customized light shows.
- **Master-Slave Mode:** Multiple units can be linked, with one acting as the master to control the others, ensuring synchronized effects.



The control panel of the light, illustrating the available operating modes: DMX, Sound Control, Master-slave, and Self-propelled (Automatic).

Operating Mode Demonstration Video

Your browser does not support the video tag.


This video demonstrates how to set the DJXFLI 90W RGBW Moving Head Light to Auto Mode, Sound Mode, and Master/Slave Mode using the control panel, and how to select DMX channels.

KEY FEATURES

- **Powerful Light Source & Rich Colors:** Equipped with 7 x 50W RGBW LEDs (350W rated power), offering a light angle of 4.5°-45° for high brightness and pure color.
- **Multiple Effects:** Features dyeing, beam, vortex, kaleidoscope, electronic linear focus, and single point control for diverse stage effects.
- **Constant Current Motherboard Technology:** Ensures stable and efficient operation, improving reliability and light continuity.
- **Efficient Heat Dissipation:** Constructed with flame-retardant and high-temperature resistant plastic material, enhancing product safety and longevity.
- **Dynamic Movement:** Offers 540° pan (X-axis) and 255° tilt (Y-axis) movement for broad coverage.



The HOLDLAMP ZQ02356US Mini Moving Head DJ Light, highlighting its 350W power and capabilities including Beam, RGBW, Wash, and DMX control.

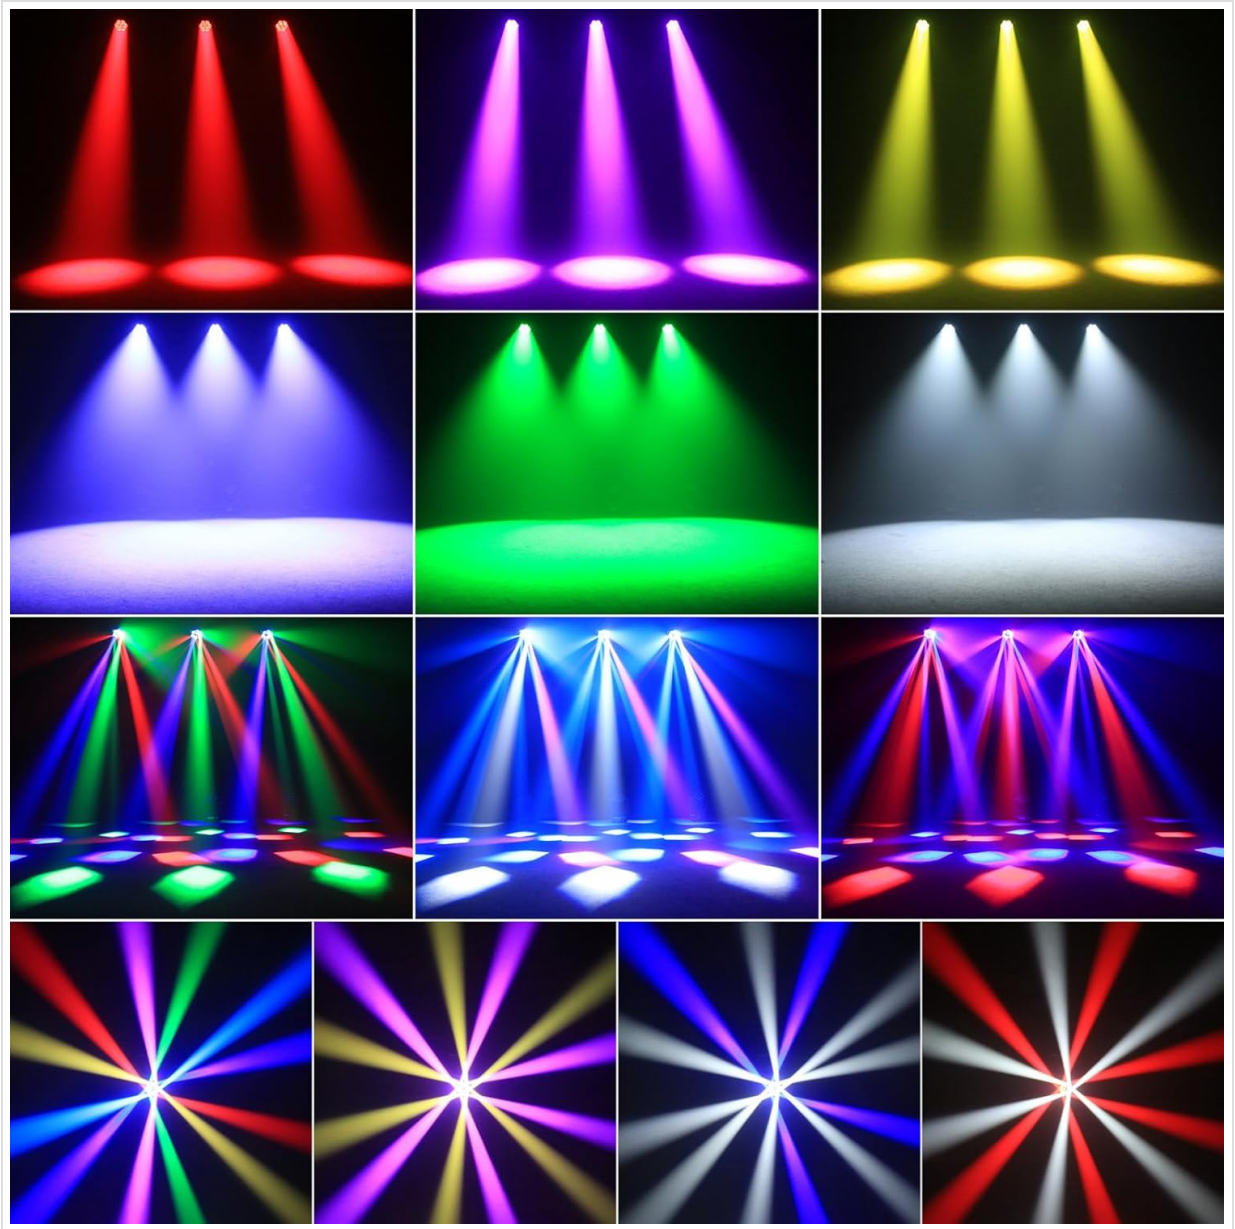

A collage of various color and beam effects produced by the light, showcasing its versatility.



Optical Lens

Make the lighting wider and
emit more beautiful



Cooling Fan

Make the temperature of the LED
stage lights within a safe range



Rotary Arm

Fixed lens rotation to maintain
lens stability



Detailed views of the optical lens for wider lighting, the cooling fan for temperature regulation, and the rotary arm for lens stability.



An illustration showing the dimensions of the light and its pan (540° X-axis) and tilt (255° Y-axis) movement capabilities.

Effect Demonstration Video

Your browser does not support the video tag.

This video showcases the various lighting effects of the Moving Head Light LED 19x15W RGBW, including pan, tilt, zoom, color mixing, strobe, and kaleidoscope effects.

Your browser does not support the video tag.

This video demonstrates the zoom and RGB halo ring effects of the Moving Head Light, showcasing its dynamic lighting capabilities.

SPECIFICATIONS

Model Number	ZQ02356US
Color	2356-1 Pack
Shape	Rectangular
Material	Acrylonitrile Butadiene Styrene (ABS)
Finish Type	Painted
Light Source Type	LED
Power Source	Corded Electric
Voltage	120 Volts (AC)
Number of Light Sources	7
Product Dimensions	11.7"L x 8.8"W x 14.6"H
Manufacturer	Shenzhen Zhuoqiong Technology Co., Ltd.
Date First Available	January 7, 2025

MAINTENANCE

To ensure the longevity and optimal performance of your HOLDLAMP ZQ02356US Mini Moving Head DJ Light, regular maintenance is recommended:

- **Cleaning:** Regularly clean the exterior casing and optical lenses with a soft, dry cloth. Avoid using abrasive cleaners or solvents.
- **Ventilation:** Ensure that the ventilation openings are clear of dust and debris to prevent overheating.
- **Cable Inspection:** Periodically check all power and DMX cables for any signs of wear or damage. Replace damaged cables immediately.
- **Storage:** When not in use, store the fixture in a dry, dust-free environment, preferably in its original packaging or a protective case.

TROUBLESHOOTING

If you encounter any issues with your light fixture, refer to the following common troubleshooting steps:

- **No Power:** Check the power cord connection, the power outlet, and the unit's ON/OFF switch. Verify the fuse on the rear panel is intact and replace if blown.
- **No Light Output:** Ensure the dimmer setting is not at 0%. Check the selected operating mode.
- **No DMX Control:** Verify DMX cable connections are secure and correctly oriented (DMX IN to DMX OUT). Check the DMX address setting on the fixture and your controller. Ensure the DMX controller is functioning correctly.
- **Erratic Movement:** Reset the fixture by powering it off and on. Check for any obstructions to the moving head.
- **Overheating:** Ensure proper ventilation around the unit. Clean any dust from the cooling fan and vents.

WARRANTY & SUPPORT

For warranty information, please refer to the terms and conditions provided at the time of purchase or contact HOLDLAMP customer support. If you require technical assistance or have questions not covered in this manual, please contact the manufacturer or your retailer for support.

Manufacturer: Shenzhen Zhuoqiong Technology Co., Ltd.

