



Counter Fixed
Front with
Integral
Refrigeration



FPGWORD 3000 Series 1200mm curved in Counter Fixed Front with Integral Refrigeration Owner's Manual

[Home](#) » [FPGWORD](#) » FPGWORD 3000 Series 1200mm curved in Counter Fixed Front with Integral Refrigeration Owner's Manual 

Contents

- [1 FPGWORD 3000 Series 1200mm curved in Counter Fixed Front with Integral Refrigeration](#)
- [2 Specifications](#)
- [3 FEATURES](#)
- [4 OPTIONS & ACCESSORIES](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)



FPGWORD 3000 Series 1200mm curved in Counter Fixed Front with Integral Refrigeration



Specifications

RANGE	INLINE 3000 SERIES	
TEMPERATURE	REFRIGERATED	
MODEL	IN-3C12-CU-FF-IC	IN-3C12-CU-SD-IC
FRONT	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
REFRIGERATION	INTEGRAL, R513A	
HEIGHT	1161mm	
WIDTH	1203mm	
DEPTH	663mm	

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY

NZ & AU

For Star Rating, please visit reg.energyrating.gov.au/comparator

FEATURES

- High energy efficiency: 0.26 kWh per hour (average)
- Maintains an average of +2°C – +4°C core product temperature at Climate Class 3 25°C/60%RH with up to 60 door openings per hour
- Smart display with double-glazed glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Refrigerated Display

- Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 2758 lumens per metre in cabinet top
- Unique shelf mounted ticket strip front and rear: 30mm
- Extrusion at the top of the cabinet – front only – is fitted with a stainless steel panel that can be replaced with a branded insert

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- High internal humidity maintains and extends shelf life
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- FPG Freeflow air ventilation at rear eliminates the need for front ventilation panels
- Designed to be installed into joinery

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Remote refrigeration with TX, EPR or Solenoid valves for connection
- Shelf trays: Toughened safety glass or mild steel.
- Colour and woodprint options available for steel shelf trays
- 50,000 hour LED lighting to shelves
- Angled base insert
- Branded decals/insert
- Rear door or end glass mirror application
- Auto Condensate Removal (ACR)
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-3C12-CU-XX-IC	+2°C – +4°C	Climate Class 3 – 25°C / 60% RH	Integral	R513A	Manual/ACR1

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG2	HOURS	LUMENS	COLOR
IN-3C12-CU-XX-IC	220-240 V	Single	3.0 A	6.2	0.26	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural
ACR (Option)			1.7 A	9.6	0.40						

Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	DOOR OPENINGS @ +2°C – +4°C	CHASSIS CONSTRUCTION
IN-3C12-CU-FF-IC	1.4 m2	3 Shelves + Base	Fixed front	Sliding doors	60 per hour	Stainless 304 and mild steel
IN-3C12-CU-SD-IC	1.4 m2	3 Shelves + Base	Sliding doors	Sliding doors	60 per hour	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3C12-CU-XX-IC	1161 x 1203 x 663	100 kg



Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note;


Model cutout dimensions: IN-3C12-CU-XX-IC models require 1180 x 645mm benchtop cutout (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 3000 Series refrigerated, controlled ambient or ambient cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them. UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.




PLAN VIEW

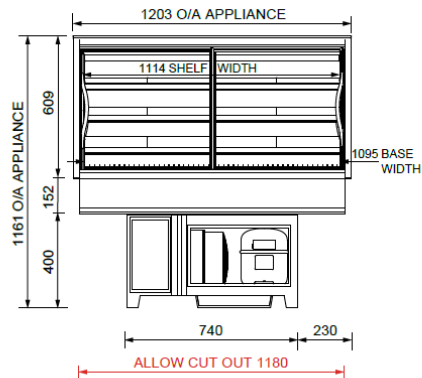

FRONT ELEVATION



SECTION VIEW



REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website. In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question?

Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Documents / Resources

	<p>FPGWORD 3000 Series 1200mm curved in Counter Fixed Front with Integral Refrigeration [pdf] Owner's Manual</p> <p>3000 Series 1200mm curved in Counter Fixed Front with Integral Refrigeration, 3000 Series, 1200mm curved in Counter Fixed Front with Integral Refrigeration, curved in Counter Fixed Front with Integral Refrigeration, Counter Fixed Front with Integral Refrigeration, with Integral Refrigeration, Integral Refrigeration, Refrigeration</p>
--	--

References

- [Energy Rating - Search the Registration Database](#)
- [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.