

FPGWORD

3000 Series 800mm
Curved in Counter Fixed
Front With Integral
Refrigeration



FPGWORD 3000 Series 800mm Curved in Counter Fixed Front With Integral Refrigeration User Guide

[Home](#) » [FPGWORD](#) » FPGWORD 3000 Series 800mm Curved in Counter Fixed Front With Integral Refrigeration User Guide 

Contents

- [1 FPGWORD 3000 Series 800mm Curved in Counter Fixed Front With Integral Refrigeration](#)
- [2 Product Usage Instructions](#)
- [3 Specifications](#)
- [4 FEATURES](#)
- [5 OPTIONS & ACCESSORIES](#)
- [6 REFRIGERATION DATA](#)
- [7 ELECTRICAL DATA](#)
- [8 CAPACITY, ACCESS & CONSTRUCTION](#)
- [9 DIMENSIONS](#)
- [10 FAQs](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)

FPGWORD

FPGWORD 3000 Series 800mm Curved in Counter Fixed Front With Integral Refrigeration



Specifications

- **Model:** 3000 SERIES 800 IN-COUNTER/CURVED REFRIGERATED
- **Height:** 1161mm
- **Width:** 803mm
- **Depth:** 663mm
- **Refrigerant:** R513A
- **Energy Efficiency:** 0.36 kWh per hour (average)

Product Usage Instructions

Installation

When installing the cabinet, ensure to maintain unobstructed airflow around the unit to guarantee optimal performance and uphold the warranty.

Capacity & Construction

- **Display Area:** 0.9 m²
- **Levels:** 3 Shelves + Base
- **Chassis Construction:** Stainless 304 and mild steel

Electrical Data

- **Voltage:** 220-240 V
- **Phase:** Single
- **Current:** 2.8 A
- **LED Lighting Hours:** 50,000

Refrigeration Data

- **Condensate Removal:** Manual/ACR
- **Lumens Colour:** Natural

Specifications

RANGE	INLINE 3000 SERIES	
TEMPERATURE	REFRIGERATED	
MODEL	IN-3C08-CU-FF-IC	IN-3C08-CU-SD-IC
FRONT	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
REFRIGERATION	INTEGRAL, R513A	
HEIGHT	1161mm	
WIDTH	803mm	
DEPTH	663mm	

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY

NZ & AU

For a Star Rating, please visit reg.energyrating.gov.au/comparator

FEATURES

High energy efficiency: 0.36 kWh per hour (average)

Maintains an average of +2°C – +4°C core product temperature at Climate Class 3 25°C/60%RH with up to 60 door openings per hour

- Smart display with double-glazed glass encased in brushed stainless steel frame
- Fixed Front or Sliding Doors Refrigerated Display
- Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000-hour LED lighting system at 2758 lumens per meter in cabinet top
- Unique shelf-mounted ticket strip front and rear: 30mm
- Extrusion at the top of the cabinet – front only – is fitted with a stainless steel panel that can be replaced with a branded insert

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- High internal humidity maintains and extends shelf life
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control, and durability
 - FPG Freeflow air ventilation at the rear eliminates the need for front ventilation panels
 - Designed to be installed into joinery



Showing :

Inline 3000 Series refrigerated 800mm curved in-counter fixed front with integral refrigeration

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Remote refrigeration with
- TX, EPR, or Solenoid valves for connection
- Shelf trays: Toughened safety glass or mild steel.
- Color and woodprint options available for steel shelf trays
- 50,000 hour LED lighting to shelve
- Angled base insert
- Branded decals/insert
- Rear door or end glass mirror application
- Auto Condensate Removal (ACR)
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-3C08-CU-XX-IC	+2°C – +4°C	Climate Class 3 – 25°C / 60% RH	Integral	R513A	Manual/ACR1

Option.

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG2	HOURS	LUMENS	COLOR
IN-3C08-CU-XX-IC	220-240 V	Single	2.8 A	8.69	0.36	IP 20	3 meter, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural
ACR (Option)			1.7 A	9.60	0.40						

Please advise the country to change the plug specification

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	DOOR OPENINGS @ +2°C – +4°C	CHASSIS CONSTRUCTION
IN-3C08-CU-FF-IC	0.9 m ²	3 Shelves + Base	Fixed front	Sliding doors	60 per hour	Stainless 304 and mild steel
IN-3C08-CU-SD-IC	0.9 m ²	3 Shelves + Base	Sliding doors	Sliding doors	60 per hour	Stainless 304 and mild steel

DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3C08-CU-XX-IC	1161 x 803 x 663	80 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note;

Model cutout dimensions: IN-3C08-CU-XX-IC models require 780 x 645mm benchtop cutout (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 3000 Series refrigerated, controlled ambient, or ambient cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them.

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN

WARRANTY.

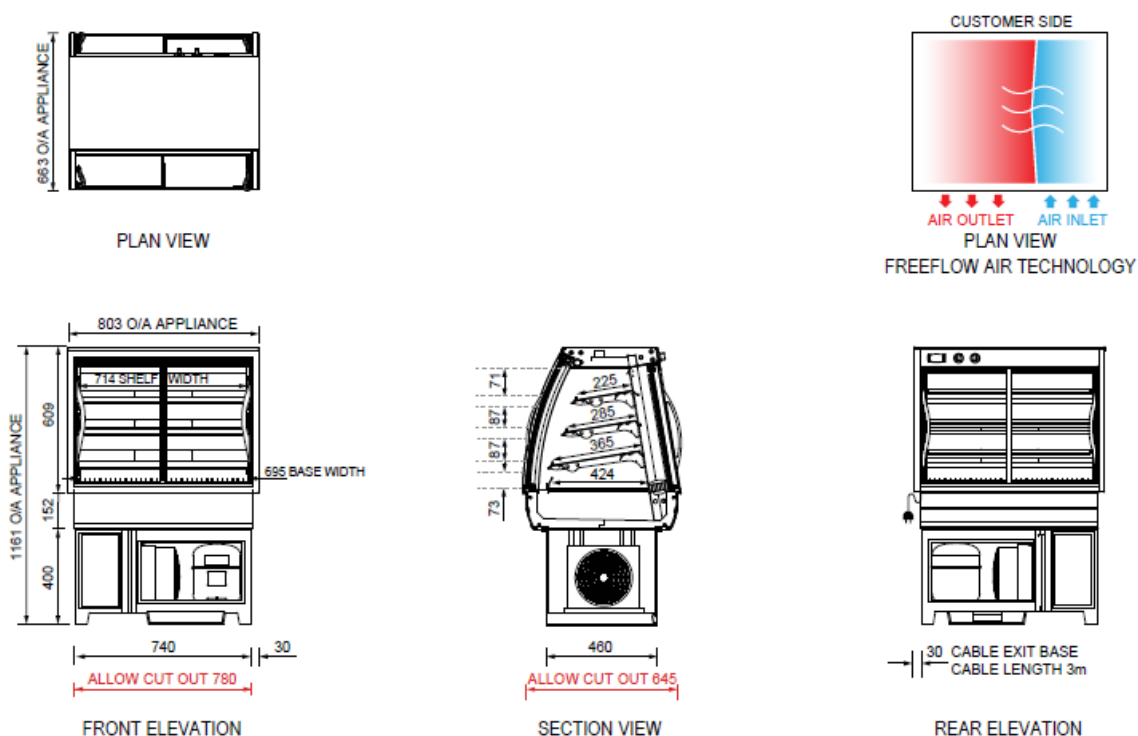

More information including technical data and installation guidelines is available from the Product Manual published on our website.

- In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice.

Have a question?

Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

SCAN QR CODE

- Worldwide contact details:
- 01/25 © 2025 Future Products Group Limited
- FPGWORLD.COM



FAQS

Q: Where can I find more technical information and installation guidelines?

A: Additional information, technical data, and installation guidelines can be found in the Product Manual available on our website.

Q: Can I install this cabinet next to another refrigerated cabinet from the same series?

A: Yes, when installing this cabinet next to an adjacent Inline 3000 Series refrigerated, controlled ambient, or ambient cabinet, please ensure to install an Inline 3000 Series thermal divider panel (accessory) between them.

Q: How do I contact FPG for options and accessories?

A: To explore options and accessories, contact a FPG Sales Representative or visit FPGWORLD.COM for more information.


Q: What are the energy efficiency details of this product?

A: The product boasts high energy efficiency with an average consumption of 0.36 kWh per hour.

Q: What is the recommended benchtop cutout size for this model?

A: IN-3C08-CU-XX-IC models require a benchtop cutout of 780 x 645mm. Refer to the product manual for installation guidance.

Documents / Resources

	<p>FPGWORD 3000 Series 800mm Curved in Counter Fixed Front With Integral Refrigeration [pdf] User Guide 3000 Series 800mm Curved in Counter Fixed Front With Integral Refrigeration, 3000 Series, 800mm Curved in Counter Fixed Front With Integral Refrigeration, Curved in Counter Fixed Front With Integral Refrigeration, Counter Fixed Front With Integral Refrigeration, Front With Integral Refrigeration, Integral Refrigeration, Refrigeration</p>
---	--

References

- [Energy Rating - Search the Registration Database](#)
- [FPG Home - FPG | Food Display Solutions](#)
- [User Manual](#)

