



**5000 Series Inline  
Freestanding  
Square Heated**



# FPGWORLD 5000 Series Inline Freestanding Square Heated Owner's Manual

[Home](#) » [FPGWORLD](#) » FPGWORLD 5000 Series Inline Freestanding Square Heated Owner's Manual 

## Contents

- [1 FPGWORLD 5000 Series Inline Freestanding Square Heated](#)
- [2 FEATURES](#)
- [3 OPTIONS & ACCESSORIES](#)
- [4 HEATED DATA](#)
- [5 Installation note](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)



**FPGWORLD 5000 Series Inline Freestanding Square Heated**



<b>RANGE</b>	INLINE 5000 SERIES	
<b>TEMPERATURE</b>	HEATED	
<b>MODEL</b>	IN-5H18-SQ-FF-FS	IN-5H18-SQ-SD-FS
<b>FRONT</b>	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
<b>INSTALLATION</b>	FREESTANDING	
<b>HEIGHT</b>	1443mm	
<b>WIDTH</b>	1807mm	
<b>DEPTH</b>	770mm	

<b>TEMPERATURE RANGE</b>	+55°C – +95°C
<b>RECOMMENDED CORE PRODUCT TEMPERATURE</b>	+65°C – +80°C
<b>ENVIRONMENTAL TEST CONDITIONS</b>	22°C / 65% RH

## FEATURES

- High energy efficiency: 4.15 kWh per hour (average)
- Cabinet operating temperature range +55°C – +95°C
- Recommended core product temperature +65°C – +80°C
- Smart display with double-glazed glass finished with a black trim

### **Fixed Front or Sliding Doors Heated Display**

Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support a maximum display capacity of 25,000 hours LED lighting system at 2758 lumens perimeter in cabinet top and to each shelf.

- Unique shelf-mounted ticket strip front and rear: 30mm

## **Operational Excellence**

- Sliding doors (staff side) and fixed front or sliding door options\ (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control, and durability
- Low wattage density element provides even temperature distribution
- Designed to be installed into joinery
- Fitted with adjustable 150mm legs (+30mm adjustment)
- Showing: Inline 5000 Series heated 1800mm square freestanding fixed front.

## OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Shelf trays: Toughened safety glass or mild steel.
- Color and wood print options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to the base: 30mm
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors, or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Custom joinery solution

Please contact FPG to discuss your requirements for meeting country-specific standards.

## HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CO RE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-5H18-SQ-XX-FS	+55°C – +95°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOR
IN-5H18-SQ-XX-FS	220-240 V	Single	27.1 A	99.6	4.15	IP 22	Fixed wiring 1	N/A	25,000	2758 per metre	Natural

Please see the manual for more information.

## CAPACITY, ACCESS & CONSTRUCTION


MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-5H18-SQ-FF-FS	2.2 m2	3 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-5H18-SQ-SD-FS	2.2 m2	3 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel

## DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-5H18-SQ-XX-FS	1443 x 1807 x 770	195 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.


## Installation note

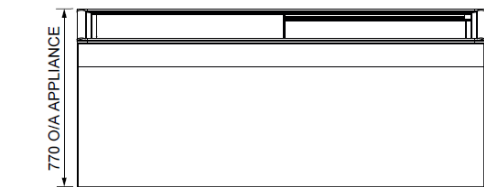


PLAN VIEW

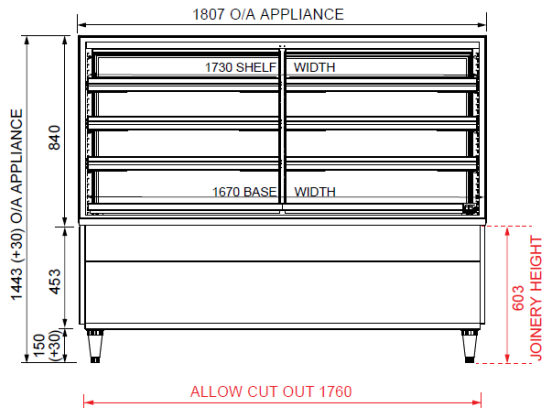

FRONT ELEVATION

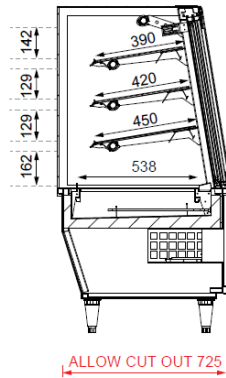

SECTION VIEW

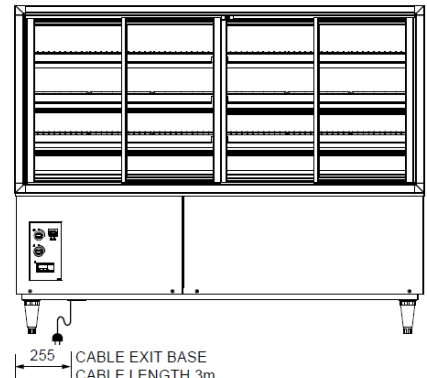

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website. In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice.

### Have a question?

Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region. 01/25 © 2025 Future Products Group Limited.

### Worldwide contact details



### Worldwide contact details:

Model cutout dimensions: IN-5H18-SQ-XX-FS models require a 1760 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide).

### Documents / Resources



**[FPGWORLD 5000 Series Inline Freestanding Square Heated](#)** [pdf] Owner's Manual  
5000 Series, 5000 Series Inline Freestanding Square Heated, Inline Freestanding Square Heate  
d, Freestanding Square Heated, Square Heated, Heated

References

- [FPG Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.