



FreshWater Smart Monitoring System Owner's Manual

[Home](#) » [freshwater](#) » FreshWater Smart Monitoring System Owner's Manual 

FreshWater Smart Monitoring System



Contents

- 1 Safety Information
- 2 System Overview
- 3 System Features Overview
- 4 Best Practice Start-up Process
- 5 Initial Set Up Of Smart Monitoring System
- 6 System Operation
- 7 Operational interference
- 8 Sensor Replacement
- 9 Troubleshooting
- 10 Customer Service
- 11 Documents / Resources
 - 11.1 References

Safety Information

(Read, Follow, and Save All Instructions)

ARNING: Operate the Smart Monitoring System only according to these instructions. The system is designed to be exclusively used with the FreshWater Salt System.
Do not use other chemical systems with the spa.

WARNING: Do not use the following products with Smart Monitoring System: FreshWater Mineral Spa Sanitizer or other silver nitrate products, ozone, bromine or MPS.

WARNING: Do not energize or operate the unit if the cartridge housing is damaged or improperly assembled.

WARNING: Do not operate the Smart Monitoring system in the unlocked position, controller and sensor must be installed per installation instructions.

WARNING: Do not operate the spa without water.

WARNING: To reduce the risk of electric shock, replace damaged cords or components immediately.

WARNING: Remove power from the spa before performing any maintenance or troubleshooting.

CAUTION: To avoid damage, DO NOT insert any foreign objects into the system housing.

CAUTION: Prior to using the spa, check water parameters and treat and adjust as necessary.

CAUTION: NOT compatible with bromine or BaquaSpa® (biguanide).

CAUTION: Do not use Calcium Hypochlorite or Trichlor tablets with system.

CAUTION: Do not use splash-free or scented liquid chlorine or bleach.

NOTE: The system must be used in conjunction with FreshWater Salt System. When using the spa, the chlorine level must be maintained between 1-5 ppm. Supplement sanitizer generation with Sodium Dichlor (chlorine), liquid Sodium Hypochlorite (chlorine), only as needed.

DISCLAIMER: This is not an automatic water care system. Supplemental use of FreshWater 5-way Test Strip is recommended in order to maintain proper Alkalinity and Calcium Hardness.

Carefully review the entire Owner's Manual before using the Smart Monitoring System, and keep this manual available for reference. If you have any questions about your Smart Monitoring System setup, operation, or maintenance, contact your authorized dealer.

THE SPA OWNER IS ULTIMATELY RESPONSIBLE FOR MAINTAINING PROPER SANITARY WATER CONDITIONS.

VERY IMPORTANT:

Before Installing the FreshWater Smart Monitoring System:

- The FreshWater Salt System **MUST** be completely installed.
- The FreshWater Salt System **MUST** be up and running, generating chlorine, and holding the required residual ppm.
- Once the Smart Monitoring System controller and sensor are installed it may take 24 hours before the Smart Monitoring System is fully functional.



System Overview

FreshWater Smart Monitoring System is used to monitor the spa water quality in order to simplify your water care management:

- Measures and displays water quality for: Chlorine, Salt and pH levels
- Displays FreshWater Monitoring System Sensor life and FRESHWATER Salt cartridge life
- Provides users access to water care status via the topside control.
- Takes measurements every hour to ensure the most accurate information.
- Provides feedback and recommendations to manage water chemistry (Chlorine, pH & Salt).
- With proper water care, the sensor can last up to 12 months

IMPORTANT: Smart Monitoring System will **ONLY WORK** when Salt System is installed and operational.

- Smart Monitoring System Housing and Cap – The bar top accessible housing and cap holds the FreshWater Smart Monitoring System allowing for easy replacement.

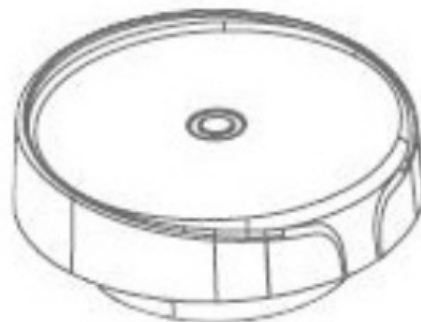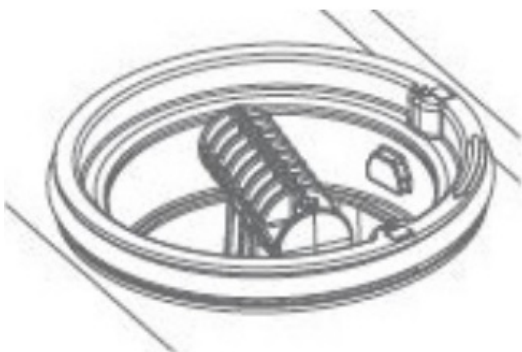


- Smart Monitoring System Plug – This is a factory installed non-functional plug inside the Smart Monitoring

System Housing and should not be removed until you are ready to install the assembled controller and sensor. Follow the start-up guide that comes with the sensor to install for the first time. Keeping this plug is recommended.



- Smart Monitoring System – Installed in the housing, easily accessible from the top of your spa, the system is comprised of a controller and a replaceable sensor.

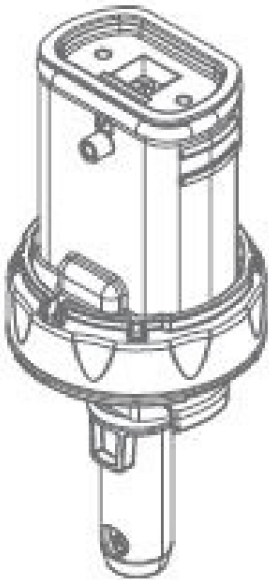

System Features Overview

The Smart Monitoring System monitors your water throughout the day and updates the Chlorine, pH, and Salt displays on an hourly basis. FreshWater 5-Way test strips should be used to test and maintain alkalinity and calcium levels at start-up and every two weeks.

Depending on your spa model one of these 2 screens will appear once you enter the water care screen.



Touch Screen Display





Button Display

Chlorine

The chlorine level in the spa is displayed in the labeled status indicator.

The green band represent 1-5 ppm.

If you have a touch screen display press the Chlorine status indicator, if not then press:

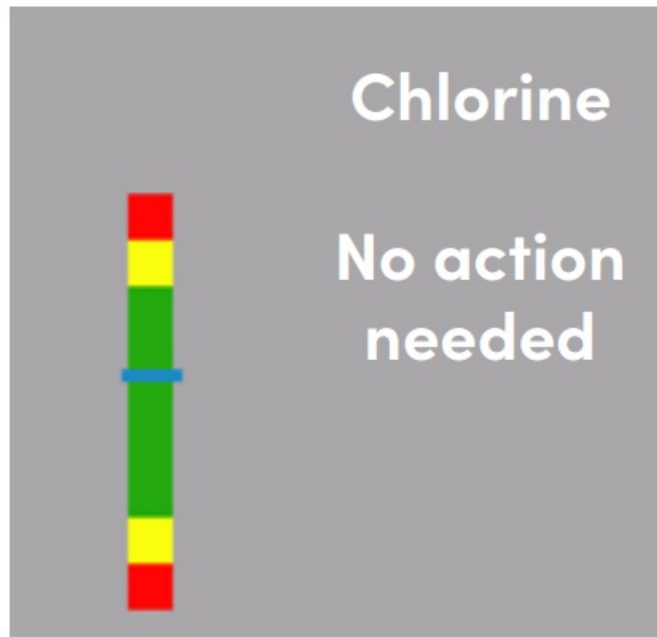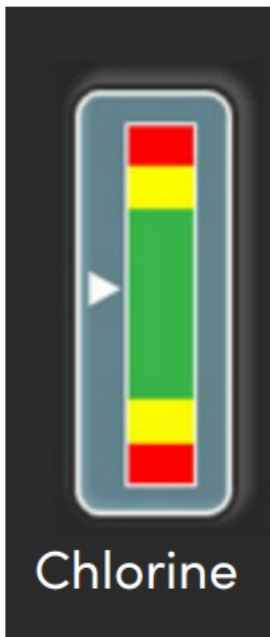



- Chlorine soft button

pH

The pH level in the spa is displayed in the labeled status indicator.

The green band represent 7.2 – 7.8.

If you have a touch screen display, press the pH status indicator, if not then press:

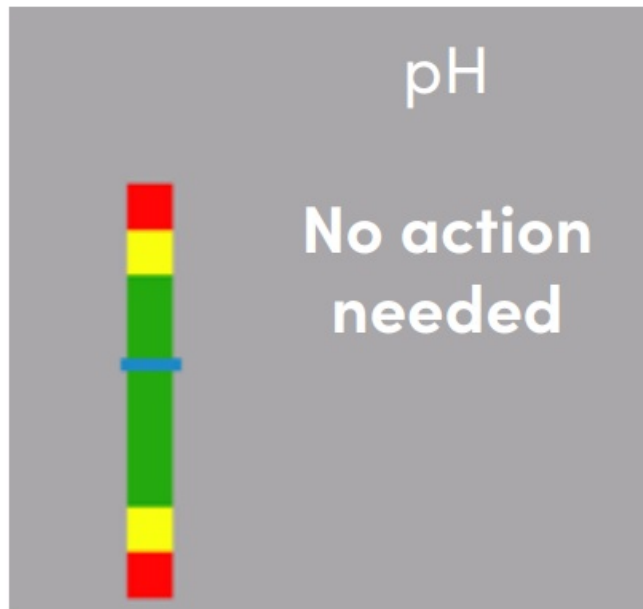
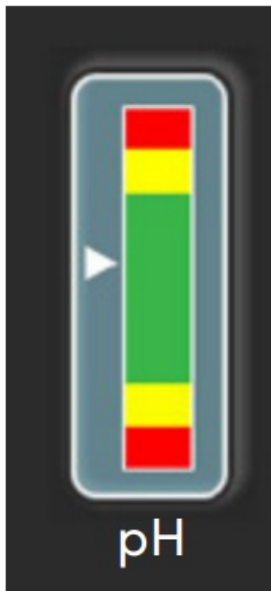


- pH soft button

Salt

The salt meter has low red, low yellow and green bands to provide status on the amount of salt added to the spa water during the FreshWater Salt start-up process. It is recommended to add FreshWater Spa Salt to keep the level in the middle green band. If the salt indicator is outside of the green band, follow the on-screen recommendations, to either partially drain the spa if in high yellow or high red or to add additional spa salt if in low yellow or low red.

If you have a touch screen, press the Salt status indicator, if not then press:

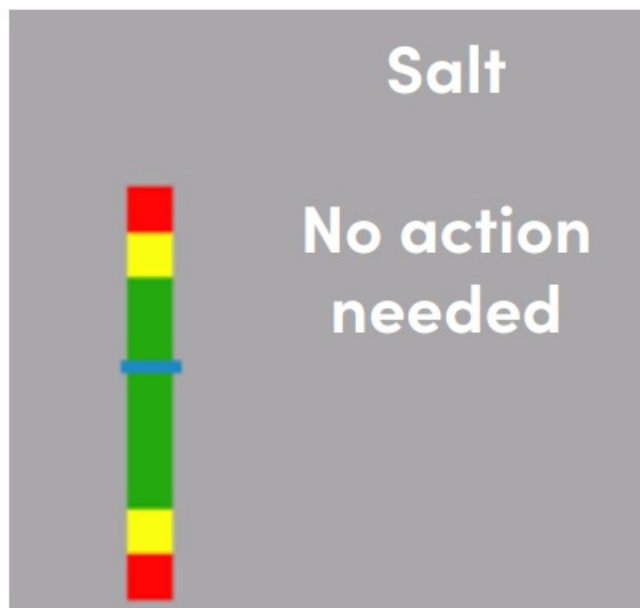
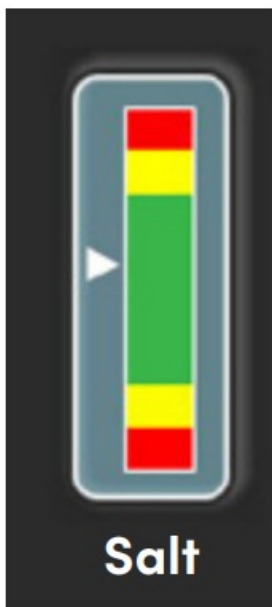


- OPTION hard button
- Water Care soft button
- Salt soft button

Salt Cartridge

The cartridge display represents the FreshWater Salt System cartridge life when Smart Monitoring System is installed and turned on.

If you have a touch screen display, press the Cartridge status indicator, if not the press:

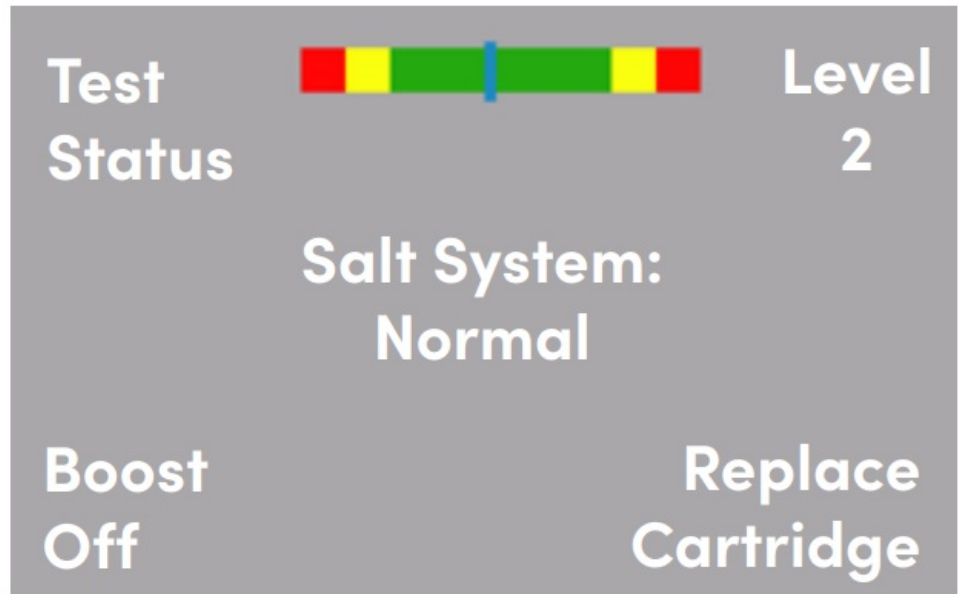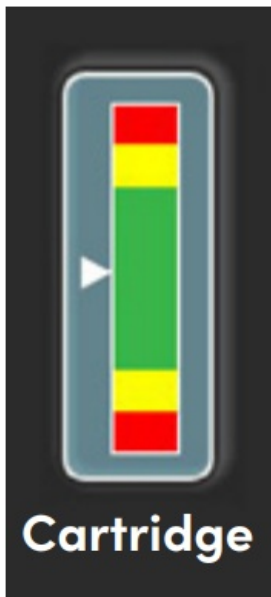

- NEXT soft button
- FreshWater Salt System soft button.

Best Practice Start-up Process

It is recommended to install the FreshWater Salt System and have it fully operational first before installing the Smart Monitoring System. If the Smart Monitoring System is installed at the same time, the Smart Monitoring System should be turned off. To turn off the Smart Monitoring System:

Touch screen display

- Press the Sensor status indicator
- Move System button to Off position

Button display

- Press NEXT soft button
- Press Sensor soft button.
- Press System Off Soft button.

If the Smart Monitoring system is installed and / or turned on prior to the FreshWater Salt System being fully operational, the system will have incorrect recommendations for chlorine, pH and salt.

1. Install the FreshWater Salt System Cartridge using the instructions provided with the FreshWater Salt System Owner's Manual.

2. Using the Salt System Manual, follow and complete the entire Getting Started section. NOTE, it is important that initial chlorination must be 5 ppm residual.
3. Spa water must be holding at 3ppm daily, chlorine range and target may vary by country. Consult local authority.

DO

- Test and balance spa water
- Maintain water within target parameters
- Make sure FreshWater Salt startup process is complete
- Test and treat for metals as needed
- Use FreshWater 5-way and FreshWater Salt test strips during FreshWater salt start up & follow-up Initial chlorination, pH and Salt level
- Continue to use 5-way test strips every two weeks to test for:
 - a. Test for Calcium hardness
- Test for Alkalinity levels
- Continue to use FreshWater Phosphate test strips every two weeks to test for phosphates
- Manage phosphate levels with FreshWater phosphate remover

It is recommended to have your source water tested prior to FreshWater Salt System installation.

DON'T

- Use FreshWater mineral spa sanitizer or other silver nitrate products.
- Use Ozone
- Use Bromine
- Use MPS

Once the FreshWater Salt System is fully operational, install the Smart Monitoring System per instructions.


WARNING: False readings will occur if the Smart Monitoring System is activated before start-up is complete. The Smart Monitoring system will not be accessible if the FreshWater Salt system is not installed or not turned on (Output Level 0).

Initial Set Up Of Smart Monitoring System


Turn power to spa off (reference Spa Owner's Manual)

NOTE: You will need a Phillips head screwdriver

1. Rotate the Smart Monitoring cap counterclockwise and lift up to remove.

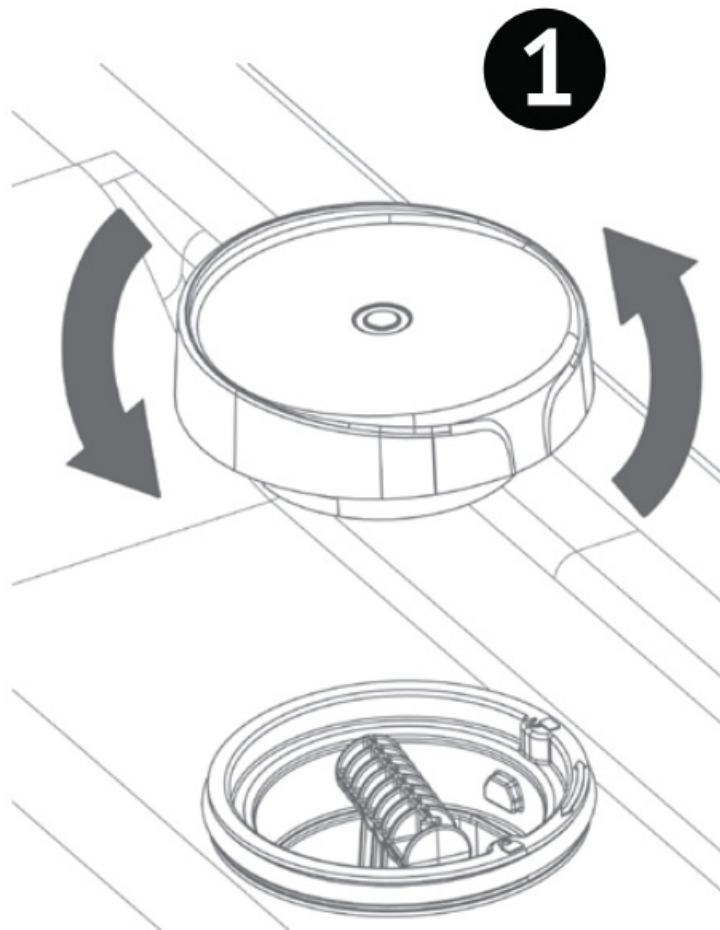

2. Rotate the Smart Monitoring plug counterclockwise to the unlock position and lift out.

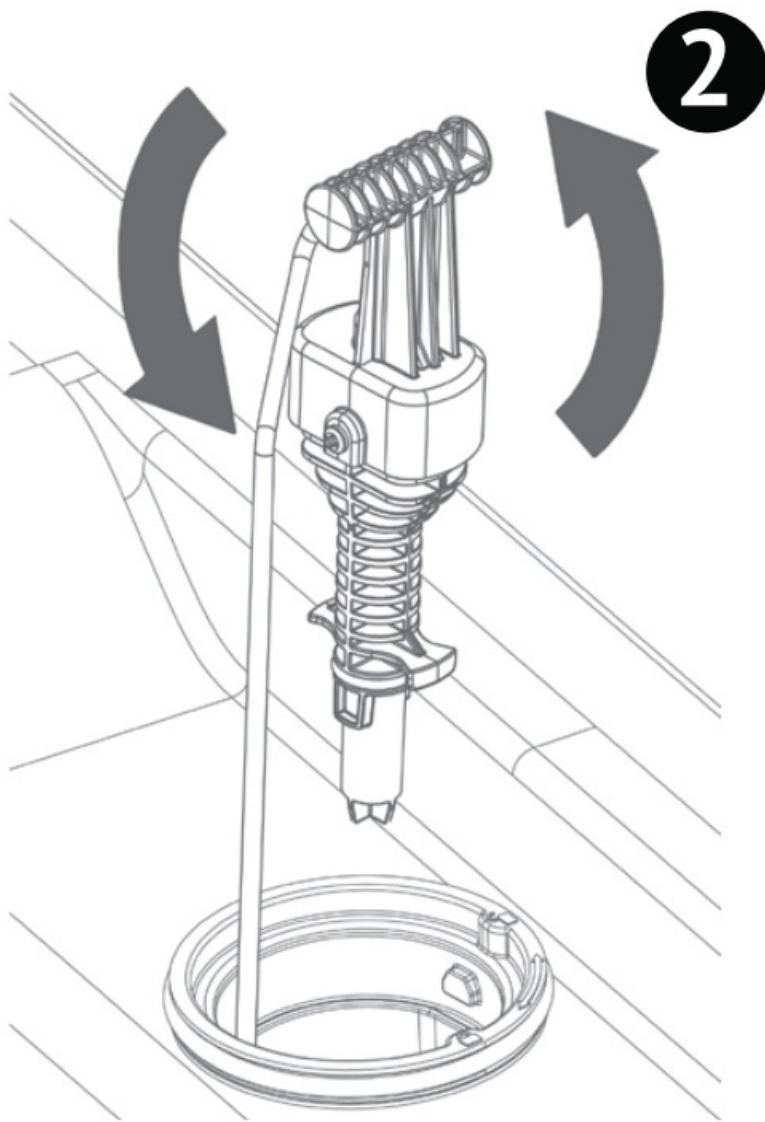


3. Using the Phillips head screwdriver, carefully remove the screw and separate the plug from the handle.


Handle

3


Plug

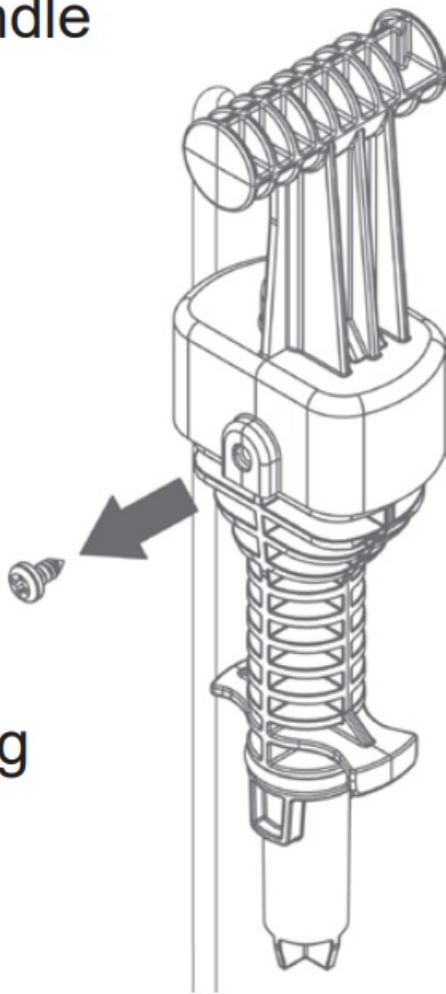


4. Fit the pre-assembled controller and sensor to the handle and replace the screw.

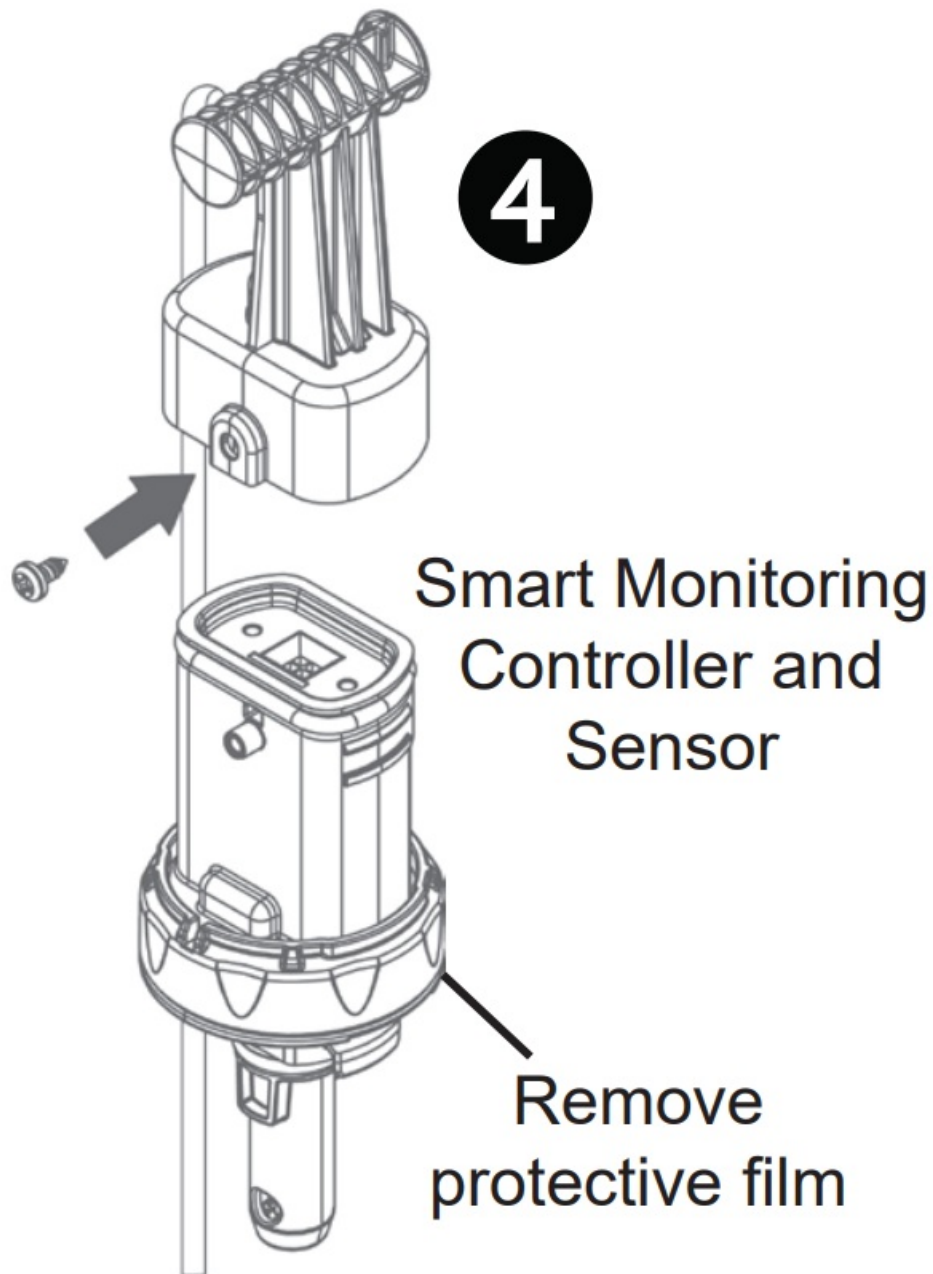

5. Align the handle arrow to the unlock position, fully insert into the housing, push down to fully insert into the housing, and rotate clockwise to the lock position.

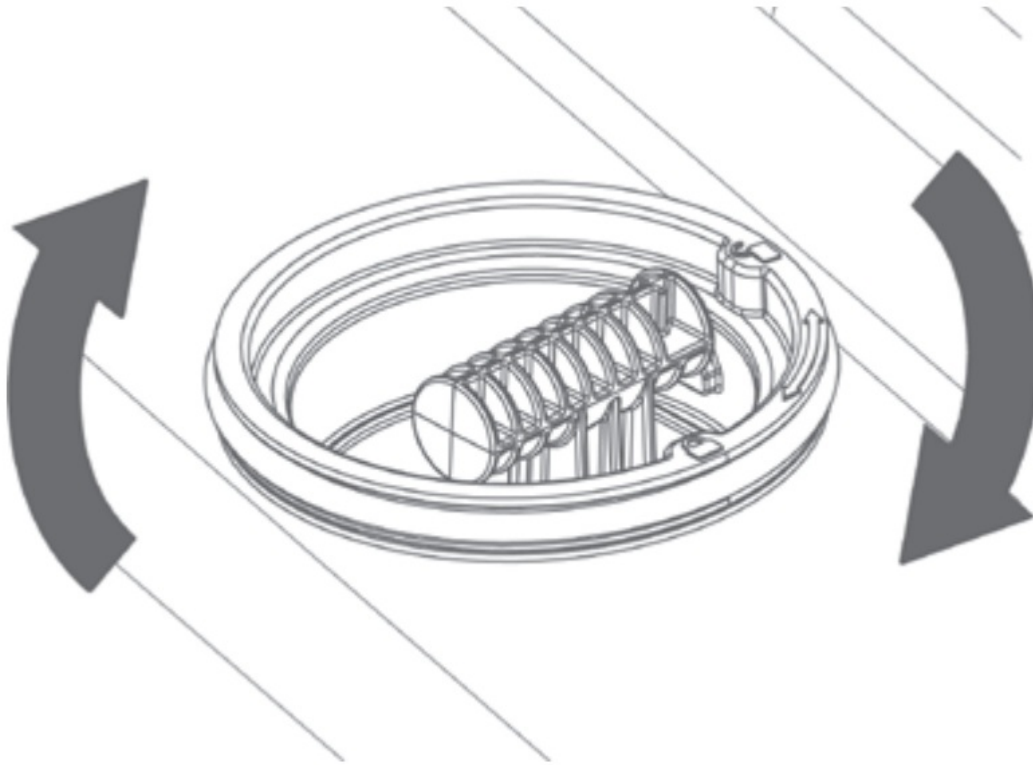

6. Replace the Smart Monitoring cap and turn clockwise to tighten.
Turn Power to spa back on (reference Spa Owner's Manual).

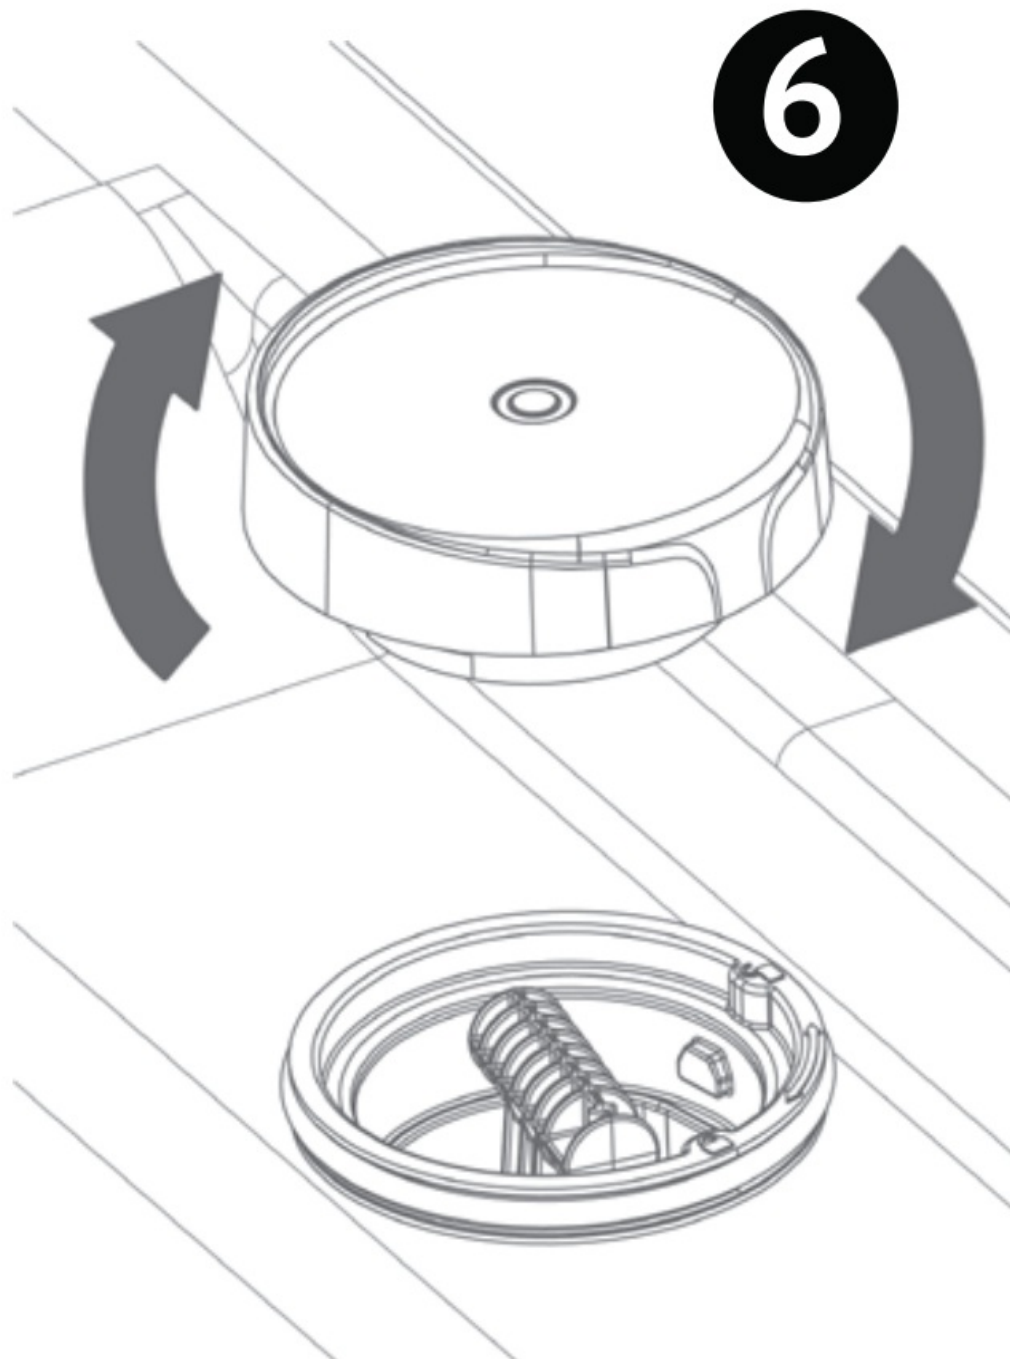

IMPORTANT: The Smart Monitoring System will take 24 hours to become fully operational. The chlorine and pH values will not be displayed during that time and “24 hour ini

System Operation

Home Screen

The spa home screen is the entry into the Smart Monitoring System.

For touch panel equipped spas, a water care droplet icon is present to access the Smart Monitoring System. Button panels use the Options hard button to access WaterCare menu. The icon will light up or “Watercare” will be shown yellow or red depending on the panel when attention is needed.

Dashboard

The touch panel WaterCare dashboard illustrates the five core features of the Smart Monitoring System in status

meter format. Each meter is a pressable button used to access a detail recommendation screen for

Chlorine, pH, Salt, and Sensor, while Cartridge accesses the FreshWater Salt System (Salt System) control. When a value for one of the values is in yellow or red, a colored indicator will appear on the meter to direct the user to review the details of the parameter.

For the button control panels, the WaterCare menu items are broken down into a main screen offering Chlorine, pH, Salt and a second screen offering Sensor and Cartridge access. Each parameter menu item will change to yellow or red when the parameter value moves into the yellow or red band.

Notification management

Individual parameter meters or menus will change color when attention is needed from the user. Although the individual parameters will show their represented state, the Spa home screen will show a single indicator with red being shown in priority over yellow parameters.

The individual notifications are cleared when the detailed parameter recommendation screen is viewed. Notifications that have been cleared will not be reposted for 24 hours to allow time for changes to the water to take effect. If after 24 hours the parameter is still in yellow or red, the notification will be presented again. Otherwise, if the parameter is in the green band, no notification will be shown.

Operation and Parameter Recommendations


It is important to start-up and maintain the spa water and Salt System as directed in the Salt System manual and best practices. The Smart Monitoring system, which works in conjunction with the Salt System, requires the same water chemistry and maintenance for best performance. Smart Monitoring System provides feedback on chlorine, pH, and salt values.

Test strips are needed to properly balance the water and adjust calcium hardness and alkalinity

System System Parameter	Target	OK Range Min Max	
Salt	1,750 ppm	1,500 ppm	2,000 ppm
Hardness	50 ppm	25 ppm	75 ppm
Alkalinity	80 ppm	40 ppm	120 ppm
pH	7.4	7.2	7.8
Chlorine*	3 ppm	1 ppm	5 ppm
Phosphates	<150 ppb	0 ppb	300 ppb


*Chlorine range and target may vary by country. Consult local authority.

Chlorine is the primary parameter needed to keep the water safe and sanitized. The Salt System generates chlorine from the salt added to the water and the amount produced is controlled by the output level. When the output level matches the chlorine demand, the parameter will display in the green. If the output is low (not enough chlorine residual), the display will fall into the low yellow or red. If the output is high (excessive chlorine residual), the display will increase into the high yellow or red.

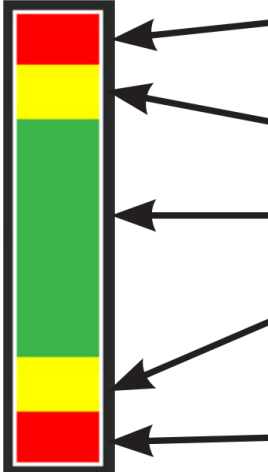
<h1>Chlorine</h1> 	Status	Recommendation
	High Red	Decrease output level by 2
	High Yellow	Decrease output level by 1
	Green	No Action needed
	Low Yellow	Increase output level by 1
	Low Red	Increase output level by 1 and boost

Recommendations are provided to adjust the Salt System output to help maintain values in the green band. The user is required to adjust the Salt System as needed to maintain a chlorine residual.

pH is an important parameter affecting the effectiveness of the generated chlorine. It is controlled by adding FreshWater pH Up and FreshWater pH Down. Depending on water conditions, usage, and chlorine generation rate, the pH will drift upwards and need periodic adjustment. When the Smart Monitor detects that the pH is out of the green band, guidance will be provided to correct the reading. It is important to first focus on keeping the chlorine value in the green as this can affect the pH reading. Also after making a pH correction, allow the system 24 hours to equilibrate before adding a follow-up dose.
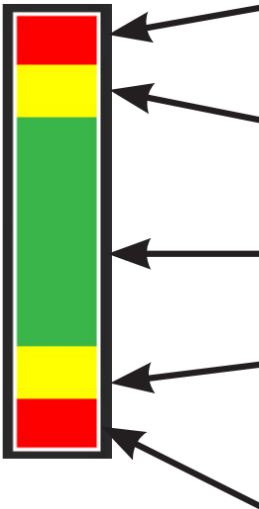
<h1>PH</h1> 	Status	Recommendation
	High Red	Add 3 tsp pH Down and wait 24 hours before adding more
	High Yellow	Add 1 tsp pH Down and wait 24 hours before adding more
	Green	No Action needed
	Low Yellow	Add 1 tsp pH Up and wait 24 hours before adding more
	Low Red	Add 3 tsp pH Up and wait 24 hours before adding more


The SALT parameter is an important value used by both the Smart Monitoring System as well as the Salt System. The salt status indicator reflects the amount of spa salt added to the spa water. Maintaining a value in the center of the green band is optimal for the system performance. Add salt per the Salt System start up process and make adjustments once the Smart Monitor is online. The indicator updates hourly to allow time for the adjustment to take effect.
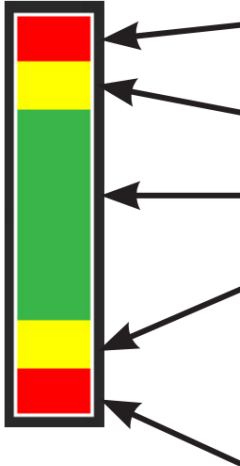
<h1>Salt</h1> 	Status	Recommendation
	High Red*	Drain 25% of water and refill. Test salt and all water system levels
	High Yellow	Monitor salt level
	Green	No Action needed
	Low Yellow	Add 1 cup of salt and run jets for 10 minutes
	Low Red	Add 2 cups of salt and run jets for 10 minutes


* Recommend to turn off spa during drain and refill

The Salt System cartridge performance and operation is dependent on adding the correct amount of salt to the spa.

The Smart Monitor sensor displays the unit's life and condition. The Monitor tests the water on an hourly basis and reports the latest information, including the monitor condition to the spa. The monitor detail screen provides the operation recommendations as well as any conditions or errors that are encountered.

<h1>Sensor</h1> 	Status	Recommendation
	Green	No Action needed
	Yellow	Prepare to replace
	Red	Replace cartridge

FreshWater Salt Water operation is enhanced with the addition of the Smart Monitor System. To access the full set of Salt System functions, press the Cartridge menu icon/button. See the Salt System manual for explanation of the system. NOTE, the Smart Monitor's dedicated Salt meter provides separate guidance to maintain the correct salt level.
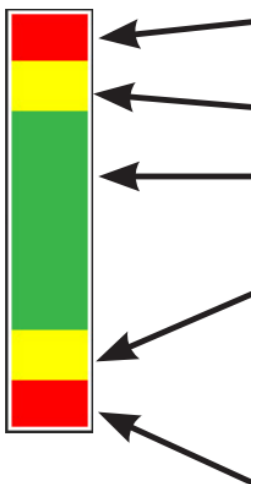
<div> <h1>Cartridge</h1>  </div>	Status	Recommendation**
	High Red	Not applicable when system is installed
	High Yellow	
	Green	No Action needed
	Low Yellow	Prepare to replace
		Increase water temperature over 95°F/35°C
	Low Red	Replace cartridge now
		Adjust salt level
		Increase water temperature over 95°F/35°C
		System off

** Messaging with Smart Monitor installed. See the Salt System manual for messaging and operation without the Smart Monitor.

Salt System Messaging with Smart Monitoring System active:

Message	Remark
System initializing	Waiting for information from the Smart monitor
No action needed	Operating correctly
Increase water temperature over +95 F/35C	FWSS is reading low and the water temperature should be increased to verify operation
Adjust salt level	FWSS operating low due to low salt level in the water
Prepare to replace cartridge	Cartridge is wearing down and should be replaced
Replace cartridge now	Cartridge has expired
Inspect cartridge for damage	Cartridge is operating out of range. Inspect it for damaged or bent electrodes

With Smart Monitoring System installed, the messaging and function of the status indicator changes to directly reflect the life of the cartridge. The system messaging is also updated to provide better guidance to make adjustments to the operation.

Operational interference

There are a variety of water conditions that can interfere with the proper operation of the Smart Monitor System. Many conditions will result in an offset of the chlorine or pH reading, making the system chronically off by 1 ppm or more as compared to a test strip or reference measurement.

Other variables can cause the system to become erratic and values will change erratically test to test:

- Use of FreshWater Mineral Spa Sanitizer or other silver nitrate products can permanently offset readings.
 - Remove the silver device, drain and refill the spa, and replace the sensor.

- Use of MPS. Smart Monitoring System is not calibrated to this type of chemistry.
 - Stop use and allow up to one week for the MPS to dissipate.
- Use of ozone unit. System is not calibrated for ozone use.
 - Remove ozone unit from the spa.
- Excessive use of discolor and CYA build up will dampen chlorine response.
 - Drain and refill the spa.
- Very low alkalinity will offset pH readings.
 - Increase alkalinity to within the recommended range.
- Fill water that has not been shocked following Salt System start-up process can cause an incorrect chlorine reading.
 - Shock the water at start-up per FreshWater Salt best practices.
- Regularly test for calcium and phosphate levels and treat as recommended per FreshWater Salt system.
- The system requires adequate water flow. Rinse and clean filters per the Spa Manual recommended schedule.
- If topping off spa water, treat for metals with the FreshWater Clean Screen pre-filter as needed.

Winterizing the spa – When the spa is winterized and drained, it is recommended to complete the winterization process and then remove the smart monitoring system from the housing and shake out excess water. Remove water in the bottom of the housing with a sponge or similar and reinstall the Smart Monitor.

Important Additional Information

WARNING: Operating the Smart Monitoring System in the unlocked position can damage the sensor. The system will not operate correctly.

WARNING: To reduce the risk of injury, do not permit children to operate this device.


WARNING: Maintaining high salt and chlorine levels above recommended range can contribute to corrosion of spa equipment.

IMPORTANT: Use only original FreshWater Sensor part number 80202 when replacing the sensor.

Lost Screw Replacement

If the screw that connects the sensor to the controller is lost and needs to be replaced you will be able to purchase a new one at your local hardware store. The specification of the screw are as follows:


- #8 x 3/8" pan head sheet metal stainless steel screw. OR
- M 4.2 x 9.5 mm pan head sheet metal stainless steel screw.

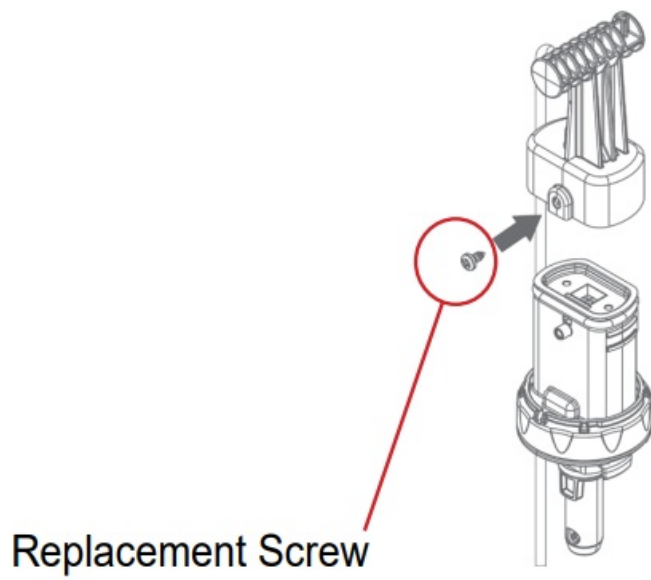


Sensor Replacement

1. Turn power to spa Off.


Rotate the Smart Monitoring cap counterclockwise and lift up to remove.

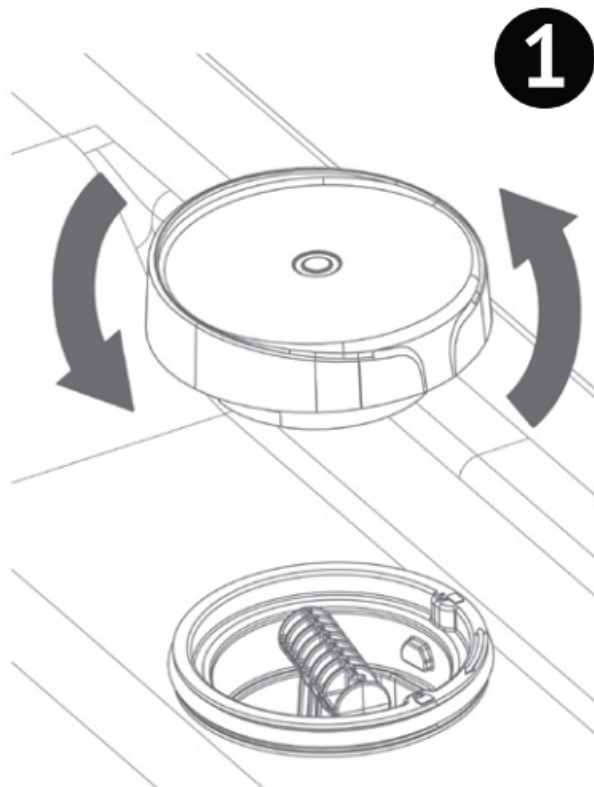


2. Rotate the Smart Monitoring controller with sensor counterclockwise to unlock and lift out.

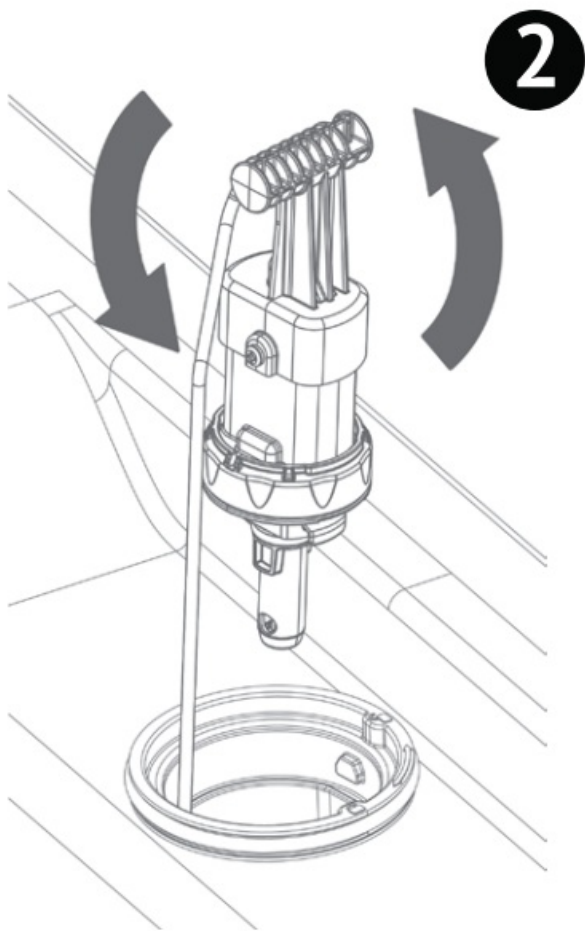

3. With the sensor pointing up, rotate the locking ring clockwise to release the sensor. Then remove the sensor.

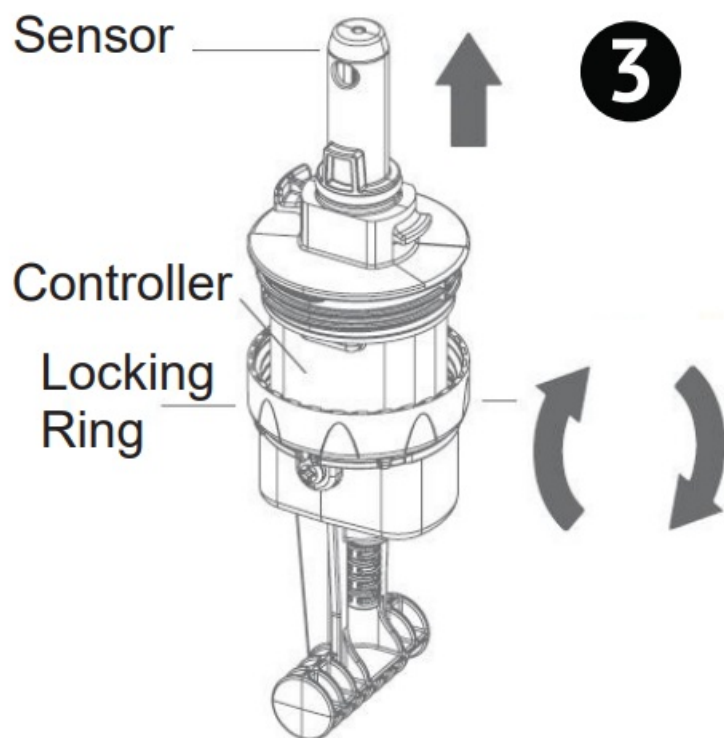


4. Attach the replacement sensor to the controller and rotate the locking ring counterclockwise to lock.

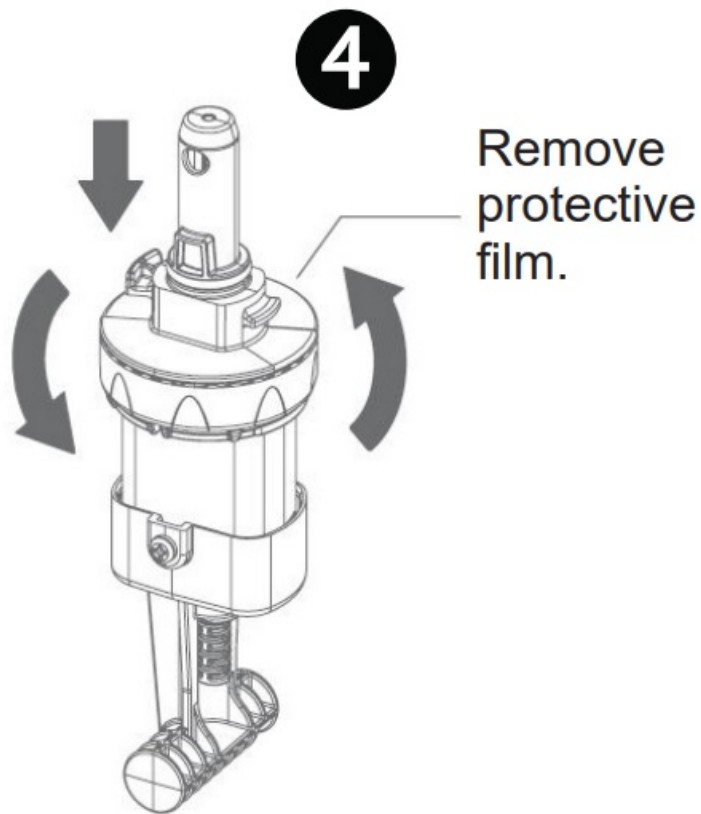


5. Align the handle arrow to the unlock position, fully insert into the housing, push down, and rotate clockwise to the lock position.

IMPORTANT: The system will not work correctly unless the Smart Monitoring handle is fully rotated to the locked position.

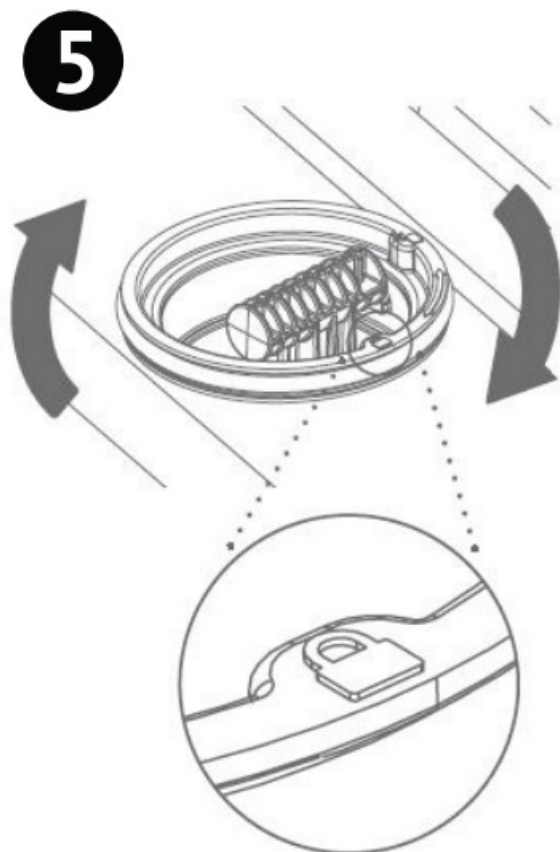

6. Replace the cap and turn clockwise to tighten.
Turn the power to your spa back on.

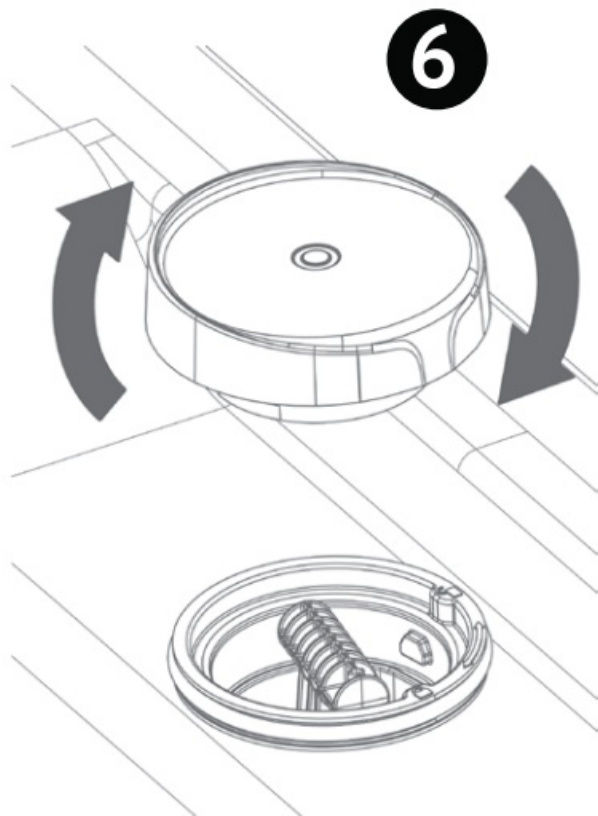

Troubleshooting

Maintenance Checks

- Maintain the water to the recommended guidelines in the spa and FreshWater SALT SYSTEM manuals.
- Continue to monitor and address the FreshWater Salt System 10-Day timer.
- If the spa water, FreshWater SALT SYSTEM, or SMART MONITORING SYSTEM sensor have been exposed to products not recommended by Watkins Wellness or for example excessive oil based products or cosmetics, the SMART MONITORING SYSTEM performance may be impacted. The sensor electrodes, normally silver in color, can be covered in chemical contamination and take on a brown color or oily appearance and require replacement.

No Chlorine Reading

The system cleans spa water differently than manually added chlorine. Since the water is cleaned before the chlorine residual is established, only a small chlorine residual is needed. If there appears to be no chlorine in the water:

- Check output level. If the spa is used frequently the FreshWater Salt System Output may need to be increased to a higher number.
- High Phosphates. Phosphate levels over 300 ppb can result in high chlorine demand and difficulty keeping a residual. Treat the water or fill spa with low phosphate water
- Low salt. Target middle of the green in the SALT meter
- Shock. Boost system or manually add chlorine to clean the water and develop a chlorine residual.
- Cyanuric acid lock. If the Output and Power levels are set to maximum and dichlor or shock has been added

daily to supplement the water and the chlorine reading is back to zero ppm the next day, it is possible that the salt system is reacting to the specific water chemistry or metal content and is being inhibited by the cyanuric acid from the dichlor. Typically, this can occur at CYA levels over 50 ppm, however some water chemistries can cause this at 5-10 ppm.

1. Completely drain the spa
2. Rinse thoroughly
3. Refill the spa while using metal and softening treatment, as necessary.
4. Restart the spa and only use liquid chlorine (sodium hypochlorite) to supplement the spa.

IMPORTANT Shock the spa water with chlorine at startup. Skipping this step can prevent the system from establishing a chlorine residual. If metals are present, delay shocking the water until treatment is complete.

High Chlorine

The system will continue to produce chlorine according to the selected output level, regardless of whether the spa is used or not. If the hot tub is used less frequently, it is important that you lower the output level. Prolonged exposure to elevated levels of chlorine can damage components and rust the jets. If the chlorine level is too high:

- Check output level. You may need to decrease the output level to a lower number.
- Reduce chlorine. Add 1 cup (240ml) hydrogen peroxide with jets running.
- Confirm Power Level. Lower the power level if setting Output to the lowest level does not reduce chlorine generation enough.

Issue Diagnosis:

Condition	Detail	Action
No WaterCare menu or Icon	FreshWater Salt not installed	Install FreshWater Salt
Only the FreshWater Salt menu is accessible	Smart Monitoring System not installed	Install the Smart Monitoring system
	Smart Monitoring System is damaged and not communicating to the spa	Inspect the controller and replaceable sensor for damage. Replace components. Contact dealer for additional support
Chlorine and pH missing status and not accessible	Message: 24 Hour Initialization Period	Sensor is running 24 hour initialization
	Salt is reporting low red	Correct the salt level to begin testing
Parameter icons/options (chlorine, pH, Salt) are visible but not accessible	Status indicators are missing	Freshwater Salt in error state
		Smart Monitor "Off"
Spa displaying very different results from a test strip	Chlorine	If a new fill, add a shock dose of chlorine to clear and initialize the water
		If water is 0 ppm and dirty, Boost the Salt System and or add chlorine to recover the water back into the recommended ranges.
		Adjust parameter off-set
	pH	If chlorine is not in the green, correct first
		Adjust parameter off-set
	Sensor	Sensor damaged/ expired, replace

What to do if the Replacement Sensor is dropped into the spa

Quickly remove the sensor and rinse with water, distilled water is preferable. Shake all excess water from the part and place in a bag of rice for 48 hours.

Conditions Affecting System Operation:

Condition	Diagnosis / Resolution
Smart Monitoring System not fully seated in the housing	Cap will not fit – no flow through sensor – erratic readings, sensor damage
Smart Monitoring System seated but not in locked position	Cap will not fit – no flow through sensor – erratic readings, sensor damage
Incomplete start-up process	Water not balanced, low chlorine – incorrect sensor readings
Low salt level in water < 1750 ppm	pH and chlorine not tested
Low chlorine level < 1 ppm	Incorrect pH values
Low alkalinity < 40 ppm	Incorrect pH values
Use of AG+ or silver nitrate products	Reading offset – chlorine high, pH low
High chlorine > 10 ppm	May affect readings depending on other water parameters. Spa damage and rust/ iron in the water contaminating the sensor
Using non-chlorine/Salt system or ozone	Incorrect readings

Customer Service



WatkinsWellness®

If you have any questions about your FreshWater Smart Monitoring System that have not been answered by this manual, consult your authorized dealer.

For Warranty information, please reference full warranty located in the Smart Monitoring System Start-up Kit Quick Start Guide (PN 63693).

Watkins Wellness ®
can be reached at:

1-800-999-4688 (extension 8432) inside the USA or
+1 760-598-6464 (extension 8432) outside the USA
Monday through Friday, 8 am to 5 pm Pacific Standard
Time (PST) or by emailing:


customerservice@watkinsmfg.com.

IMPORTANT: Watkins Wellness reserves the right to change specifications or design without notification and without incurring any obligation.

Watkins Wellness
1280 Park Center Drive



Documents / Resources

	<p>FreshWater Smart Monitoring System [pdf] Owner's Manual Smart Monitoring System, Smart, Monitoring System, System</p>
------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------

References

- [User Manual](#)

[Manuals](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.