



Futaba S3001 Standard Servo Instruction Manual

[Home](#) » [Futaba](#) » Futaba S3001 Standard Servo Instruction Manual 

Futaba®

Contents

- [1 S3001 Standard Servo](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)


S3001 Standard Servo



**STANDARD SERVO
S3001**

Pulse width control system
 Ballraced servo
 Special long-life servo motor
 Indirect-drive potentiometer, protects pot from shock loads
 Surface-mount amplifier construction
 High torque

- Power requirement : 4.8 V 6.0 V
- Idle current : 12 mA
- Torque : 3 kg-cm
- Speed : 0.22 sec/60°
- Size : 40.4 × 19.8 × 36 mm (1.59 × 0.78 × 1.42 in)
- Weight : 45.1g (1.59 oz)

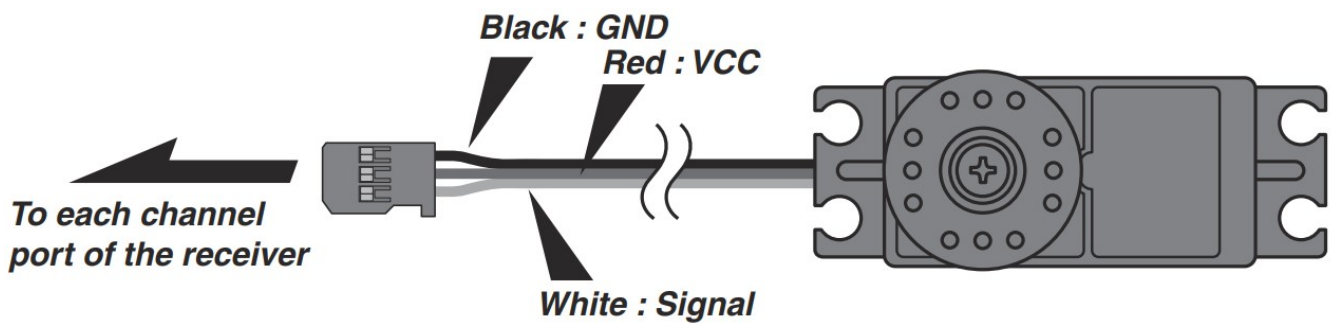

Futaba®
 FUTABA CORPORATION

	Futaba S3001 Standard Servo [pdf] Instruction Manual S3001 Standard Servo, S3001, Standard Servo, Servo
---	--

References

- [User Manual](#)