



FX Luminaire MU LED Up Light Owner's Manual

[Home](#) » [FX Luminaire](#) » FX Luminaire MU LED Up Light Owner's Manual 

Contents

- [1 FX Luminaire MU LED Up Light](#)
- [2 MU Up Light](#)
- [3 DIMENSION](#)
- [4 FIELD INSTALLED OPTIONS](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

FXLuminaire®

FX Luminaire MU LED Up Light




The MU is one of the most versatile spotlights on the market and is the perfect choice for the discriminating landscape designer. Using several different filter and accessory options, the designer can control shape, color shifts, and light output. A wide variety of effects can be produced by adding our RecessorRing,® Hex Baffle® or one of our many filters, spread lens or glare control options

MU Up Light

MATERIALS:	Die-cast aluminum A380 housing and shroud with stainless steel hardware. Die-cast zinc/aluminum alloy knuckle
SOCKET:	MR16 GU5.3 socket with retaining clips
WIRING:	18 AWG SPT-1W 105° C 300V
POWER:	Input 10-15VAC/VDC 50/60Hz. Remote transformer required (sold separately)
LAMP OPTIONS:	No Lamp, LED lamp, ZD LED lamp, Halogen

DIMENSION

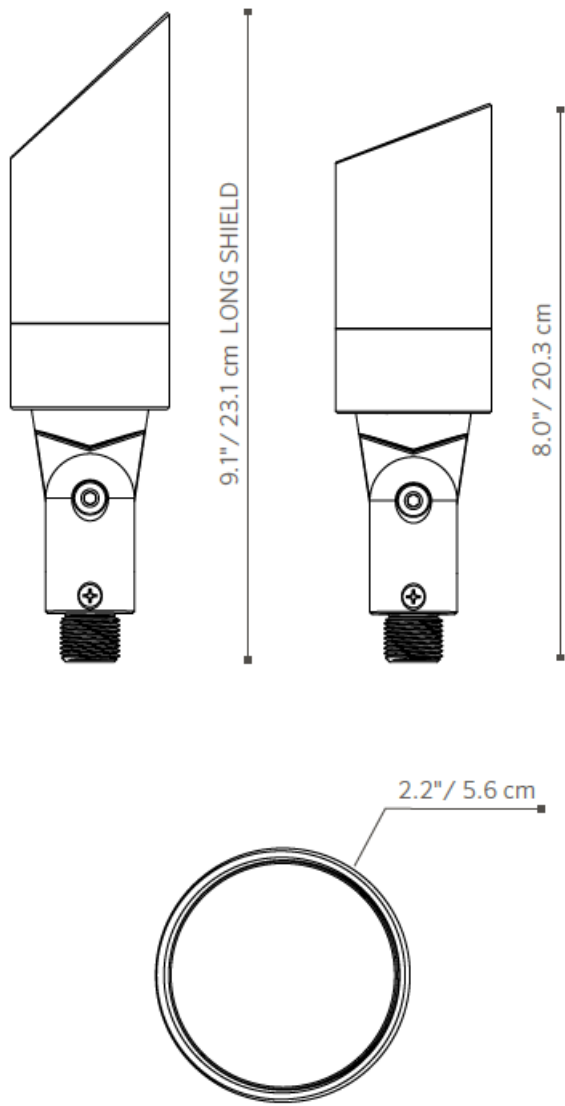

FACTORY INSTALLED OPTIONS: Order 1 + 2 + 3 (optional) + 4





Step	Description	Code
1	FIXTURE	MU
2	LAMP	NL (No lamp), 20 (Halogen BAB), 35 (Halogen FMW), LED20WFL† (LED 4W BAB), LED35WFL† (LED 5W FMW), ZD35WFL† (ZD LED 5W FMW)
3	OPTIONAL SHIELD LS (<i>Long Shield</i>)	
4	FINISH	WG, FW, AL, BZ, DG, WI, SB, FB

EXAMPLE: MU-NL-SB = MU – No Lamp – Sedona Brown Finish
† LED lamps available only with BZ/FB finishes and clear lenses

FIELD INSTALLED OPTIONS

Order Individually

Glare Control
Hex Baffle (250015260000)
RecessorRing (RRMR16)
Lenses/Filters
Frosted (250015170000)
Spread (250013550000)
Solite Spread (250015240000)
Dichroic Peach (250015230000)
Dichroic Blue (250015200000)
Dichroic Green (250015210000)
Dichroic Red (250015220000)
Light Blue (250015190000)

Mounts							
Super Slot Spike (753900) 2" x 10" Included ▼				Coupling: Straight (COUP-XX**) 1.3" x 2.0"			
Long Slot Spike (250015840000) 2.5" x 10"				Coupling: 90° Elbow (ELBW-050-XX**) 1.3" x 2.0"			
SuperJ-Box (SJ-XX**) 2.5" x 12"				Coupling: T-Mount (TMNT-050-XX**) 3.0" x 2.2"			
Post Mount (PM-XX**) 2.5" x 13"				Gutter Mount (GM-SS) 4.0" x 4.0"			
							
Super Slot Spike	Long Slot Spike	Super J-Box XX**	Post Mount XX**	Coupling: Straight	Coupling: 90° Elbow	Coupling: T-Mount	Gutter Mount
Tree Box (TB-XX**) 5.4"x 1.9"				Sign Light Riser (YY-R-SL-XX*) 0.8" diameter w/45° inward curve			
Wall Plate: 1-Gang (WP-1G-050-XX**) 3.4" x 5.1"				Straight Riser (YY-R-XX**) 0.8" diameter			
							
Tree Box	Wall Plates: 1-Gang	Wall Plates: Round		Sign Light Riser	Straight Riser		

The MU includes your choice of halogen MR-16 lamp, clear lens, choice of powder coat finish, and a Super Slot Spike.

Denotes finish code

EXAMPLE: RRMR16 = RecessorRing

PM-SB = Post Mount – Sedona Brown Finish

Learn more Visit: fxl.com

760.744.5240

Documents / Resources



[FX Luminaire MU LED Up Light](#) [pdf] Owner's Manual
MU LED Up Light, MU Spotlights, MU, LED Up Light, MU LED Up Light, Up Light, Light