



FXLuminaire®



DESIGNER



PATH LIGHTS

**MP-K, MP-Z, MP-J,
MP-30/31, MP-40
RP-34/35 FX-259 2.**


Contents [[hide](#)]

1 MP-K Designer Path Lights



2 Documents / Resources

2.1 References

MP-K Designer Path Lights

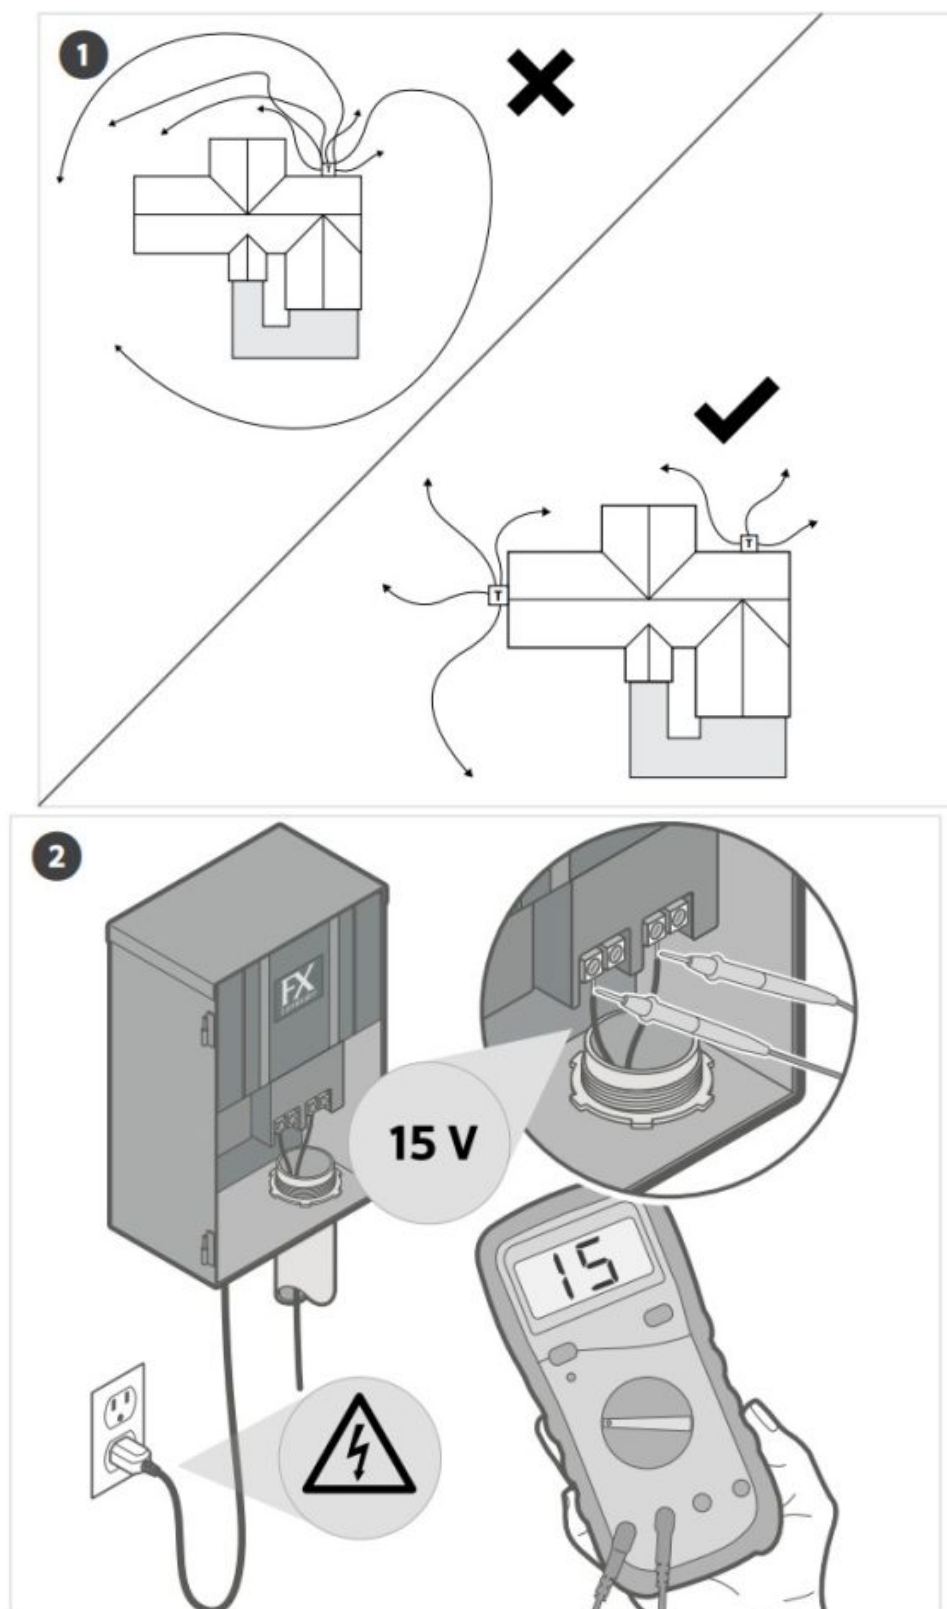


3A

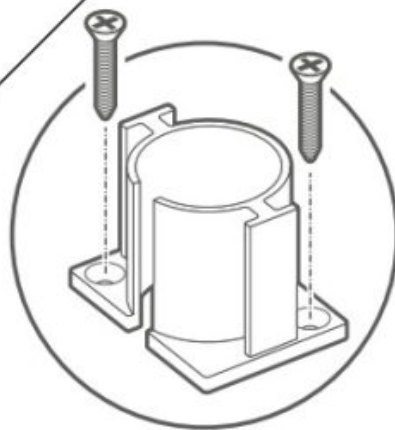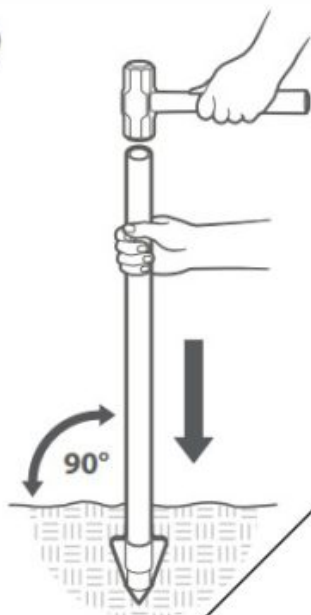


3B

4


11-15V

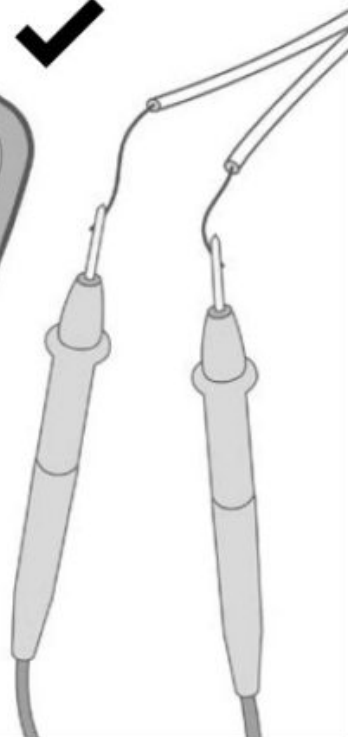


5


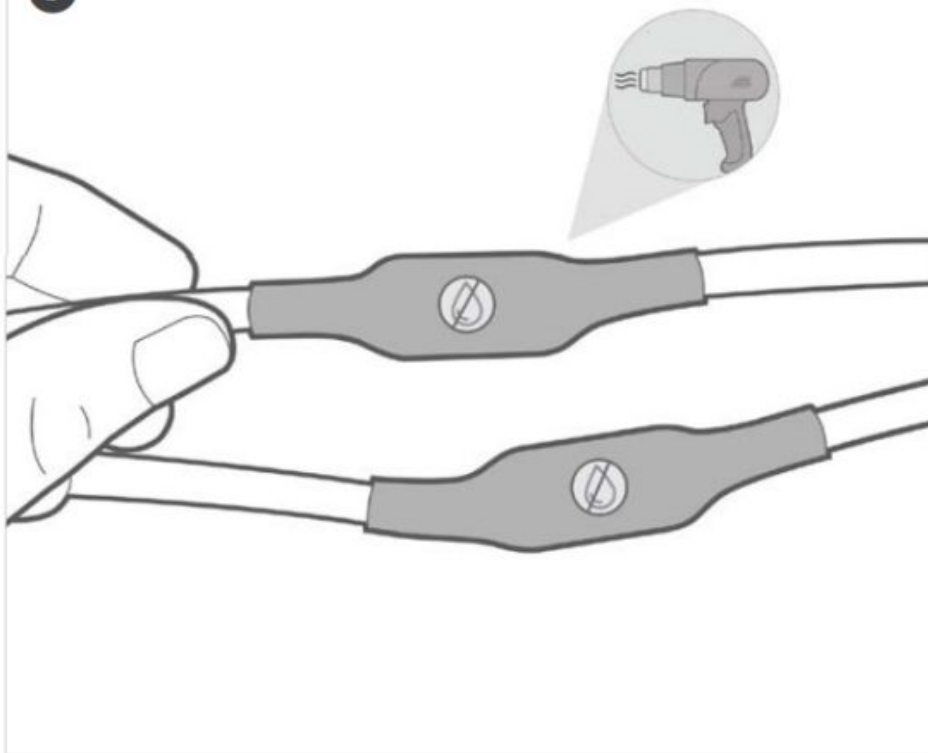


6A

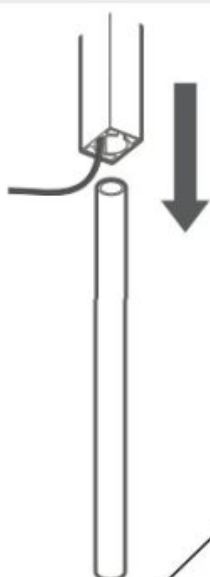



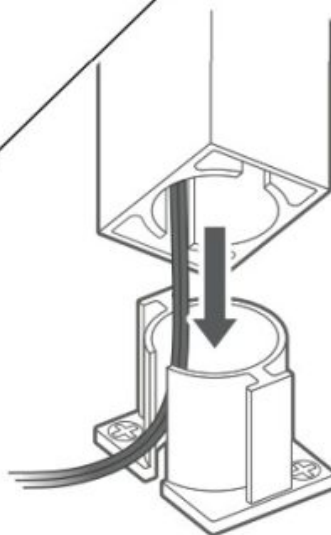

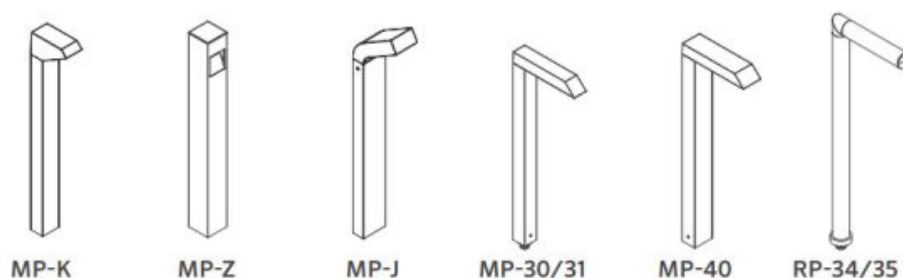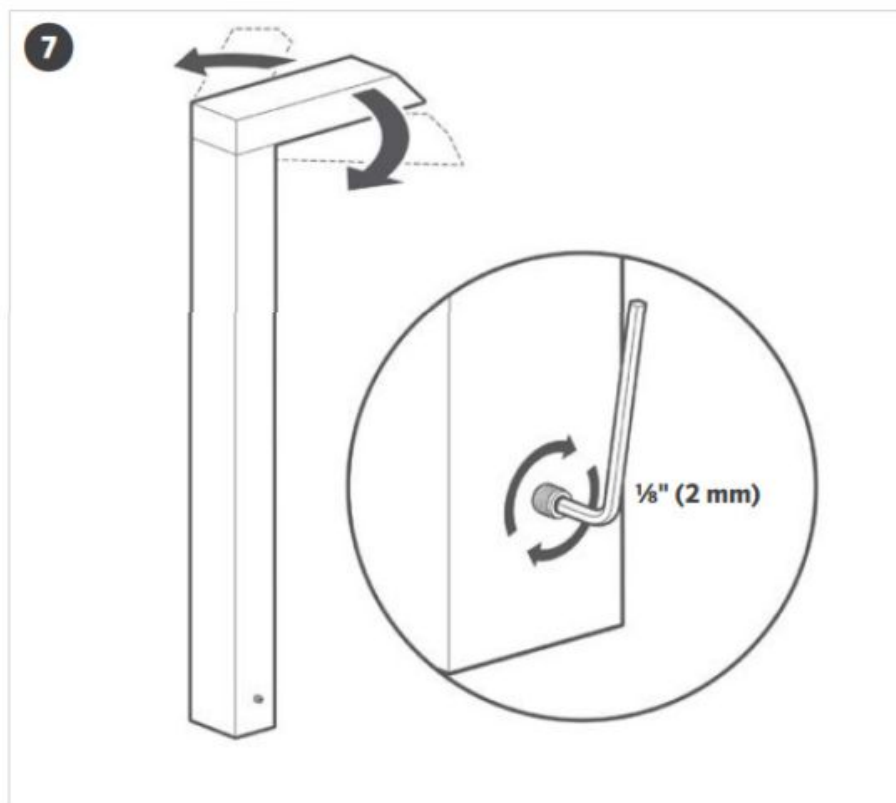6B





LANDSCAPE & ARCHITECTURAL LIGHTING | Learn more. Visit fxl.com

| | | | |
|---|---|--|--|
|  <p>SCAN for help ?</p> |  <p>SCAN for help ?</p> |  |  |
| RP LED board replacement fxl.help/rpledboard | LED board replacement fxl.help/mplboard | Voltage Drop Calculator fxl.com/voltage-drop-calculator | Path Light Spacing Calculator fxl.com/pl-spacing |

Please read and keep all safety and use instructions. If you have questions, contact your local distributor or visit the online support section at fxl.com/support.

WARNING – To reduce the risk of FIRE OR INJURY TO PERSON:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly. Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or enclosure.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the fixture fitting with a missing or damaged shield.


WARNING – Risk of Electric Shock

- May be installed less than 5' (1.5 m) from a pool, spa, or fountain when used with a UL 379 listed transformer.
- A fixture shall not use tungsten halogen lamps unless the fixture is marked for such lamps.
- Supply connection and electrical components are located above ground level, except for secondary cord that is suitable for wet locations.

LOW-VOLTAGE CABLE SHALL:

- Be protected by routing in close proximity to the fixture or fitting or next to a building structure, such as a house or deck.
- Not be buried except for a maximum 6" (152 mm) in order to connect to the main low-voltage cable.
- Have the length cut off so that it is connected to a connector within 6" (152 mm) from a building structure, a fixture, or fitting.

FXLuminaire®

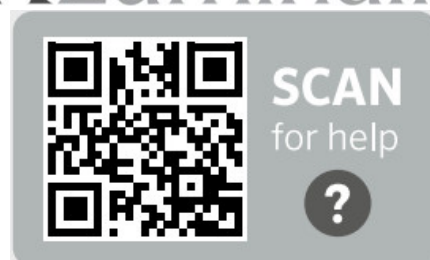

fxl.com/support


These products contain a light source of energy efficiency class G.



Documents / Resources

| | |
|---|--|
|  | FXLuminaire MP-K Designer Path Lights [pdf] Instruction Manual MP-K, MP-K Designer Path Lights, Designer Path Lights, Path Lights, Lights |
|---|--|

References

-  [FX Luminaire | Landscape & Architectural Lighting](#)
- [User Manual](#)

🔍 Designer Path Lights, FXLuminaire, Lights, MP-K, MP-K Designer Path Lights, Path
📁 FXLuminaire Lights

—Previous Post

[FXLuminaire SRP-20-RGBW Strip Light Owner’s Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.