



GASING Two Handle Basin Mixer Instruction Manual

[Home](#) » [GASING](#) » GASING Two Handle Basin Mixer Instruction Manual 

GASING Two Handle Basin Mixer Instruction Manual



Contents


- [1 Application Instruction](#)
- [2 Installation Condition](#)
- [3 Standard Part List](#)
- [4 Installation Step](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Application Instruction


1. Gradually pull the handle, it will be more advantageous to protect the cartridge

hot

cold



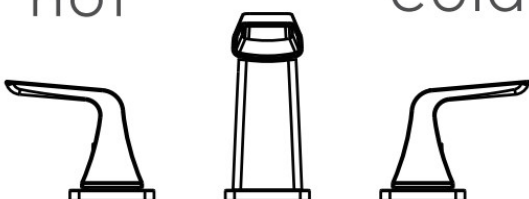


2. Contrarotate the left handle i for hot water the greater angle you open, the larger flowrate you get. Conversely the smaller angle you open, the little flowrate you get fill turn off. Clockwise rotation the right handle is for cold water, the greater angle you open, the larger flowrate close close you get. Conversely the smaller angle you open, the little flowrate you get till turn off.

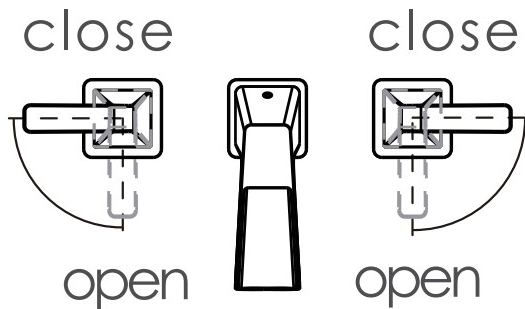

Installation Condition


Notice: In order to have the flow, please turn both handles to 30 degree angle slowly so that the air inside the tubes can be clean when you use this product at the 1st time.

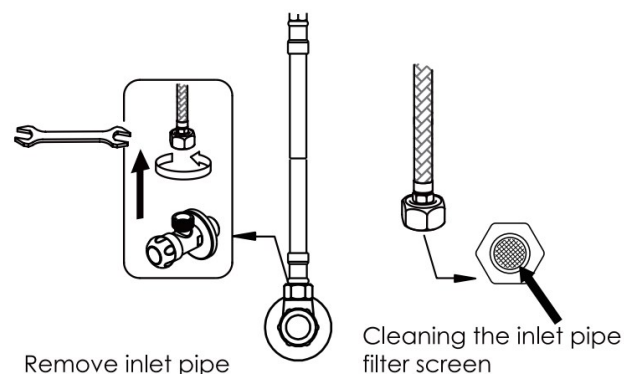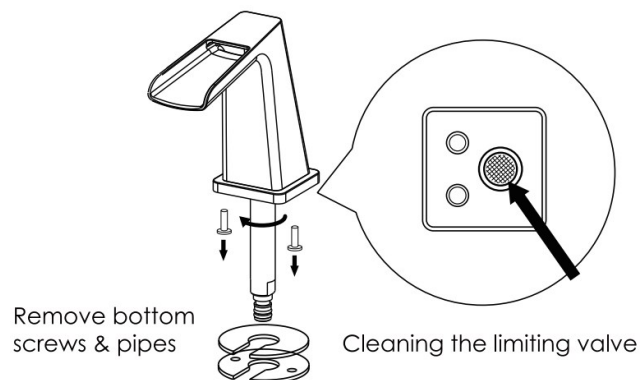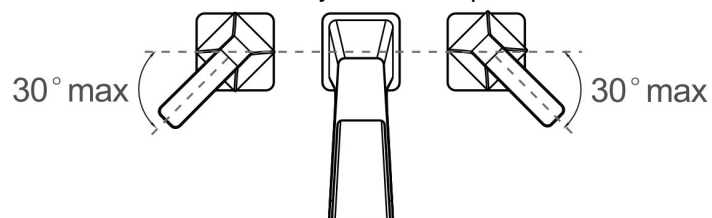

Cleaning and maintenance

Waterfall type: if the water flow weakens slightly after long-term use, the throttle valve of the faucet and the filter screen of the inlet pipe can be cleaned to change this phenomenon. (the filter screen of the water inlet pipe can filter large particle impurities in the water)

Standard Part List


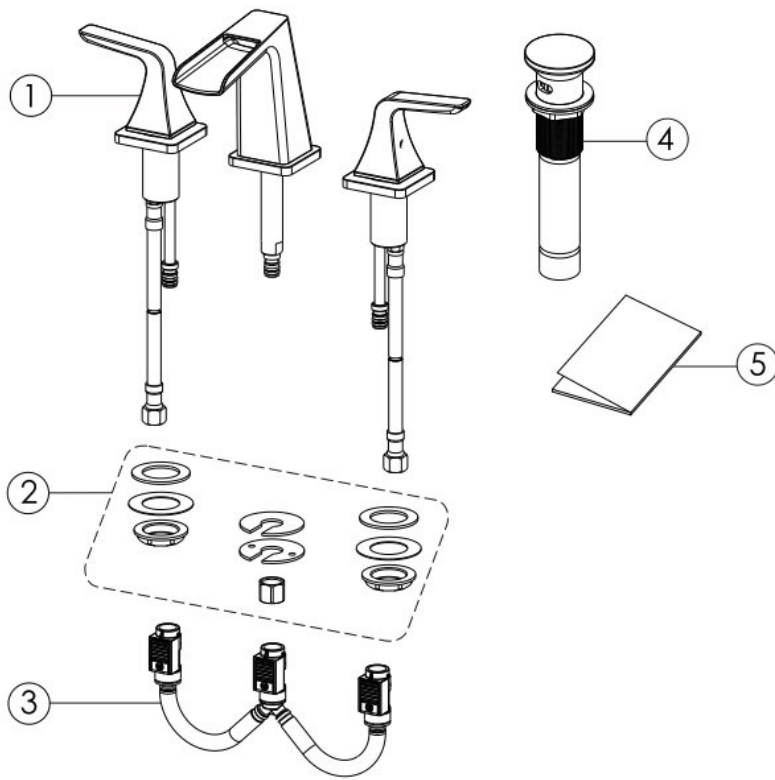


NO.	Part Name	Quality
1	Body Assy	1
2	Fitting Assy	1
3	Hose	1
4	Pop-up	1
5	Instruction	1


- To insure proper installation, please read the following instructions carefully.
- Please make sure that the water supply has been shut off at the stop valve.

Installation Step


1. Please confirm The three holes on The basin are Through holes 'as shown from The instructions before install.
Fist remove the fixing sets from the fixed group,and then put the body Through the hole on the basin assemble ail fixing sets to the body.

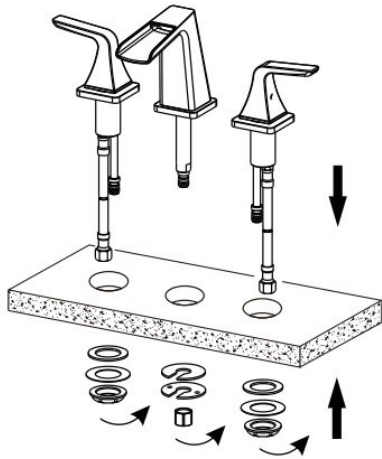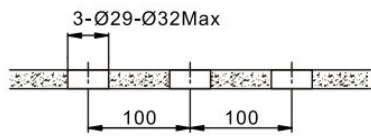


2. Use hand to screw up the lock nut, then use install tool for fixing strengthen. And then connect the outlet hose as shown.

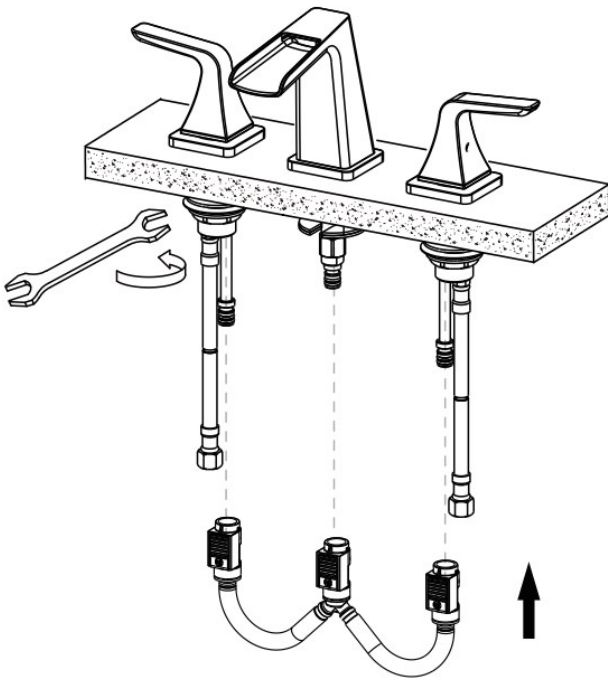

3. Connect the inlet hose as shown, Take Note of the 'Red' & 'Blue' index from the handle, Red' for connecting To the valve for supply hot water, and "Blue" for connecting To the valve for supply cold water.

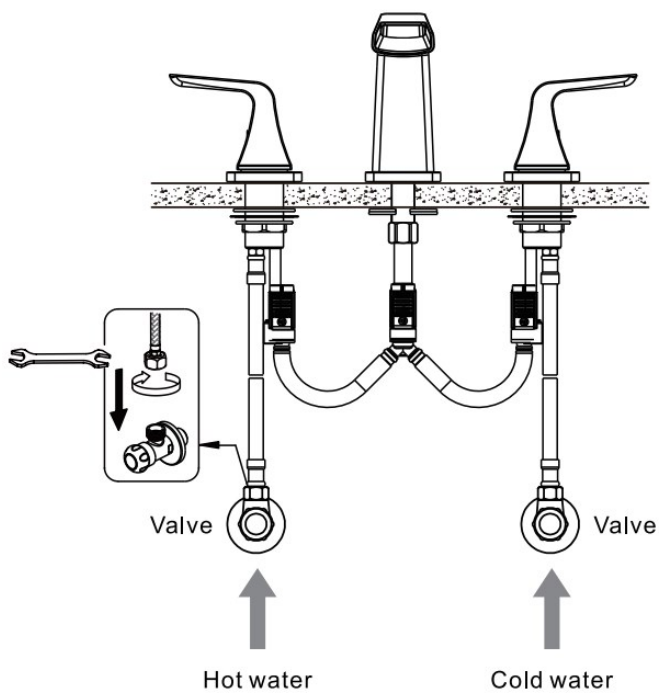

4. Install the pop-up.

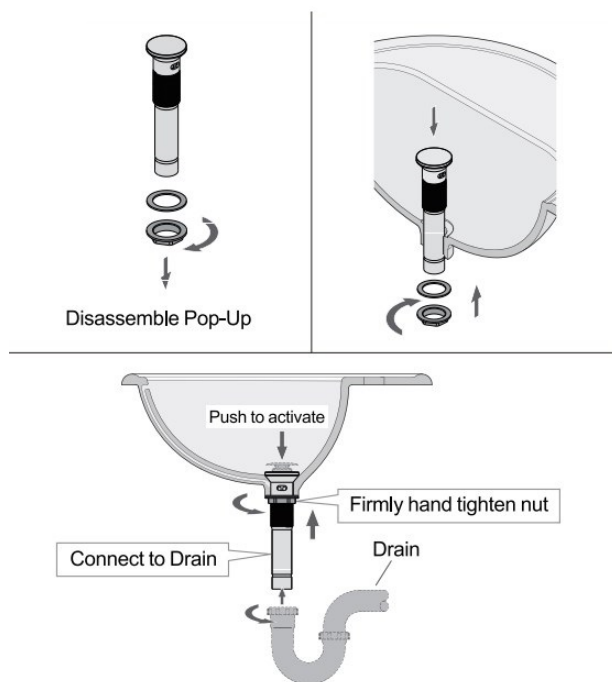

Website: www.casainc.com
 Contact Phone Number: 888-257-3857
 Service Contact : service@casainc.com



Documents / Resources



[GASING Two Handle Basin Mixer](#) [pdf] Instruction Manual
Two Handle Basin Mixer, Two, Handle Basin Mixer, Basin Mixer, Mixer

Manuals+.