



Gibson KG7T Two Stage Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces User Manual

[Home](#) » [Gibson](#) » Gibson KG7T Two Stage Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces User Manual 

Contents

- [1 Gibson KG7T Two Stage Fixed Speed High-Efficiency Upflow Horizontal and Downflow Gas Furnaces](#)
- [2 TECHNICAL SPECIFICATIONS](#)
- [3 FEATURES and BENEFITS](#)
- [4 GAS FURNACE COMPONENTS](#)
- [5 DIMENSIONS](#)
- [6 BLOWER PERFORMANCE – KG7TA/TK](#)
- [7 MODEL IDENTIFICATION CODE](#)
- [8 SPECIFICATIONS](#)
- [9 ACCESSORIES](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

Gibson®

Gibson KG7T Two Stage Fixed Speed High-Efficiency Upflow Horizontal and Downflow Gas Furnaces



TECHNICAL SPECIFICATIONS

KG7T (A and K Series) Two-Stage, Fixed Speed

- High Efficiency Upflow/Horizontal and Downflow Gas Furnaces
- **Induced Draft** – 80+ AFUE
- **Input** 60,000 – 140,000 Btuh
- The high-efficiency gas furnace may be installed free-standing in a utility room, or basement, or enclosed in an alcove or closet.
- The rounded corner jacket provides a pleasing “appliance appearance.” Design certified by CSA for application in the United States and Canada.


FEATURES and BENEFITS

- 100% fired and tested: All units and each component are tested on the manufacturing line.
- Best packaging in the industry: Unique corner post design assures the product will arrive at the homeowner dent-free.
- Low Boy Height: Easy to apply in low ceiling applications, works well with taller high SEER coils, easier to handle and install.
- Tubular primary heat exchanger: Heavy gauge aluminized steel heat exchanger assures a long life.
- 30-second blower delay at start-up: Assures a warm duct temperature at furnace start-up. Adjustable blower-off settings (60, 90, 120, and 180 seconds).
- 30-second post purge: Increases the life of the heat exchanger.
- Hot surface ignitor: Innovative application of an appliance-type ignitor with a 20-year history of reliability. Utilizes proven Smartlite® technology.
- Color-coded wire harness: Designed to fit the components, all with quick-connect fittings for ease of service and replacement.
- High static blowers: All models are equipped with high static blowers.
- 90-second cooling cycle blower-off delay (TDR): increases cooling performance when matched with a Nortek Global HVAC coil.
- Flexible category I venting system: This may be vented with the dedicated venting system or commonly vented


with other category one appliances.

- Variable speed blower kit: Upgradable to full variable speed with the kit.
- LP convertible: Simple burner orifice and regulator spring change for ease of convertibility.
- Diagnostic lights for easy troubleshooting without counting flashes: Dedicated light for flame signal strength and 2 lights in combination to indicate all other fault codes with easy to recognize states without counting flashes.
- Integrated control board: Incorporates connections for electronic air cleaner and humidifier.
- Two-piece door design: Enhances furnace appearance and uses captured screws to prevent losing door screws.
- Energy Efficient Brushless DC (ECM) Motor: Gives up to 1 SEER point efficiency gain in cooling.
- Furnace Air Leakage: These furnaces comply with the Energy Star cabinet air leakage requirement of less than or equal to 2%. Keep the conditioned air flowing to where it's needed.

GAS FURNACE COMPONENTS

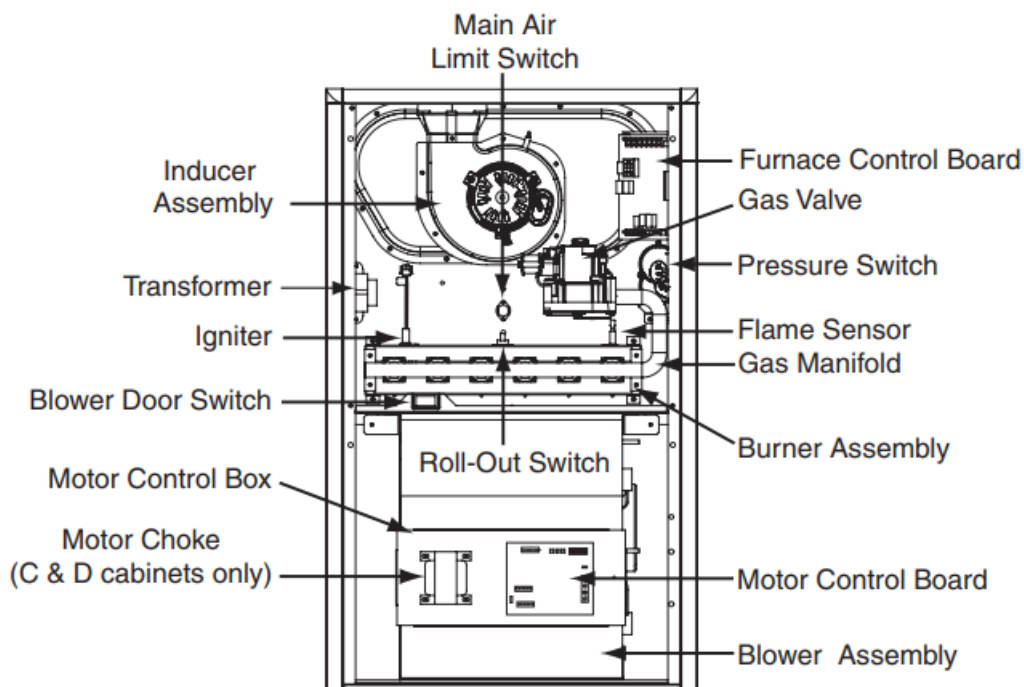






Upflow/Horizontal Gas Furnace

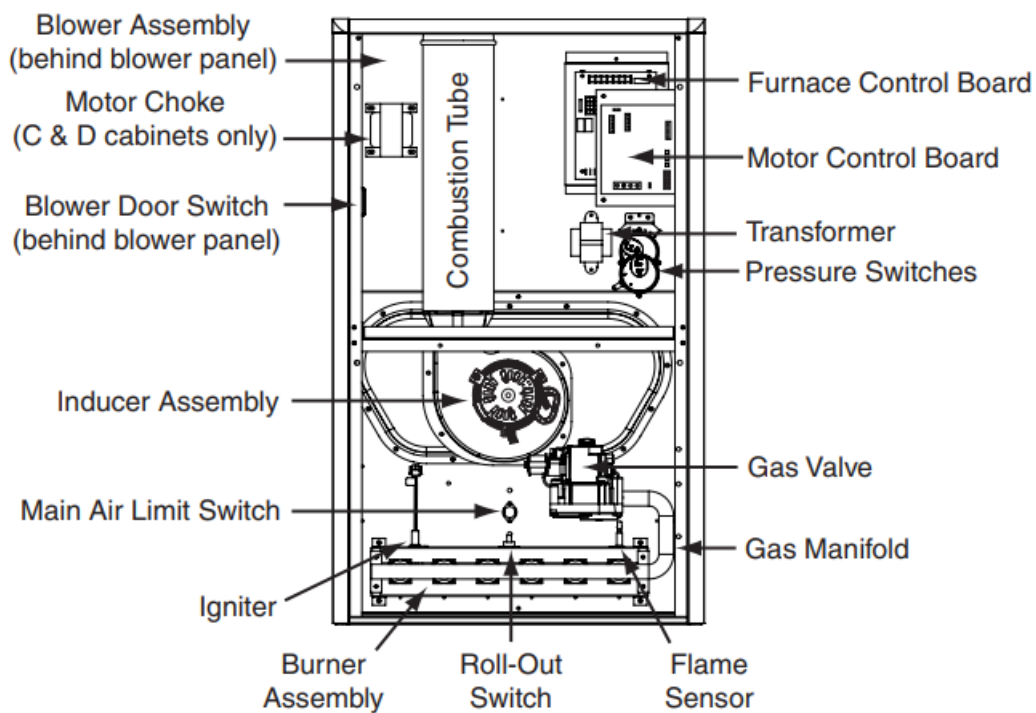

Downflow Gas Furnace


DIMENSIONS

*TA Model #'s	Dimension "A"	Dimension "B"	Dimension "C"	Dimension "D"
060-23A1	14 1/4	10 3/4	12 5/8	12 7/8
080-24B1	17 1/2	11 3/4	15 7/8	16 1/8
100-24B1				
100-35C1	21	14	19 3/8	19 5/8
120-35C1				
140-45D1	24 1/2	15 1/4	22 7/8	23 1/8

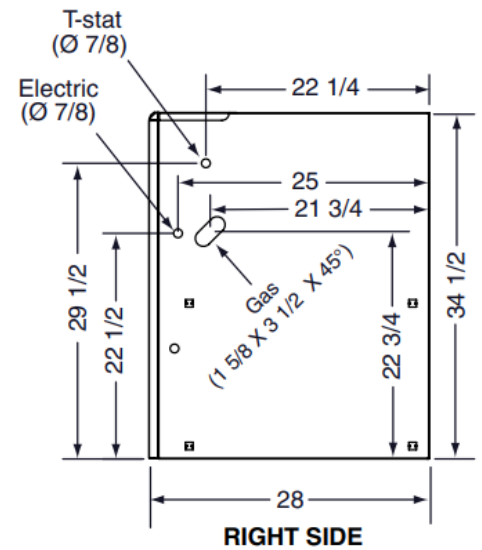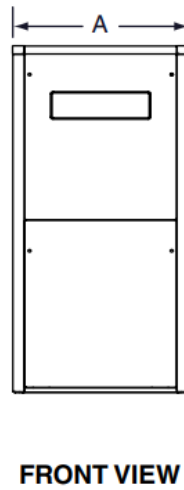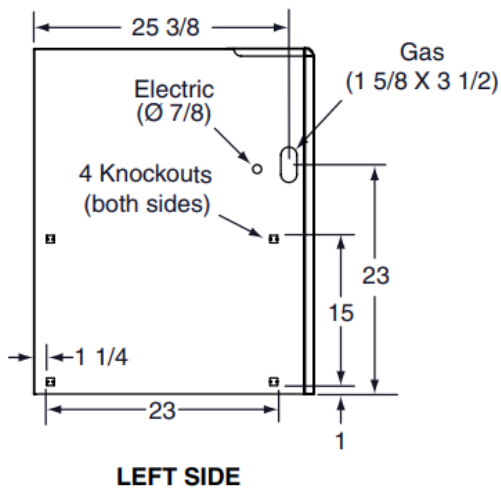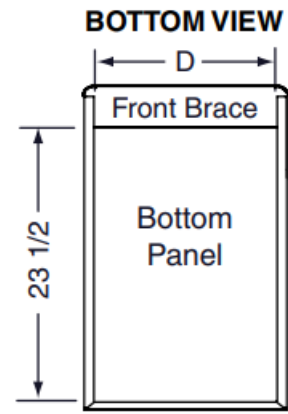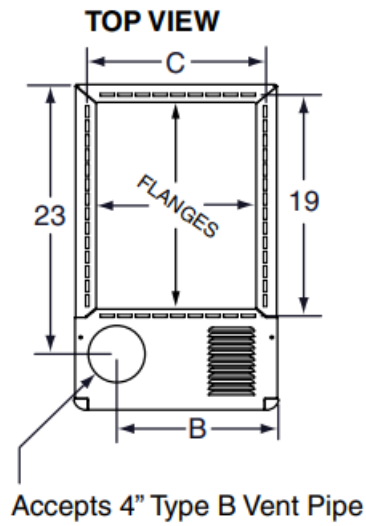

KG7TA 80+ High-Efficiency Upflow/Horizontal Series

*TK Model #'s	Dimension "A"	Dimension "B"	Dimension "C"	Dimension "D"
060-23A1	14 1/4	10 3/4	12 5/8	12 7/8
080-24B1	17 1/2	11 3/4	15 7/8	16 1/8
100-24B1				
100-35C1	21	14	19 3/8	19 5/8
120-35C1				
140-45D1	24 1/2	15 1/4	22 7/8	23 1/8

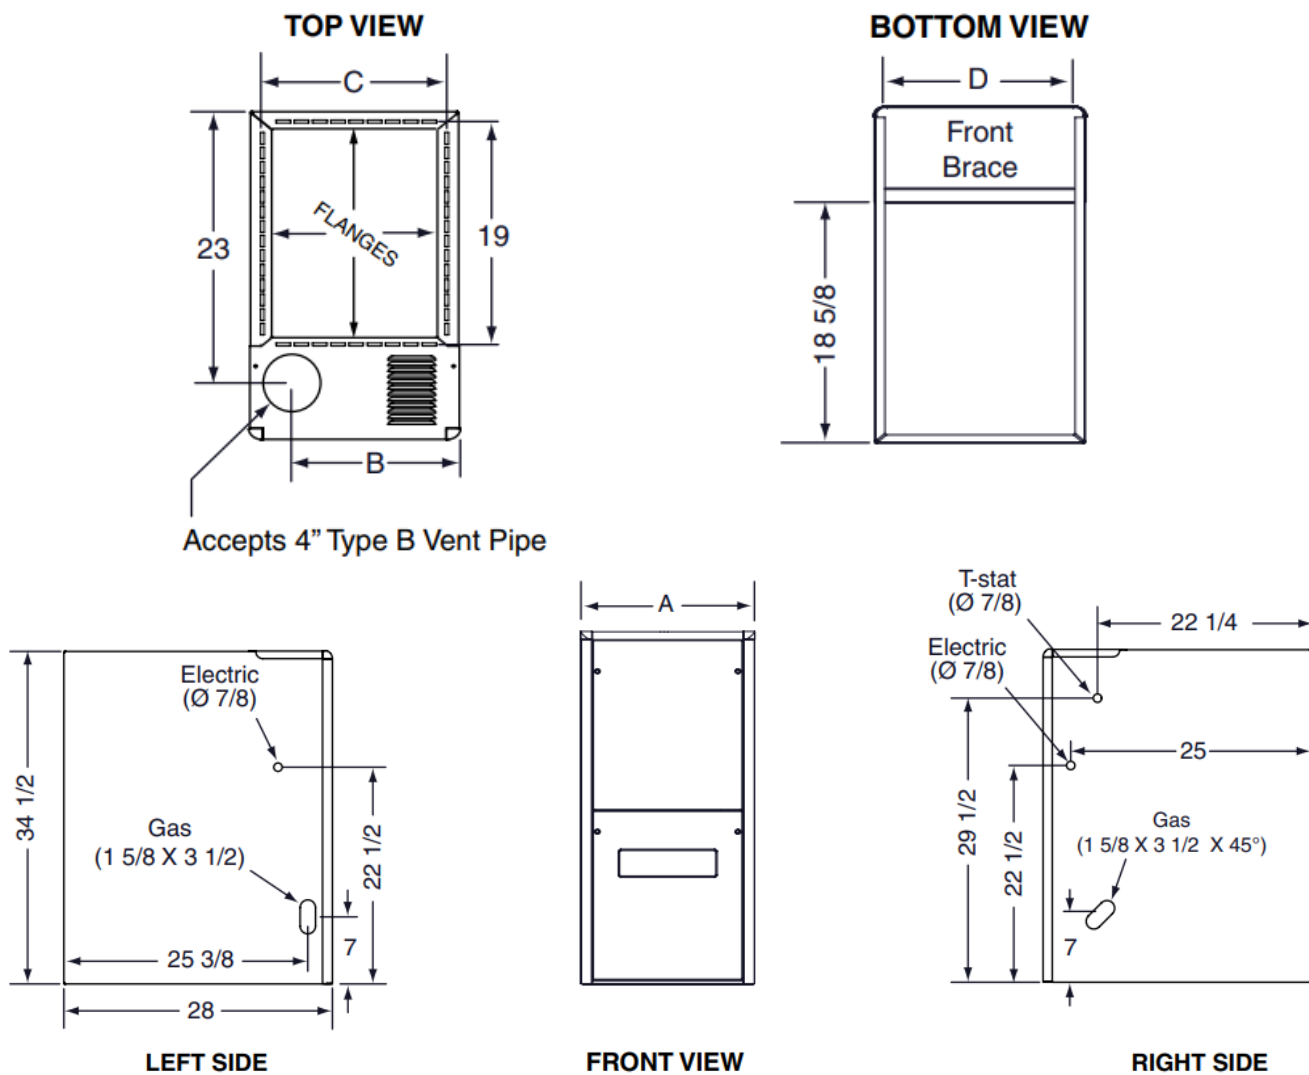

KG7TK 80+ High Efficiency Downflow Series

BLOWER PERFORMANCE – KG7TA/TK

G7TA/TK – 80% AFUE, Two Stage Gas Furnace																					
Model Number	Heating Input (Btu/h)	Motor Switch Setting				External Static Pressure (in.w.c.)															
						0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8	
		1 / 5	2 / 6	3 / 7	4 / 8	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se
		0	0	0	0																
		1	0	0	0																
		0	1	0	0	600	–	555	–	510											
		1	1	0	0	705	–	670	–	635	–	600	–								
		0	0	1	0	775	57	740	60	705	–	665	–								

*TA/TK-060 (C)-*A1	600 00	1	0	1	0	90 0	49	87 0	5 1	83 5	5 3	80 0	5 6	76 5	58	73 0	6 1	69 5	6 4	66 0	67
		0	1	1	0	95 0	47	92 0	4 8	89 0	5 0	85 5	5 2	82 5	54	79 5	5 6	76 5	5 8	73 0	61
		1	1	1	0	10 00	44	97 0	4 6	94 0	4 7	91 0	4 9	88 0	51	85 0	5 2	82 0	5 4	79 0	56
		0	0	0	1	10 75	41	10 45	4 3	10 15	4 4	98 5	4 5	96 0	46	92 5	4 8	90 0	4 9	87 0	51
		1	0	0	1	11 10	40	10 80	4 1	10 55	4 2	10 25	4 3	10 00	44	97 5	4 6	94 5	4 7	92 0	48
		0	1	0	1	11 70	38	11 40	3 9	11 15	4 0	10 90	4 1	10 60	42	10 35	4 3	10 10	4 4	98 5	45
		1	1	0	1	12 10	37	11 85	3 8	11 60	3 8	11 30	3 9	11 05	40	10 80	4 1	10 55	4 2	10 25	43
		0	0	1	1	15 20	29	12 25	3 6	12 00	3 7	11 75	3 8	11 50	39	11 20	4 0	10 95	4 1	10 70	42
		1	0	1	1	13 05	34	12 80	3 5	12 55	3 5	12 30	3 6	12 05	37	11 80	3 8	11 55	3 8	11 30	39
		0	1	1	1	13 50	33	12 30	3 6	13 05	3 4	12 85	3 5	12 60	35	12 40	3 6	12 15	3 7	11 95	37
		1	1	1	1	14 40	31	14 00	3 2	13 65	3 3	12 30	3 6	12 95	36	12 55	3 5	12 20	3 6	11 85	38
*TA/TK-080 (C)-*B1	800 00	0	0	0	0																
		1	0	0	0																
		0	1	0	0																
		1	1	0	0	72 5	–														
		0	0	1	0	81 0	–														
		1	0	1	0	94 0	–	89 0	–	84 5	–	79 5	–	75 0	–	70 0	–				
		0	1	1	0	99 0	60	94 5	–	90 5	–	86 0	–	82 0	–	77 5	–	73 5	–	69 0	–
		1	1	1	0	10 55	56	10 15	5 8	97 0	–	93 0	–	89 0	–	84 5	–	80 5	–	76 0	–
		0	0	0	1	11 35	52	10 95	5 4	10 55	5 6	10 10	5 9	96 0	–	93 0	–	89 0	–	85 0	–
		1	0	0	1	11 85	50	11 45	5 2	11 05	5 4	10 65	5 6	10 30	58	99 0	6 0	95 0	–	91 0	–
		0	1	0	1	12 50	47	12 10	4 9	11 70	5 1	11 35	5 2	10 95	54	10 55	5 6	10 20	5 8	98 0	60

		1	1	0	1	12 90	46	12 55	4 7	12 20	4 9	11 80	5 0	11 45	52	11 10	5 3	10 75	5 5	10 40	57
		0	0	1	1	13 15	45	12 75	4 6	12 40	4 8	12 00	4 9	11 60	51	11 20	5 3	10 85	5 5	10 45	57
		1	0	1	1	13 50	44	13 15	4 5	12 80	4 6	12 45	4 8	12 05	49	11 70	5 1	11 35	5 2	11 00	54
		0	1	1	1	13 90	43	13 50	4 4	13 15	4 5	12 75	4 6	12 40	48	12 00	4 9	11 60	5 1	11 25	53
		1	1	1	1	14 20	42	13 80	4 3	13 45	4 4	13 10	4 5	12 70	47	12 35	4 8	12 00	4 9	11 60	51

Notes:

1. Motor Switch Settings are for heating speeds using HEAT switches 1, 2, 3, & 4 and cooling speeds using COOL switches 5, 6, 7, & 8.
2. Two openings are required for airflows above 1600 CFM if the filter(s) is (are) adjacent to the furnace.
3. Data is shown without the filter.
4. Temperature rises in the table are approximate. Actual temperature rises may vary.
5. Temperature rises that are shaded in grey are not recommended.

G7TA/TK – 80% AFUE, Two Stage Gas Furnace																					
Model Number	Heat ing Input (Btu h)	Motor Switch Setting				External Static Pressure (in.w.c.)															
						0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8	
		1 / 5	2 / 6	3 / 7	4 / 8	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se	C F M	Ri se
		0	0	0	0	905	–	890	–	805	–	780	–								
		1	0	0	0	980	–	930	–	900	–	835	–	820	–	800	–	715	–	670	–
		0	1	0	0	1095	–	1015	–	980	–	915	–	895	–	870	–	810	–	765	–
		1	1	0	0	1160	64	1100	–	1065	–	1035	–	995	–	940	–	895	–	865	–
		0	0	1	0	1230	60	1195	62	1170	–	1110	–	1075	–	1060	–	995	–	970	–
		1	0	1	0	1315	56	1275	58	1240	60	1195	62	1160	64	1140	65	1115	–	1075	–
		0	1	1	0	1345	55	1310	57	1280	58	1250	59	1220	61	1190	62	1140	65	1115	–

TA100(C)- B1	1000 00	1	1	1	0	14 45	5 1	13 90	5 3	13 50	5 5	13 15	5 6	12 80	5 8	12 50	5 9	12 30	6 0	11 85	63
		0	0	0	1	14 90	5 0	14 30	5 2	14 20	5 2	13 80	5 4	13 40	5 5	13 10	5 7	12 80	5 8	12 75	58
		1	0	0	1	15 50	4 8	15 10	4 9	14 75	5 0	14 50	5 1	14 20	5 2	13 75	5 4	13 40	5 5	13 25	56
		0	1	0	1	16 00	4 6	12 70	5 8	15 40	4 8	15 00	4 9	14 75	5 0	14 45	5 1	14 25	5 2	13 85	53
		1	1	0	1	16 40	4 5	16 05	4 6	15 70	4 7	15 50	4 8	15 25	4 9	14 90	5 0	14 60	5 1	14 30	52
		0	0	1	1	16 90	4 4	16 65	4 4	16 30	4 5	16 00	4 6	15 70	4 7	15 50	4 8	15 15	4 9	14 90	50
		1	0	1	1	17 55	4 2	17 30	4 3	16 80	4 4	16 60	4 5	16 40	4 5	16 10	4 6	15 75	4 7	15 50	48
		0	1	1	1	18 05	4 1	17 70	4 2	17 40	4 3	17 15	4 3	16 90	4 4	16 55	4 5	16 45	4 5	16 05	46
		1	1	1	1	18 60	4 0	18 25	4 1	17 90	4 1	17 65	4 2	17 45	4 2	17 10	4 3	16 95	4 4	16 60	45
TA/TK-100(C)-*C1	100 000	0	0	0	0	11 25	6 6	10 40	—	96 0	—										
		1	0	0	0	12 05	6 1	11 20	—	10 40	—	96 0	—								
		0	1	0	0	13 05	5 7	12 25	6 0	11 50	6 4	10 70	—	99 5	—	91 5	—				
		1	1	0	0	14 30	5 2	13 50	5 5	12 70	5 8	11 90	6 2	11 10	—	10 30	—	95 0	—	86 5	—
		0	0	1	0	15 25	4 9	14 50	5 1	13 75	5 4	13 00	5 7	12 25	6 0	11 50	6 4	10 75	—	10 00	—
		1	0	1	0	16 20	4 6	15 40	4 8	14 65	5 1	13 90	5 3	13 15	5 6	12 40	6 0	11 65	6 4	10 90	—
		0	1	1	0	16 95	4 4	16 20	4 6	15 45	4 8	14 65	5 1	13 90	5 3	13 15	5 6	12 35	6 0	11 60	64
		1	1	1	0	17 70	4 2	17 00	4 4	16 30	4 5	15 55	4 8	14 85	5 0	14 10	5 3	13 40	5 5	12 65	59
		0	0	0	1	18 75	4 0	18 05	4 1	17 30	4 3	16 55	4 5	15 80	4 7	15 10	4 9	14 35	5 2	13 40	55
		1	0	0	1	19 05	3 9	18 40	4 0	17 75	4 2	17 10	4 3	16 40	4 5	15 75	4 7	15 10	4 9	14 45	51
		0	1	0	1	19 80	3 7	19 10	3 9	18 45	4 0	17 80	4 2	17 15	4 3	16 50	4 5	15 80	4 7	15 15	49
		1	1	0	1	20 25	3 7	19 60	3 8	18 95	3 9	18 30	4 0	17 65	4 2	17 00	4 4	16 35	4 5	15 70	47

		0	0	1	1	20 85	3 6	20 25	3 7	19 60	3 8	19 00	3 9	18 40	4 0	17 75	4 2	17 15	4 3	16 55	45
		1	0	1	1	21 35	3 5	20 70	3 6	20 10	3 7	19 45	3 8	18 80	3 9	18 15	4 1	17 50	4 2	16 85	44
		0	1	1	1	22 00	3 4	21 45	3 5	20 90	3 5	20 35	3 6	19 80	3 7	19 25	3 8	18 70	4 0	18 20	41
		1	1	1	1	22 80	3 2	22 25	2 7	21 70	3 4	21 15	3 5	20 65	2 2	20 10	3 7	19 55	3 8	19 00	39

Notes:

1. Motor Switch Settings are for heating speeds using HEAT switches 1, 2, 3, & 4 and cooling speeds using COOL switches 5, 6, 7, & 8.
2. Two openings are required for airflows above 1600 CFM if the filter(s) is (are) adjacent to the furnace.
3. Data is shown without a filter.
4. Temperature rises in the table are approximate. Actual temperature rises may vary.
5. temperature rises that are shaded in grey are not recommended.

G7TA/TK – 80% AFUE, Two Stage Gas Furnace																					
Model Number	Heat Input (Btu/h)	Motor Switch Setting				External Static Pressure (in.w.c.)															
						0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8	
		1 5	2 6	3 7	4 8	C F M	R i s e	C F M	R i s e	C F M	R i s e	C F M	R i s e	C F M	R i s e	C F M	R i s e	C F M	R i s e	C F M	R i s e
*TA/TK-120(C)-*C1	1200 00	0	0	0	0	11 25	–	10 40													
		1	0	0	0	12 05	–	11 20	–	10 40	–										
		0	1	0	0	13 05	–	12 25	–	11 50	–	10 70	–								
		1	1	0	0	14 30	6 2	13 50	–	12 70	–	11 90	–	11 10	–	10 30	–				
		0	0	1	0	15 25	5 8	14 50	6 1	13 75	6 5	13 00	–	12 25	–	11 50	–	10 75	–	10 00	–
		1	0	1	0	16 20	5 5	15 40	5 8	14 65	6 1	13 90	6 4	13 15	–	12 40	–	11 65	–	10 90	–
		0	1	1	0	16 95	5 2	16 20	5 5	15 45	5 8	14 65	6 1	13 90	6 4	13 15	–	12 35	–	11 60	–
		1	1	1	0	17 70	5 0	17 00	5 2	16 30	5 5	15 55	5 7	14 85	6 0	14 10	6 3	13 40	6 6	12 65	–
		0	0	0	1	18 75	4 7	18 05	4 9	17 30	5 1	16 55	5 4	15 80	5 6	15 10	5 9	14 35	6 2	13 40	66


		1	0	0	1	19 05	4 7	18 40	4 8	17 75	5 0	17 10	5 2	16 40	5 4	15 75	5 6	15 10	5 9	14 45	62
		0	1	0	1	19 80	4 5	19 10	4 7	18 45	4 8	17 80	5 0	17 15	5 2	16 50	5 4	15 80	5 6	15 15	59
		1	1	0	1	20 25	4 4	19 60	4 5	18 95	4 7	18 30	4 9	17 65	5 0	17 00	5 2	16 35	5 4	15 70	57
		0	0	1	1	20 85	4 3	20 25	4 4	19 60	4 5	19 00	4 7	18 40	4 8	17 75	5 0	17 15	5 2	16 55	54
		1	0	1	1	21 35	4 2	20 70	4 3	20 10	4 4	19 45	4 6	18 80	4 7	18 15	4 9	17 50	5 1	16 85	53
		0	1	1	1	22 00	4 0	21 45	4 1	20 90	4 3	20 35	4 4	19 80	4 5	19 25	4 6	18 70	4 8	18 20	49
		1	1	1	1	22 80	3 9	22 25	4 0	21 70	4 1	21 15	4 2	20 65	4 3	20 10	4 4	19 55	4 5	19 00	47
*TA/TK-140(C)-*D1	1400 00	0	0	0	0	13 95	—	13 50	—	13 05	—	12 60	—	12 10	—	11 65	—				
		1	0	0	0	14 65	—	14 20	—	13 75	—	13 30	—	12 90	—	12 45	—	12 00	—		
		0	1	0	0	15 55	6 7	15 10	6 9	14 70	—	14 25	—	13 80	—	13 40	—	12 95	—	12 50	—
		1	1	0	0	16 25	6 4	15 85	6 5	15 40	6 7	15 00	6 9	14 60	—	14 15	—	13 75	—	13 35	—
		0	0	1	0	16 90	6 1	16 50	6 3	16 10	6 4	15 70	6 6	15 30	6 8	14 85	7 0	14 45	—	14 05	—
		1	0	1	0	17 60	5 9	17 15	6 0	16 70	6 2	16 25	6 4	15 75	6 6	15 30	6 8	14 85	7 0	14 40	—
		0	1	1	0	18 35	5 7	17 90	5 8	17 45	5 9	16 95	6 1	16 50	6 3	16 05	6 5	15 55	6 7	15 10	69
		1	1	1	0	18 85	5 5	18 40	5 6	17 90	5 8	17 45	5 9	17 00	6 1	16 55	6 3	16 10	6 4	15 65	66
		0	0	0	1	19 45	5 3	19 00	5 5	18 50	5 6	18 05	5 7	17 60	5 9	17 10	6 1	16 65	6 2	16 20	64
		1	0	0	1	19 50	5 3	19 05	5 4	18 60	5 6	18 20	5 7	17 75	5 8	17 35	6 0	16 90	6 1	16 50	63
		0	1	0	1	20 75	5 0	20 30	5 1	19 90	5 2	19 45	5 3	19 00	5 5	18 55	5 6	18 10	5 7	17 70	59
		1	1	0	1	21 25	4 9	20 85	5 0	20 40	5 1	20 00	5 2	19 55	5 3	19 10	5 4	18 70	5 5	18 25	57
		0	0	1	1	21 70	4 8	21 30	4 9	20 90	5 0	20 45	5 1	20 05	5 2	19 65	5 3	19 25	5 4	18 80	55
		1	0	1	1	22 15	4 7	21 80	4 8	21 40	4 8	21 05	4 9	20 70	5 0	20 35	5 1	20 00	5 2	19 65	53

		0	1	1	1									22	4	21	4	21	4	20	
														25	7	65	8	00	9	40	51
		1	1	1	1											21	4	21	4	20	
																70	8	20	9	65	50

Notes:

1. Motor Switch Settings are for heating speeds using HEAT switches 1, 2, 3, & 4 and cooling speeds using COOL switches 5, 6, 7, & 8.
2. Two openings are required for airflows above 1600 CFM if the filter(s) is (are) adjacent to the furnace.
3. Data is shown without the filter.
4. Temperature rises in the table are approximate. Actual temperature rises may vary.
5. Temperature rises that are shaded in grey are not recommended.

MODEL IDENTIFICATION CODE

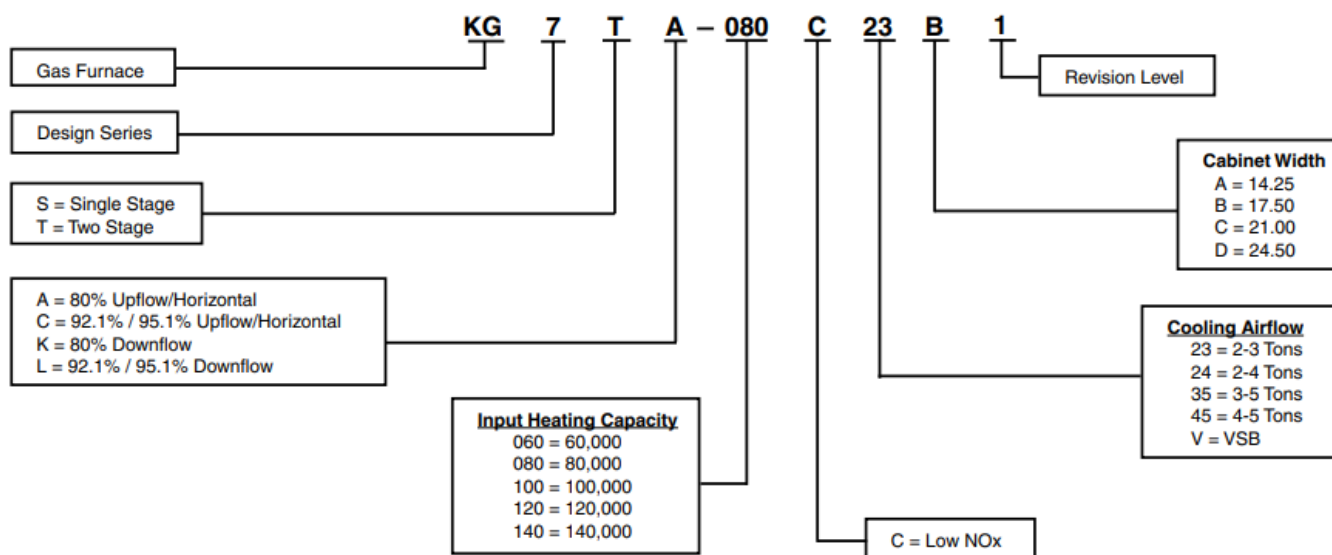

SPECIFICATIONS

KG7TA/TK MODEL NUMBERS	060C-23A1	080C-24B1	100C-24B1	100C-35C1	120C-35C1	140C-45D1
Input – Btuh (a)	60,000 / 39,000	80,000 / 52,000	100,000 / 65,000	100,000 / 65,000	120,000 / 78,000	140,000 / 91,000
Heating Capacity – Btuh	48,000 / 31,200	64,000 / 41,600	80,000 / 52,600	80,000 / 52,600	96,000 / 62,400	112,000 / 72,800
AFUE	80.0	80.0	80.0	80.0	80.0	80.0
Blower D x W	10 x 6	11 x 8	11 x 8	11 x 10	11 x 10	11 x 10
Motor H.P. – Speed – Type	1/2 BLDC	1/2 BLDC	1/2 BLDC	3/4 BLDC	3/4 BLDC	1 BLDC
Motor FLA	6.2	6.2	8.7	8.7	8.7	11.7
Rated Ext. SP – In. W.C.	0.5	0.5	0.5	0.5	0.5	0.5
Temperature Rise Range – °F	25-55	30-60	30-60	35-65	35-65	40-70
Shipping Weights – T A	104lbs	116lbs	120lbs	135lbs	135lbs	154lbs
Shipping Weights – T K	104lbs	116lbs	116lbs	135lbs	140lbs	146lbs

- **All** models are 115 V and 60 HZ. Gas connections are 1/2" N.P.T.
- **AFUE=** Annual Fuel Utilization Efficiency

ACCESSORIES

KG7TA/TK KITS	
Description	SKU
Fixed Speed to Variable Speed	904880
"A" Cabinet Downflow Sub Base Kit	902974
"B", "C", "D" Cabinet Downflow Sub Base Kit	904911
U.S. LP Conversion Kit (0 to 10,000 ft.)	905028
Canada LP Conversion Kit (0 to 4,500 ft.)	905029
Bottom Return Filter 20 per Box, "B" Cabinet	904916
Bottom Return Filter 20 per Box, "D" Cabinet	904918
Side Return Filter Kit	541036

GENERAL TERMS OF LIMITED WARRANTY

- Nortek Global HVAC, LLC will furnish a replacement for any part of this product that fails in normal use and

service within the terms and conditions of the warranty.

- For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nortek Global HVAC, LLC warranty department for a copy.
- Before purchasing this appliance, read important energy cost and efficiency information available from your retailer.
- Specifications and illustrations are subject to change without notice and without incurring obligations.
- Printed in U.S.A (06/2017)
- 834C-0617 (Replaces 834C-0916)
- www.gibsonhvac.com
- GIBSON is a pending or registered trademark of Electrolux Home Products Inc. and used under a license from Electrolux Home Products, Inc. © Nortek Global HVAC, LLC. All Rights Reserved.

Documents / Resources

 Gibson Two Stage Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces Model: KG7T (A and K Series)	Gibson KG7T Two Stage Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces [pdf] User Manual KG7T Two Stage Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces, KG7T, Two Stage Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces, Fixed Speed High Efficiency Upflow Horizontal and Downflow Gas Furnaces, High Efficiency Upflow Horizontal and Downflow Gas Furnaces, Upflow Horizontal and Downflow Gas Furnaces, Horizontal and Downflow Gas Furnaces, and Downflow Gas Furnaces, Downflow Gas Furnaces, Gas Furnaces
---	--

References

- [User Manual](#)