

Z-Lite 919MP24-7L-MB-LED

Z-Lite 919MP24-7L-MB-LED Forest Linear LED Chandelier User Manual

Model: 919MP24-7L-MB-LED | Brand: Z-Lite

INTRODUCTION

This manual provides essential information for the safe installation, operation, and maintenance of your Z-Lite 919MP24-7L-MB-LED Matte Black Forest Linear LED Chandelier. Please read these instructions thoroughly before proceeding with installation or use. Retain this manual for future reference.

The Z-Lite Forest Linear LED Chandelier is a contemporary seven-light fixture designed for indoor use. It features a matte black finish, integrated LED lighting, and a linear design suitable for various room types including living rooms, dining rooms, and kitchens.

Key Features:

- **Linear Design:** Elongated silhouette for modern aesthetics.
- **Sleek Shades:** Slim and elegant design.
- **Built-in LEDs:** Integrated LED light sources, eliminating the need for separate bulbs.
- **Adjustable Brightness:** Dimmable for energy efficiency and ambiance control.

SETUP AND INSTALLATION

Important Safety Information: Installation of this fixture requires electrical wiring knowledge. If you are unsure about any part of the installation process, consult a qualified electrician. Ensure power is turned off at the circuit breaker before beginning installation to prevent electrical shock.

This chandelier is designed for ceiling mount, semi-flush installation. Due to its weight (approximately 30 pounds) and dimensions (54" L x 4.75" W x 23.75" H), it is recommended that two people perform the installation.

Included Components:

- Chandelier fixture with integrated LED Bulbs
- Mounting hardware (typically includes mounting plate, screws, wire nuts)
- Installation instructions

Tools Required (Not Included):

- Screwdriver (Phillips and flathead)
- Wire strippers
- Electrical tape
- Ladder
- Voltage tester

Installation Steps:

1. **Turn Off Power:** Locate the circuit breaker controlling the light fixture's location and switch it to the OFF position. Verify power is off using a voltage tester.
2. **Prepare Mounting Location:** If replacing an existing fixture, carefully remove it. Ensure the junction box is securely mounted and capable of supporting the fixture's weight.
3. **Attach Mounting Plate:** Secure the mounting plate to the junction box using the provided screws.
4. **Wire Connections:** Carefully connect the fixture's wires to the household electrical wires according to standard electrical codes (typically black to black, white to white, and ground to ground). Use wire nuts to secure connections and wrap with electrical tape.
5. **Mount Fixture:** Carefully lift the chandelier and attach it to the mounting plate, securing it with the provided screws or nuts. Ensure all wires are tucked safely into the junction box.
6. **Restore Power:** Once the fixture is securely installed, turn the power back on at the circuit breaker.

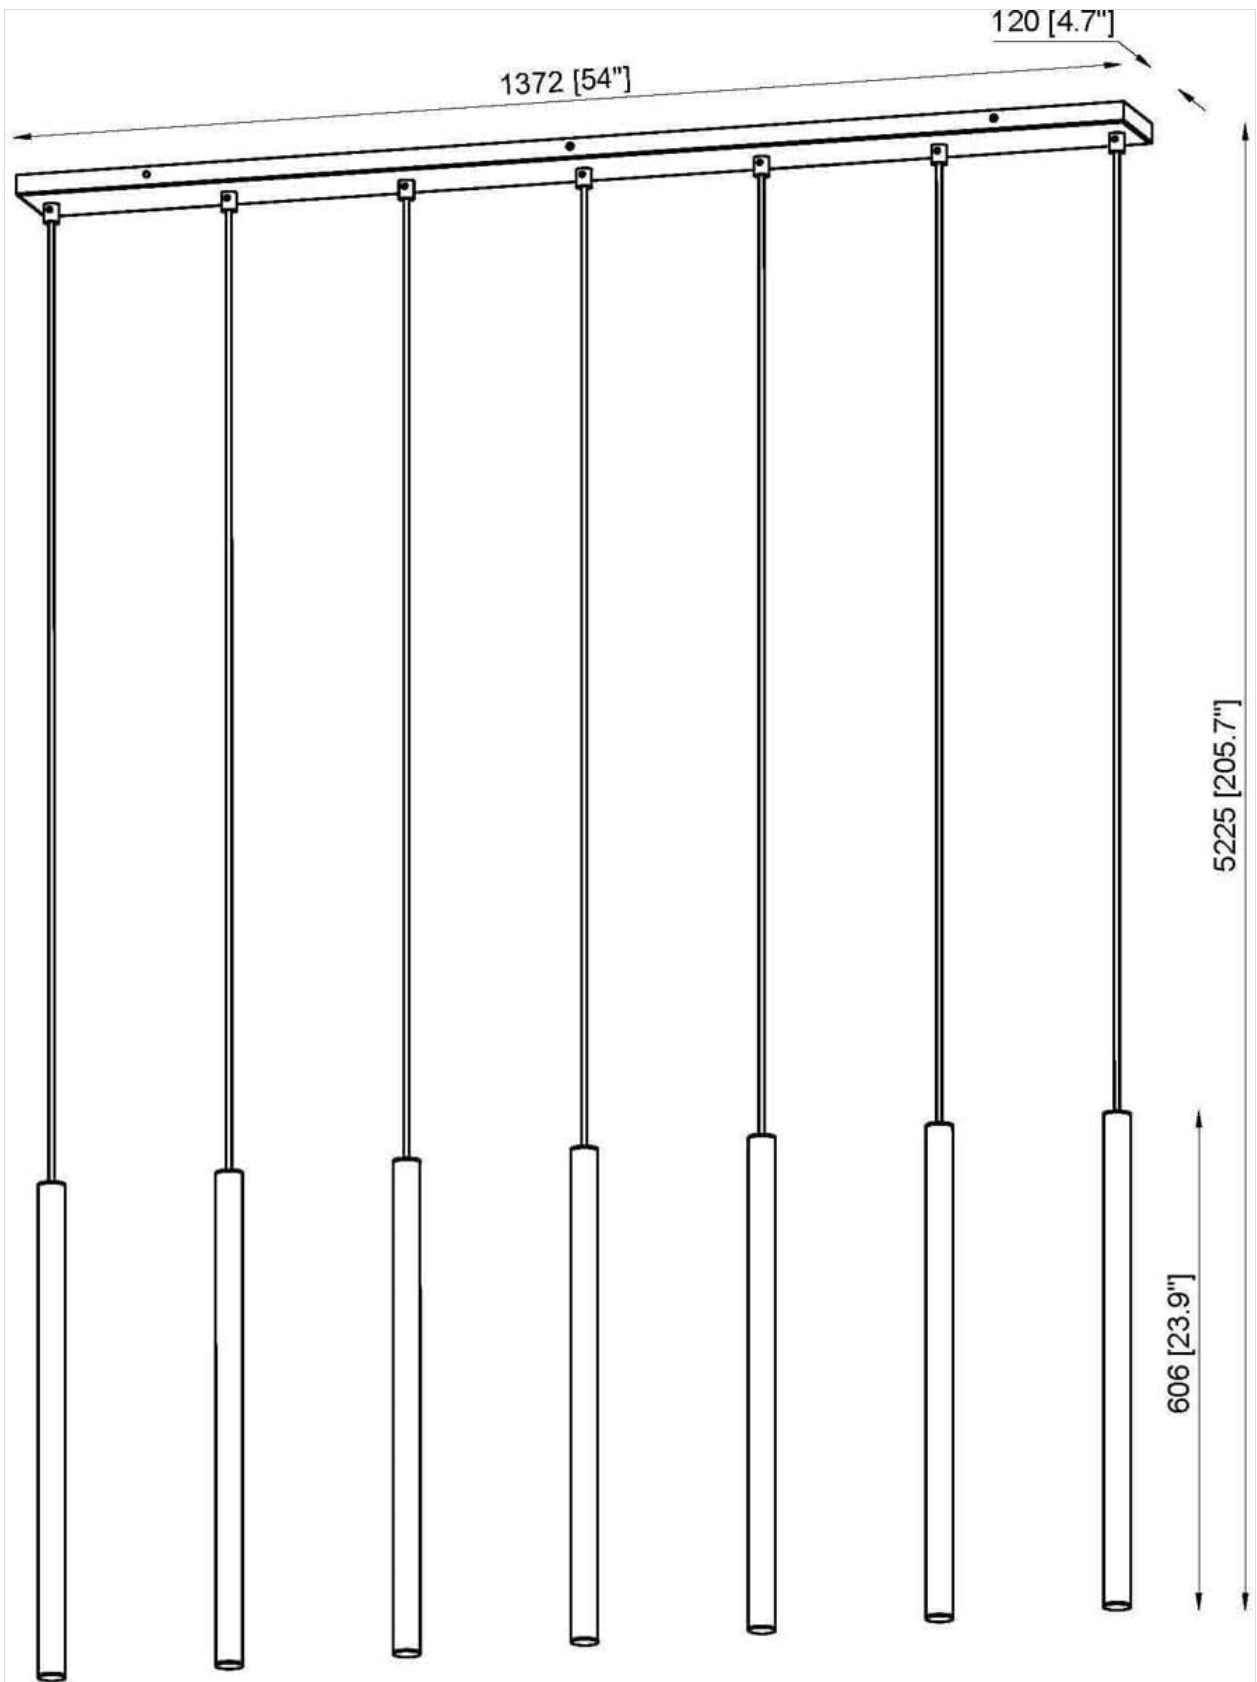


Figure 1: Dimensional drawing of the chandelier, illustrating its 54-inch length, 4.75-inch width, and 23.75-inch height.



Figure 2: Chandelier installed in a kitchen, demonstrating its linear design over an island.

OPERATING INSTRUCTIONS

The Z-Lite Forest Linear LED Chandelier is designed for straightforward operation once installed.

Turning On/Off:

Operate the chandelier using a standard wall switch connected to the fixture's electrical circuit.

Dimming Functionality:

This fixture features dimmable LED lights. To utilize the dimming function, ensure you have installed a

compatible LED dimmer switch (sold separately) in your wall switch location. Follow the dimmer switch manufacturer's instructions for installation and operation.

- **Light Source:** Integrated LED
- **Number of Lights:** 7
- **Light Color:** Warm White
- **Color Temperature:** 3000 Kelvin
- **Voltage:** 120 Volts

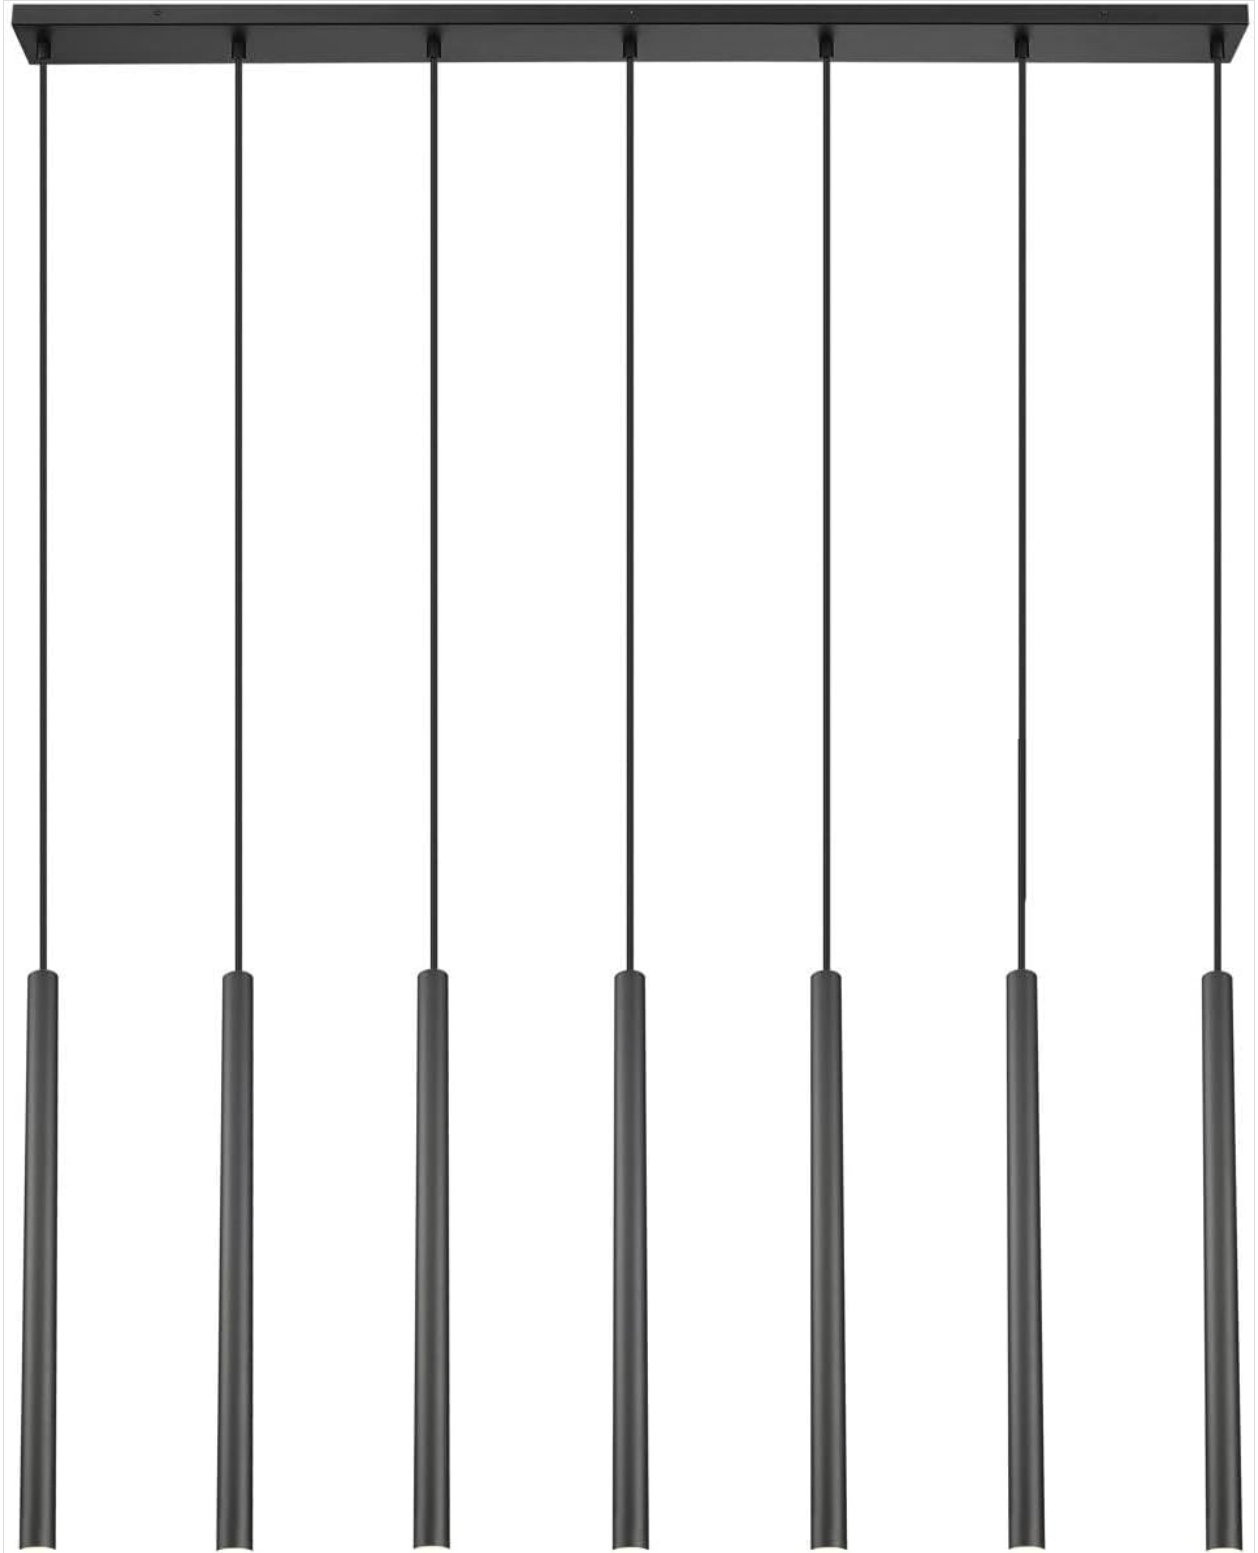


Figure 3: Detailed view of the chandelier's seven LED light sources.

Regular maintenance will help preserve the appearance and functionality of your Z-Lite chandelier.

Cleaning:

- **Before Cleaning:** Always ensure the power to the fixture is turned off at the circuit breaker before cleaning.
- **Metal Parts:** Use a soft, dry cloth or a duster specifically designed for metal parts to gently wipe down the matte black finish. Avoid abrasive cleaners or harsh chemicals, as these can damage the finish.
- **LED Components:** The integrated LED components do not require special cleaning beyond a light dusting. Do not attempt to disassemble the LED modules.
- **General Dusting:** For general dusting, a lint roller can be used on fabric components (if any, though this fixture is primarily metal).

Bulb Replacement:

This fixture uses integrated LED light sources, which are designed for long life and are not user-replaceable. If an LED module fails, contact Z-Lite customer service for assistance.

TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power to the fixture. Loose wire connection. Faulty wall switch.	Check circuit breaker. Ensure all wire connections are secure (with power off). Test or replace wall switch.
Lights flicker.	Incompatible dimmer switch. Loose wire connection. Voltage fluctuations.	Ensure an LED-compatible dimmer is used. Check wire connections (with power off). Consult an electrician if voltage issues persist.
Fixture hums.	Incompatible dimmer switch. Loose mounting.	Replace with an LED-compatible dimmer. Ensure fixture is securely mounted.

If these steps do not resolve the issue, please contact Z-Lite customer support.

SPECIFICATIONS

Feature	Detail
Brand	Z-Lite
Model Number	919MP24-7L-MB-LED
Color	Matte Black
Material	Alloy Steel

Feature	Detail
Style	Modern
Fixture Type	Chandelier / Island Light
Mounting Type	Ceiling Mount, Semi Flush Mount
Light Source	Integrated LED
Number of Light Sources	7
Wattage (per light)	5 Watts
Total Light Output	3500 Lumens
Color Temperature	3000 Kelvin (Warm White)
Voltage	120 Volts
Control Method	Touch (via compatible dimmer switch)
Item Dimensions (L x W x H)	54" L x 4.75" W x 23.75" H
Item Weight	30 Pounds
Indoor/Outdoor Usage	Indoor
Required Assembly	Yes
Certification	ETL Listed

WARRANTY INFORMATION

This Z-Lite chandelier is covered by a **1-year manufacturer's limited warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use and service. It does not cover damage resulting from improper installation, accident, misuse, abuse, or unauthorized repairs.

For warranty claims or further details, please retain your proof of purchase and contact Z-Lite customer service.

CUSTOMER SUPPORT

If you have any questions regarding the installation, operation, or maintenance of your Z-Lite 919MP24-7L-MB-LED Forest Linear LED Chandelier, please contact Z-Lite customer service.

Please have your model number (919MP24-7L-MB-LED) and proof of purchase available when contacting support.

For the most current contact information, please visit the official Z-Lite website or refer to the packaging materials.

