



GOAL ZERO Lighthouse micro Flash LED Lantern and Flashlight User Guide

[Home](#) » [GOAL ZERO](#) » GOAL ZERO Lighthouse micro Flash LED Lantern and Flashlight User Guide 

Contents

- [1 GOAL ZERO Lighthouse micro Flash LED Lantern and Flashlight](#)
- [2 BEFORE FIRST USE](#)
- [3 GET TO KNOW YOUR GEAR](#)
- [4 HOW IT WORKS](#)
- [5 RECHARGE YOUR LIGHTHOUSE MICRO FLASH](#)
- [6 TECHNICAL SPECIFICATIONS](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)



GOAL ZERO Lighthouse micro Flash LED Lantern and Flashlight



BEFORE FIRST USE

Take Lighthouse Micro Flash out of DEMO MODE by plugging it into a powered USB port. Not near a USB? Press the On/Off/Dimmer Button five times and hold on the sixth. The Battery Indicator will flash and Lighthouse Micro Flash will be out of DEMO MODE.

GET TO KNOW YOUR GEAR



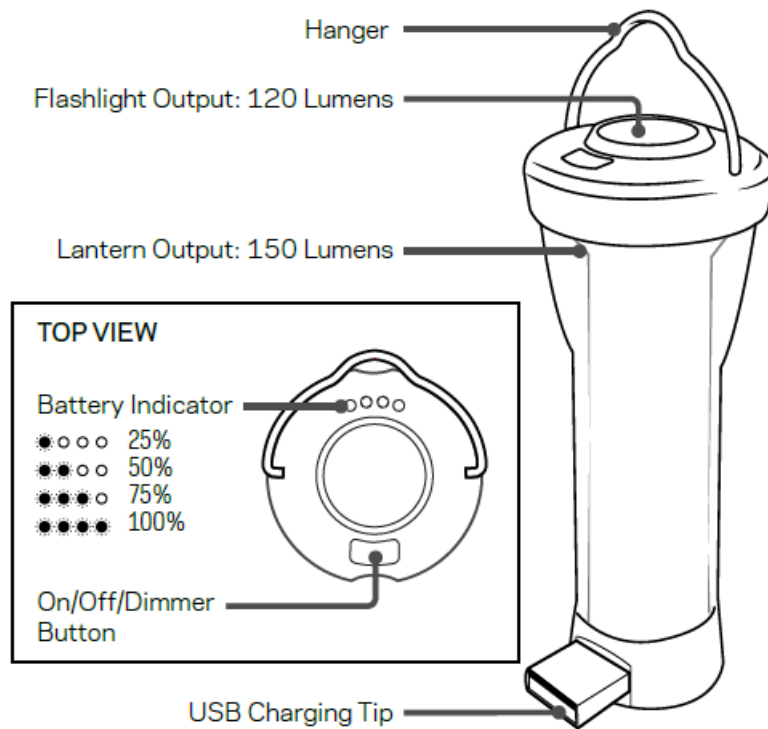
USB
Rechargeable



Hour Runtime
on Lowest Setting



Weatherproof
IPX6 Rated



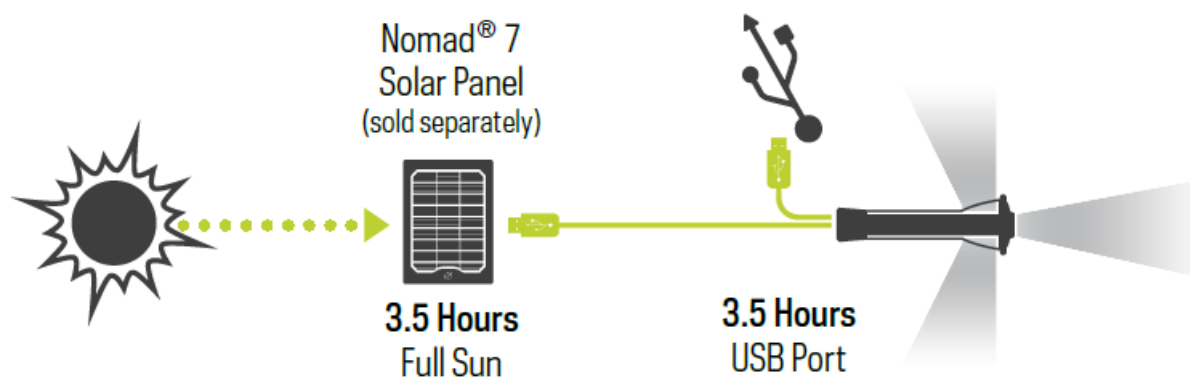
HOW IT WORKS

1. Push the On/Off/Dimmer Button once for flashlight mode; twice for high; three times for low.
2. Press and hold to dim each mode.
3. Using the flip-out USB tip, plug Lighthouse Micro Flash into any powered USB port to charge it up in 3.5 hours.
Also charges from 3.5 hours of full sun from the Nomad® 7.
Still in DEMO MODE? See the front cover for instructions.




RUNTIME		LUMENS	CHARGE TIME	
Lantern – One Side (Low)	170 hours	10 lumens	USB source	3.5 hours
Lantern – One Side (High)	15 hours	75 lumens	Nomad 7	3.5 hours
Lantern – Both Sides (Low)	80 hours	20 lumens		
Lantern – Both Sides (High)	7 hours	150 lumens		
Flashlight (Low)	100 hours	20 Lumens		
Flashlight (High)	8.5 hours	120 Lumens		

RECHARGE YOUR LIGHTHOUSE MICRO FLASH

Recharge from USB or solar panel.




TECHNICAL SPECIFICATIONS

Battery	
Cell chemistry	Li-ion NMC
Cell type	18650
Cell capacity	9.62Wh (3.7V, 2600mAh)
Lifecycles	hundreds of cycles
Shelf-life	Charge every 3-6 months
Ports	
USB port (input)	5V, up to 1A (5W max)
General	
Durability	IPX6
Weight	2.4 oz (68g)
Dimensions	3.66 x 1.5in (93 x 37.75mm)
Operating usage temp.	32-104 F (0-40 C)
Certs	  
Warranty	12 months

Be sure to activate your warranty at goalzero.com/warranty

Documents / Resources

	<p>GOAL ZERO Lighthouse micro Flash LED Lantern and Flashlight [pdf] User Guide Lighthouse micro Flash LED Lantern and Flashlight, micro Flash LED Lantern and Flashlight, L ED Lantern and Flashlight, Flashlight</p>
---	--