

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Smartlinx](#) /

› [Smartlinx SL-S5 16-inch Triple Display Laptop Screen Extender User Manual](#)

Smartlinx SL-S5

Smartlinx SL-S5 16-inch Triple Display Laptop Screen Extender User Manual

Model: SL-S5 | Brand: Smartlinx

INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your Smartlinx SL-S5 16-inch Triple Display Laptop Screen Extender. This portable monitor system is designed to enhance productivity by providing two additional 2560x1600P QHD displays for your laptop. It is compatible with a wide range of laptops and devices, offering a versatile solution for various work environments.

PACKAGE CONTENTS

Please verify that all items listed below are included in your package:

- Smartlinx SL-S5 Triple Display Monitor Unit
- USB-C to USB-C Cables (x2)
- HDMI Cable (Mini HDMI to HDMI)
- USB-C to USB-A Cable
- Carry Bag
- User Manual (this document)



16-inch Laptop Screen Extender

THE FIRST IN AMAZON



2500p,
QHD



IPS
Panel



16:10
aspect ratio



Adjustable
Brightness



Low
Blue Light



Anti-
glare



Flicker-
free



Widely
compatible



Figure 1: Package Contents. Includes the triple screen unit, carry bag, and all necessary cables for connection.

COMPATIBILITY

The Smartlinx SL-S5 is designed for broad compatibility with laptops ranging from 12 to 17 inches. It supports various operating systems and devices:

- **Operating Systems:** Windows, ChromeOS, Android, Linux, Samsung DeX, and MacOS (Pro/Max chips).
- **Note on MacOS:** Not compatible with MacBook Air M1/M2/M3 chips, MacBook Pro 2012 and earlier, or MacBook Air 2017 and earlier.
- **Other Devices:** Compatible with PS4 and other devices supporting video output via USB-C or HDMI.

Adjustable viewing angles

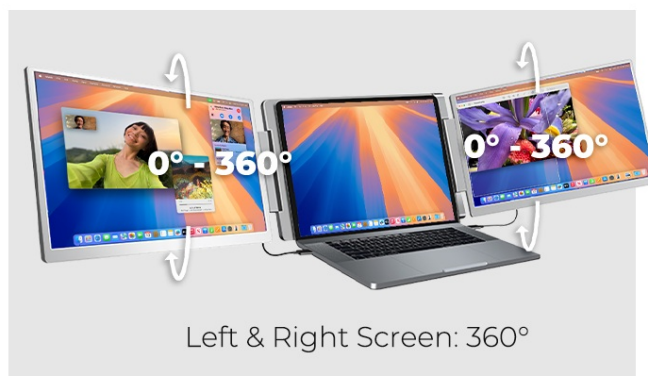


Figure 2: Compatibility overview for the Smartlinx SL-S5.

SETUP INSTRUCTIONS

The Smartlinx SL-S5 is designed for driver-free, plug-and-play setup. Follow these steps to connect your triple display extender:

1. **Positioning:** Place the triple display unit on a stable surface. The integrated back panel and kickstand provide support.
2. **Laptop Placement:** Carefully place your laptop within the central frame of the extender. Ensure it is securely seated.
3. **Connection Method 1 (USB-C for Video and Power):**
 - If your laptop's USB-C ports support display functionality (DisplayPort Alternate Mode), connect one USB-C to USB-C

cable from each screen extender to a separate USB-C port on your laptop. This provides both video and power.

4. Connection Method 2 (HDMI + USB-A for Video and Power):

- If your laptop's USB-C port only supports charging, or if you prefer using HDMI, connect the Mini HDMI to HDMI cable from each screen extender to your laptop's HDMI port.
- Additionally, connect the USB-C to USB-A cable from each screen extender to a USB-A port on your laptop for power.

5. **Power:** The screens require 5V 2A power each. Ensure your laptop or an external power source can provide sufficient power.

6. **Initial Display Configuration:** Once connected, your operating system should detect the new displays. You may need to adjust display settings (e.g., extend, mirror, or split-screen modes) in your system's display preferences.



Figure 3: Illustrated connection methods for the Smartlinx SL-S5.



Figure 4: Overview of compatible video and power ports.

Your browser does not support the video tag.

Video 1: Demonstrates the setup process of the 16-inch Laptop Screen Extender, showing how to connect it to a laptop and configure the displays.

OPERATION

The Smartlinx SL-S5 offers flexible display options and adjustable settings for optimal viewing.

Adjustable Viewing Angles

Each screen can be rotated independently to suit your needs:

- Left Screen: 0° to 245° rotation.
- Right Screen: 0° to 205° rotation.
- Both screens can rotate up to 360° for presentations or privacy.

Connection Methods

Before purchasing, please make sure your computer has the following:

Full-function Type-C

USB-A Interface

HDMI Interface

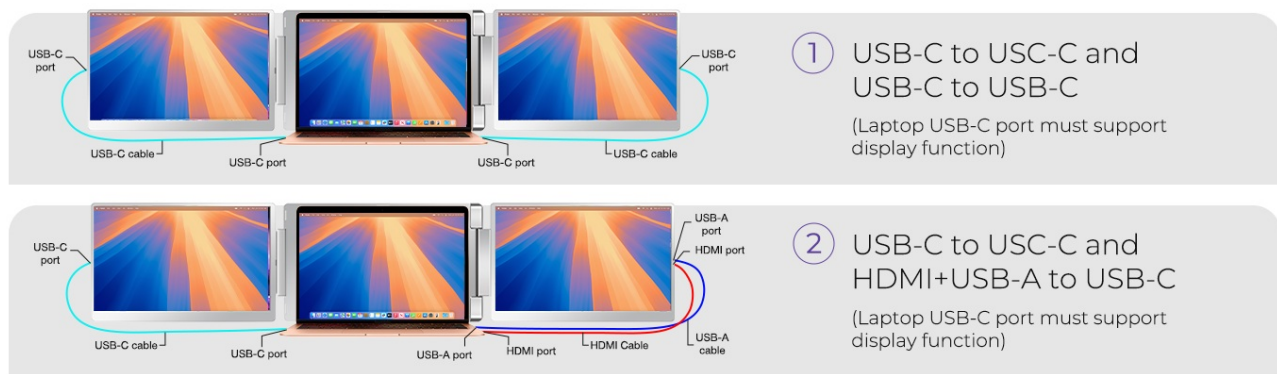


Figure 5: Adjustable screen rotation for flexible viewing.

Display Modes

The extender supports mirror, presentation, and split-screen modes, configurable through your laptop's display settings.

On-Screen Display (OSD) Controls

Use the built-in side controls to adjust display settings:

- **Brightness:** Adjust the screen brightness (up to 300 nits).
- **Contrast:** Modify the contrast levels.
- **ECO Mode:** Select from various ECO modes (Standard, Game, Movie, Text, FPS, RTS) for optimized viewing.
- **Blue Light Filter:** Reduce blue light emission for eye comfort during prolonged use.
- **HDR:** Enable High Dynamic Range for enhanced visual quality.
- **Sharpness:** Adjust image sharpness.

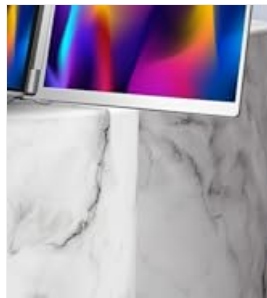


Figure 6: Side controls for adjusting display settings.



Your browser does not support the video tag.

Video 2: Demonstrates the features of the Portable Tri Screen Monitor, including its 2.5K resolution and various usage scenarios.

KEY FEATURES

- **2.5K QHD Display:** Dual 16-inch IPS screens with 2560x1600 resolution and 300 nits brightness for clear visuals.
- **16:10 Aspect Ratio:** Provides more vertical screen space, ideal for coding, document editing, and browsing.
- **Eye-Friendly Technology:** Features low blue light, anti-glare coating, and flicker-free viewing to reduce eye strain.
- **Adjustable & Detachable Design:** Screens offer 235° horizontal and 90° vertical rotation. Detachable structure allows for solo use of individual screens.
- **Portable:** Lightweight at 2.1 lbs per side, making it easy to transport for business trips or remote work.

Special Features

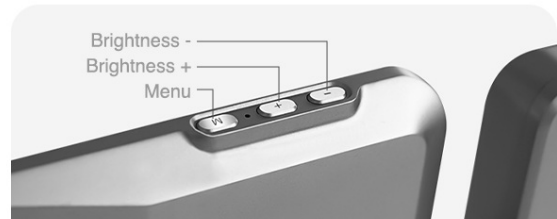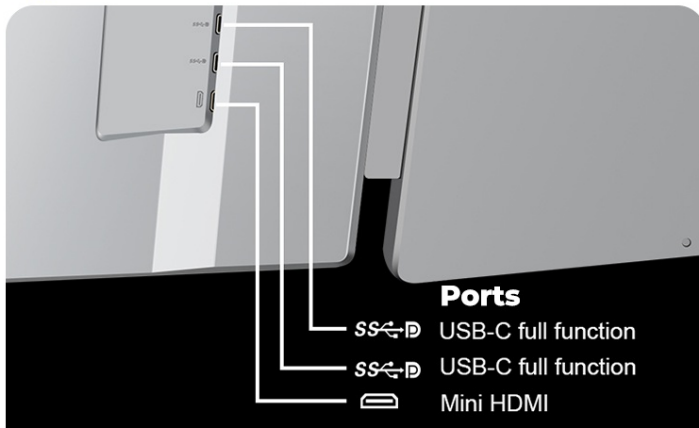

Special Metal Logo



Figure 7: Overview of the Smartlinx SL-S5's main features.

MAINTENANCE

To ensure the longevity and optimal performance of your Smartlinx SL-S5, follow these maintenance guidelines:

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screen surfaces. For stubborn marks, slightly dampen the cloth with water or a screen-safe cleaning solution. Avoid harsh chemicals or abrasive materials.
- **Storage:** When not in use, fold the unit compactly and store it in the provided carry bag to protect it from dust and scratches.
- **Handling:** Handle the unit with care. Avoid dropping it or applying excessive force to the screens or hinges.
- **Cables:** Ensure cables are not bent sharply or tangled, which can cause damage over time.

TROUBLESHOOTING

If you encounter issues with your Smartlinx SL-S5, refer to the following common problems and solutions:

- **"No Signal" Message:**
 - Ensure all cables (USB-C or HDMI + USB-A) are securely connected to both the extender and your laptop.
 - Verify that your laptop's USB-C port supports DisplayPort Alternate Mode if using USB-C for video. If not, use the HDMI + USB-A connection method.
 - Check your laptop's display settings to ensure the external monitors are detected and configured to "Extend" or "Duplicate" your display.
- **One Screen Not Working:**
 - Check the specific cable connection for that screen. Try re-seating the cable or using a different port on your laptop if available.
 - Ensure the screen is receiving power. If using USB-A for power, confirm the USB-A port is functional.
- **Flickering or Unstable Display:**
 - Ensure all connections are secure.
 - Try reducing the display resolution or refresh rate in your laptop's display settings.
 - Ensure your laptop is providing sufficient power to both screens. An external power adapter might be necessary if your laptop's ports cannot supply enough power.
- **Screens Not Rotating Correctly:**

- Ensure the screens are properly attached and the hinges are not obstructed.
- Adjust the display orientation in your operating system's display settings.

If these steps do not resolve the issue, please contact Smartlinx customer support for further assistance.

SPECIFICATIONS

Feature	Detail
Model Number	SL-S5
Screen Size	16 inches (each display)
Resolution	2560 x 1600 Pixels (QHD)
Aspect Ratio	16:10
Image Brightness	300 Candela per Square Meter (nits)
Screen Surface	Matte
Product Dimensions	11.81 x 5.91 x 11.81 inches
Item Weight	2.5 pounds
Total USB Ports	2 (USB-C for each screen)
Manufacturer	Smartlinx

WARRANTY AND SUPPORT

The Smartlinx SL-S5 is backed by a 2-Year Warranty, ensuring quality and reliability. For technical support, troubleshooting assistance, or warranty claims, please contact Smartlinx customer service.

You can typically reach the seller through the platform where you purchased the product. Look for an "Ask a question" or "Contact Seller" option on the product page or in your order history.

1 Million+ Happy Users

High Quality Products

No Cost For Replacement

Responsive 1 to 1 Service

How to Reach Out to a Seller on Amazon?

Add to Cart

Sold by Smartlink Solutions

Have a question for SMARTLINK?

Ask a question

What can I help you with?

- An order I have placed
- An item for sale

Figure 8: Guide on how to contact the seller for support.

