

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Logitech](#) /

› [Logitech Signature Plus M750 Wireless Mouse User Manual](#)

Logitech M750

Logitech Signature Plus M750 Wireless Mouse User Manual

Model: M750

INTRODUCTION

The Logitech Signature Plus M750 Wireless Mouse is designed for enhanced productivity and comfort. Featuring SmartWheel scrolling, silent clicks, and multi-device connectivity, it offers a versatile and quiet user experience. This manual provides detailed instructions for setting up, operating, maintaining, and troubleshooting your M750 mouse.



Image: The Logitech Signature Plus M750 Wireless Mouse in Graphite color, showing its ergonomic design and central scroll wheel.

WHAT'S IN THE Box

Verify that all items are present in the packaging:

- Wireless Mouse
- USB Receiver
- 2 AA Battery
- User documentation

SETUP

1. Battery Installation

1. Locate the battery compartment on the underside of the mouse.
2. Open the battery compartment cover.
3. Insert the provided AA battery, ensuring correct polarity (+/-).
4. Close the battery compartment cover securely.

2. Connecting Your Mouse

The M750 mouse offers two connection methods: Bluetooth and Logi Bolt USB receiver.

Connect via Bluetooth or Logi Bolt USB receiver



Image: Diagram illustrating the two connection methods for the Logitech M750 mouse: Bluetooth and the Logi Bolt USB receiver.

A. Using the Logi Bolt USB Receiver

1. Remove the Logi Bolt USB receiver from the mouse's battery compartment (if stored there).
2. Plug the Logi Bolt USB receiver into an available USB port on your computer.
3. Turn on the mouse using the power switch on its underside. The mouse should automatically connect.

B. Using Bluetooth

1. Turn on the mouse using the power switch on its underside.
2. Press and hold the Easy-Switch button on the underside of the mouse for 3 seconds until the LED light starts blinking rapidly, indicating pairing mode.
3. On your computer or device, open Bluetooth settings.
4. Select "Logitech M750" from the list of available devices to pair.
5. Once connected, the LED light on the mouse will glow solid for 5 seconds.

OPERATING YOUR MOUSE

SmartWheel Scrolling

The SmartWheel automatically switches between line-by-line precision scrolling and super-fast free-spinning scrolling. Simply flick the wheel to activate the desired mode. This feature is ideal for navigating long documents or web pages efficiently.



Image: A close-up view of the SmartWheel on the Logitech M750 mouse, highlighting its capability for both precision and high-speed scrolling.

Silent Clicks

The M750 features SilentTouch technology, reducing click noise by 90% compared to traditional mice. This allows for a quieter working environment, ideal for shared spaces or late-night use.

90% less clicking noise



Image: A user operating the Logitech M750 mouse in a quiet office setting, emphasizing the 90% reduction in clicking noise.

Customizable Side Buttons

The side buttons on the M750 mouse can be customized to perform your favorite shortcuts using Logitech Options+ software (available for Windows and macOS). Common shortcuts include back/forward navigation or copy/paste functions.

Customize buttons to your favorite shortcuts

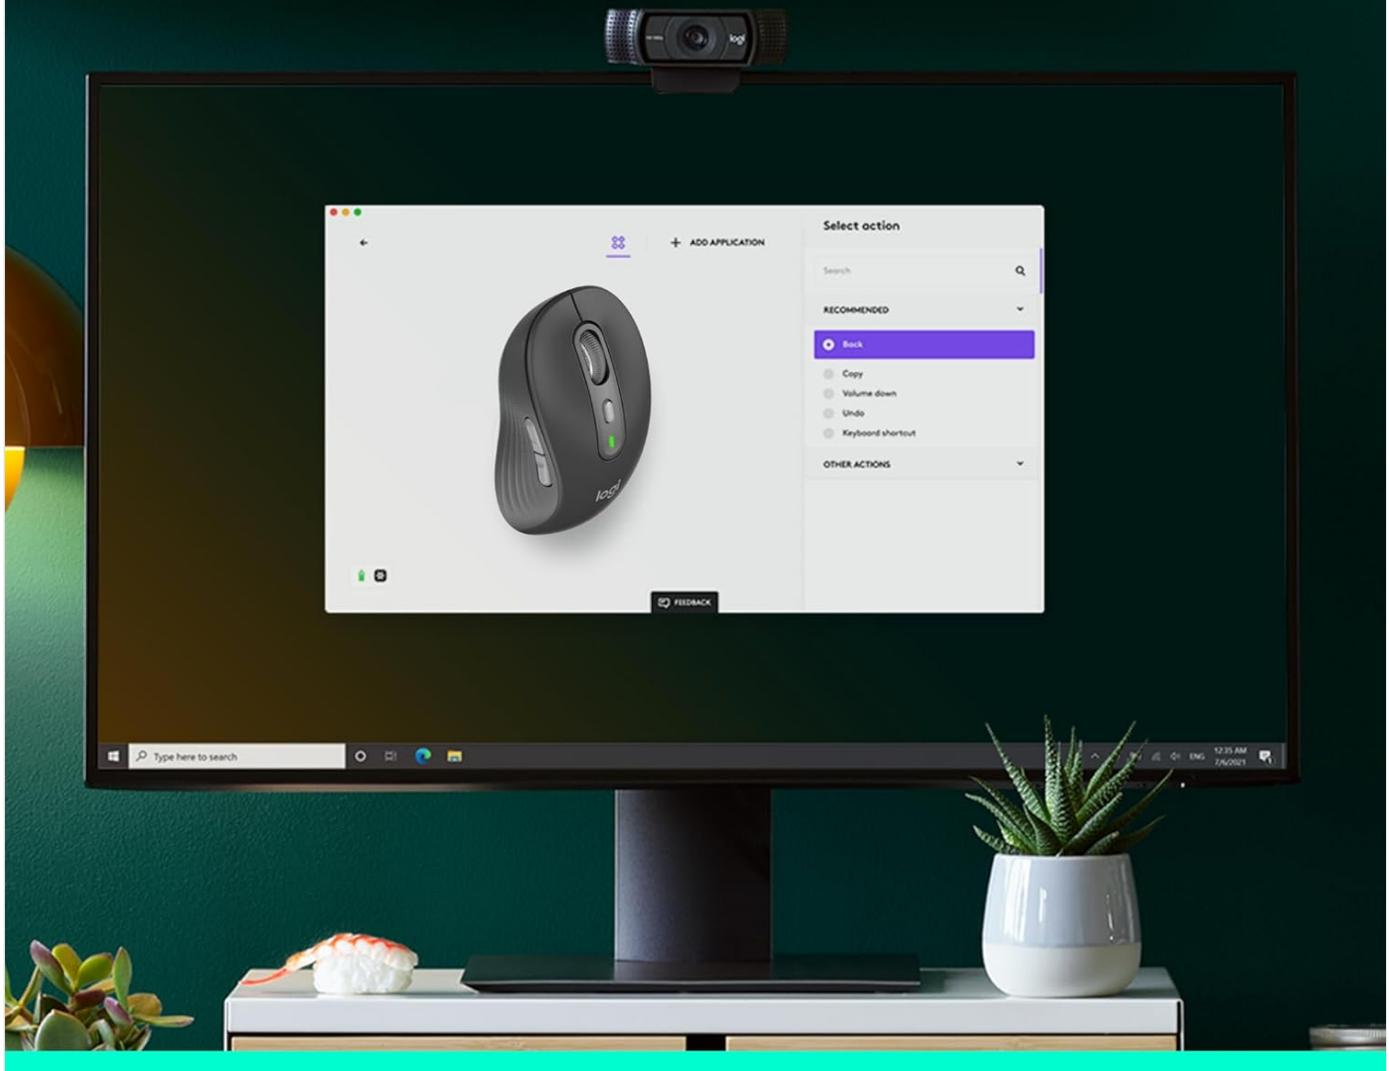


Image: A computer screen displaying the Logitech Options+ software interface, demonstrating how to customize the side buttons of the M750 mouse for various shortcuts.

Multi-Device Connectivity (Easy-Switch & Flow)

The M750 allows you to pair and switch between up to three Bluetooth devices. Additionally, with Logitech Flow, you can effortlessly transfer text, images, and files between Windows and macOS operating systems by simply moving your cursor to the edge of the screen.

Ergonomic Design

The contoured shape, soft thumb area, and rubber side grips of the M750 mouse are designed for long hours of comfortable use, ensuring your hand remains snug and supported.



Comfort shape and feel with rubber side grips

Image: A detailed view of the Logitech M750 mouse, showcasing its ergonomic shape and textured rubber side grips designed for enhanced comfort.

MAINTENANCE

Cleaning Your Mouse

- Turn off the mouse before cleaning.
- Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution to wipe the surface of the mouse.
- Avoid using abrasive cleaners, solvents, or aerosol sprays directly on the mouse.
- For the optical sensor, use a dry cotton swab to gently remove any dust or debris.

Battery Life

The M750 mouse is designed for extended battery life, lasting up to 24 months on a single AA battery. When the battery is low, the LED indicator on the mouse will turn red. Replace the battery promptly to ensure uninterrupted use.

TROUBLESHOOTING

Issue	Possible Solution
Mouse not responding	<p>Ensure the mouse is turned on.</p> <p>Check battery level and replace if necessary.</p> <p>For USB receiver: Try plugging the receiver into a different USB port.</p> <p>For Bluetooth: Ensure Bluetooth is enabled on your device and re-pair the mouse.</p> <p>Move the mouse closer to the receiver/device to reduce interference.</p>
Cursor movement is erratic or jumpy	<p>Clean the optical sensor on the underside of the mouse.</p> <p>Use the mouse on a clean, non-reflective surface.</p> <p>Ensure there are no obstructions between the mouse and the receiver/device.</p>
Cannot customize buttons	<p>Download and install the latest version of Logitech Options+ software from the official Logitech website.</p> <p>Ensure your mouse is connected and recognized by the software.</p>
Difficulty switching between devices	<p>Ensure all devices are properly paired with the mouse.</p> <p>Press the Easy-Switch button firmly to cycle through connected devices.</p>

SPECIFICATIONS

Dimensions



Weight (with receiver and battery): 103.1 g (3.64 oz)

Image: Technical diagram illustrating the dimensions of the Logitech M750 mouse in millimeters and inches, along with its weight.

- **Model:** M750
- **Connectivity Technology:** Bluetooth, USB (via Logi Bolt receiver), Radio Frequency
- **Movement Detection Technology:** Optical, Laser
- **Special Features:** Wireless, Portable, Programmable Buttons, Lightweight, Soundless (SilentTouch)
- **Battery Type:** 1 x AA battery (included)
- **Battery Life:** Up to 24 months
- **Product Dimensions:** 4.26 x 2.4 x 0.1 inches (108.2 x 61 x 38.8 mm)
- **Item Weight:** 3.64 ounces (103.1 g with receiver and battery)
- **Color:** Graphite
- **Compatibility:** Windows, macOS, Linux, ChromeOS, iPadOS, Android
- **Recycled Plastic Content:** 61% (Graphite model)

WARRANTY AND SUPPORT

For warranty information and technical support, please visit the official Logitech support website. You can find FAQs, troubleshooting guides, and contact information for customer service there.

