

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [AULA](#) /

› [AULA F75 Pro Wireless Mechanical Keyboard and SC580 Wireless Gaming Mouse Combo User Manual](#)

## AULA F75 Pro / SC580 Combo

# AULA F75 Pro Wireless Mechanical Keyboard and SC580 Wireless Gaming Mouse Combo User Manual

Model: F75 Pro (Keyboard) / SC580 (Mouse)

## 1. INTRODUCTION

Thank you for choosing the AULA F75 Pro Wireless Mechanical Keyboard and SC580 Wireless Gaming Mouse Combo. This manual provides detailed instructions for setting up, operating, and maintaining your new peripheral set. Please read this manual carefully before use to ensure optimal performance and longevity of your devices.



Image 1.1: The AULA F75 Pro Wireless Mechanical Keyboard and SC580 Wireless Gaming Mouse Combo.

## 2. PACKAGE CONTENTS

Please check the package contents upon unboxing:

- AULA F75 Pro Wireless Mechanical Keyboard

- AULA SC580 Wireless Gaming Mouse
- USB-C to USB-A Cable (for charging and wired connection)
- 2.4GHz USB Receiver
- Keycap Puller (for keyboard)
- Switch Puller (for keyboard)
- User Manual (this document)

### 3. PRODUCT OVERVIEW

#### 3.1. AULA F75 Pro Wireless Mechanical Keyboard

The F75 Pro keyboard features a 75% layout with a knob, gasket structure, and hot-swappable switches for a customizable typing experience. It supports three connection modes: Bluetooth 5.0, 2.4GHz wireless, and USB-C wired.



Image 3.1: Key features of the AULA F75 Pro Mechanical Keyboard, including BT5.0/2.4G/Wired connectivity, Gasket Structure, Pre-lubed Linear Switches, RGB Backlit, 4000mAh Battery, Side-engraved PBT Keycaps, Hot Swappable switches,

and a 75% Layout with Knob.

### 3.2. AULA SC580 Wireless Gaming Mouse

The SC580 mouse offers versatile connectivity with 2.4GHz wireless, Bluetooth 5.0, and USB-C wired modes. It features adjustable DPI levels and a high polling rate for precise control.



Image 3.2: Key features of the AULA SC580 Wireless Gaming Mouse, highlighting Tri-Mode Connection, DPI up to 12000, Custom Macro support, Battery Life up to 70h, 1000 Hz Polling Rate, 82g Lightweight design, 10 Million Clicks durability, and Ergonomic Design.

## 4. SETUP GUIDE

### 4.1. Keyboard Setup (AULA F75 Pro)

1. **Charging:** Connect the keyboard to a USB power source using the provided USB-C cable. The charging indicator will show status. A full charge provides extended wireless use.
2. **Connection Modes:** The F75 Pro supports three connection types. Use the switch on the keyboard to select your desired mode.
  - **2.4GHz Wireless:** Insert the 2.4GHz USB receiver into an available USB port on your computer. Switch the keyboard to 2.4G mode. The keyboard should connect automatically.
  - **Bluetooth 5.0:** Switch the keyboard to Bluetooth mode. Press and hold **FN + 1**, **FN + 2**, or **FN + 3** for 3 seconds to enter pairing mode (the indicator light will flash rapidly). On your device, search for 'AULA F75 Pro' and connect. You can pair up to three Bluetooth devices.
  - **USB-C Wired:** Connect the keyboard directly to your computer using the USB-C cable. Switch the keyboard to wired mode.
3. **Switching Devices:** For Bluetooth, press **FN + 1/2/3** to switch between paired devices. For 2.4GHz, ensure the receiver is connected and the keyboard is in 2.4G mode.



Image 4.1: The AULA F75 Pro Keyboard demonstrating its three connection modes: Bluetooth 5.0, 2.4GHz wireless, and USB-C wired, compatible with various devices like Switch, Xbox, PlayStation, PC, Laptop, Tablet, and Phone.

## 4.2. Mouse Setup (AULA SC580)

1. **Charging:** Connect the mouse to a USB power source using the provided USB-C cable. The indicator lights will show charging status.
2. **Connection Modes:** The SC580 mouse also supports three connection types, selectable via a switch on the bottom of the mouse.
  - **2.4GHz Wireless:** Insert the 2.4GHz USB receiver into an available USB port. Switch the mouse to 2.4G mode.
  - **Bluetooth 5.0:** Switch the mouse to Bluetooth mode (BT1 or BT2). Press and hold the pairing button (usually on the bottom) until the indicator flashes. On your device, search for 'AULA SC580' and connect. You can pair up to two Bluetooth devices.
  - **USB-C Wired:** Connect the mouse directly to your computer using the USB-C cable. Switch the mouse to wired mode.
3. **Switching Devices:** Use the switch on the bottom of the mouse to cycle between 2.4G, BT1, BT2, and wired modes.

# TRI-MODE GAMING MOUSE

2.4GHz wireless

BT5.0

Type-C Wired

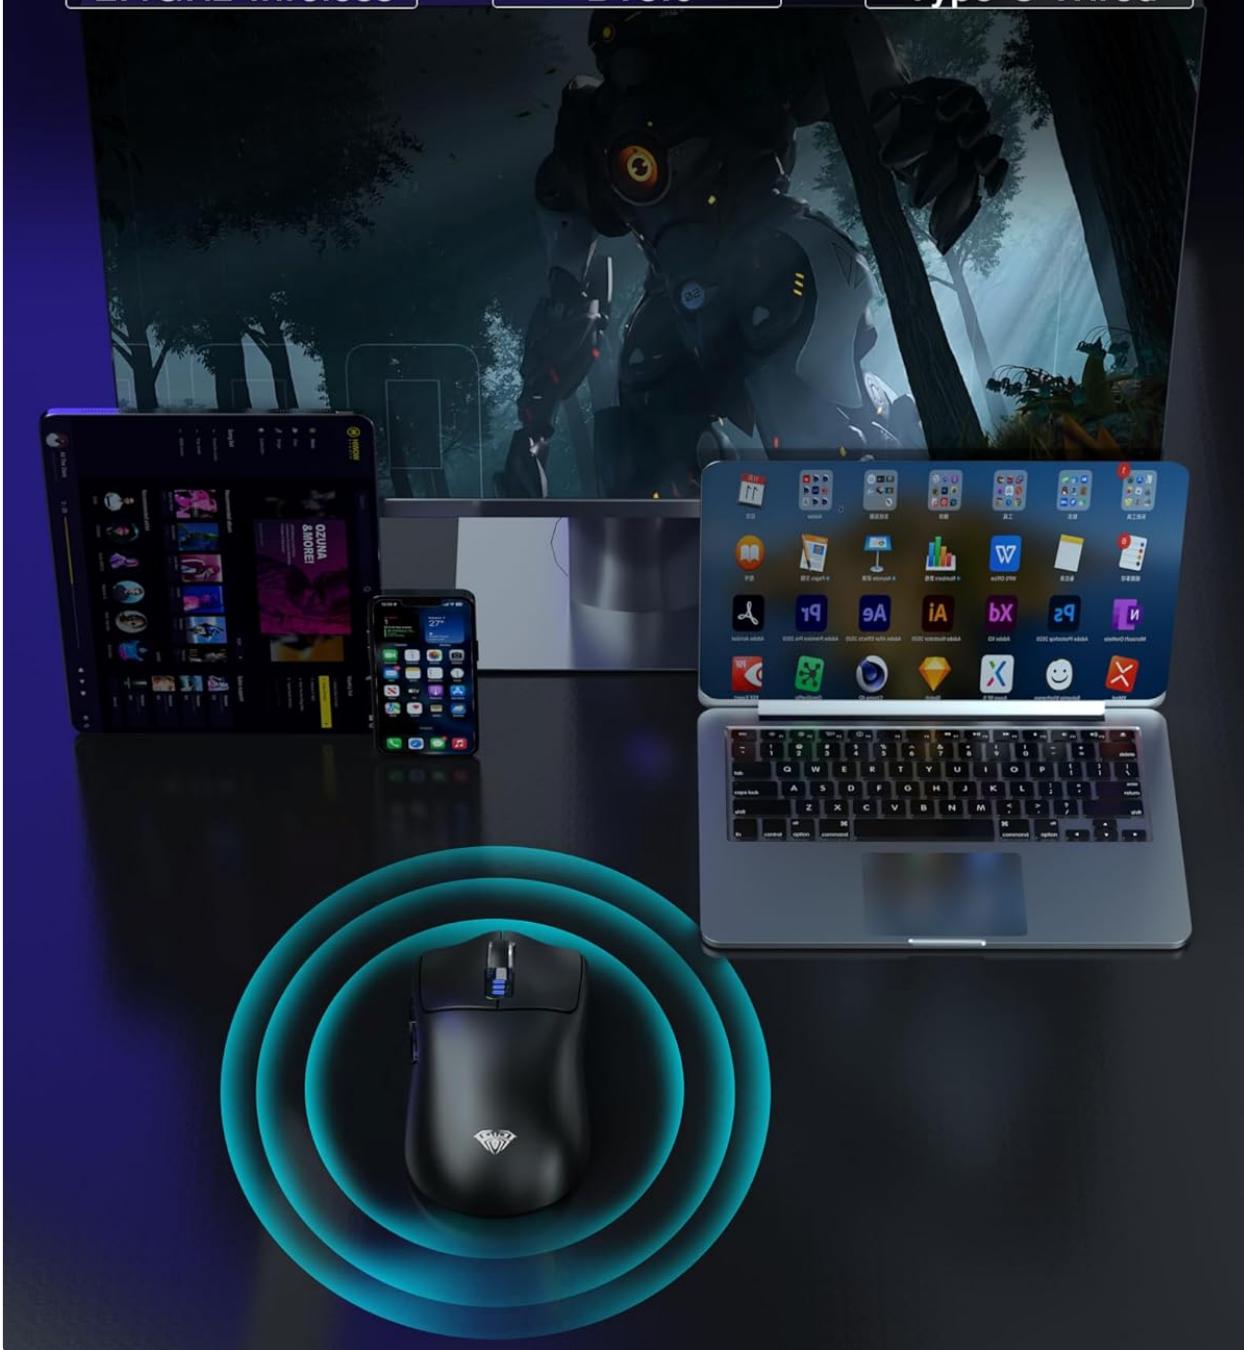


Image 4.2: The AULA SC580 Gaming Mouse illustrating its Tri-Mode connectivity: 2.4GHz wireless, BT5.0, and Type-C Wired, compatible with various computing devices.

## 5. OPERATING INSTRUCTIONS

### 5.1. Keyboard Functions (AULA F75 Pro)

- **Function Keys (F1-F12):** Access multimedia and system functions by pressing the **FN** key in combination with the F-keys. Refer to the keycap legends for specific functions.
- **Volume Knob:** Rotate the knob to adjust volume. Press the knob to mute/unmute audio.

- **RGB Lighting Control:**

- **FN + \ |:** Switch between 16 lighting effects or turn off the backlight.
- **FN + ↑ ↓:** Adjust lighting brightness.
- **FN + ← →:** Adjust lighting speed.

- **Hot-Swappable Switches:** The keyboard supports 3-pin or 5-pin switches. Use the provided switch puller to carefully remove existing switches and insert new ones. Ensure switches are aligned correctly before pressing them into place.

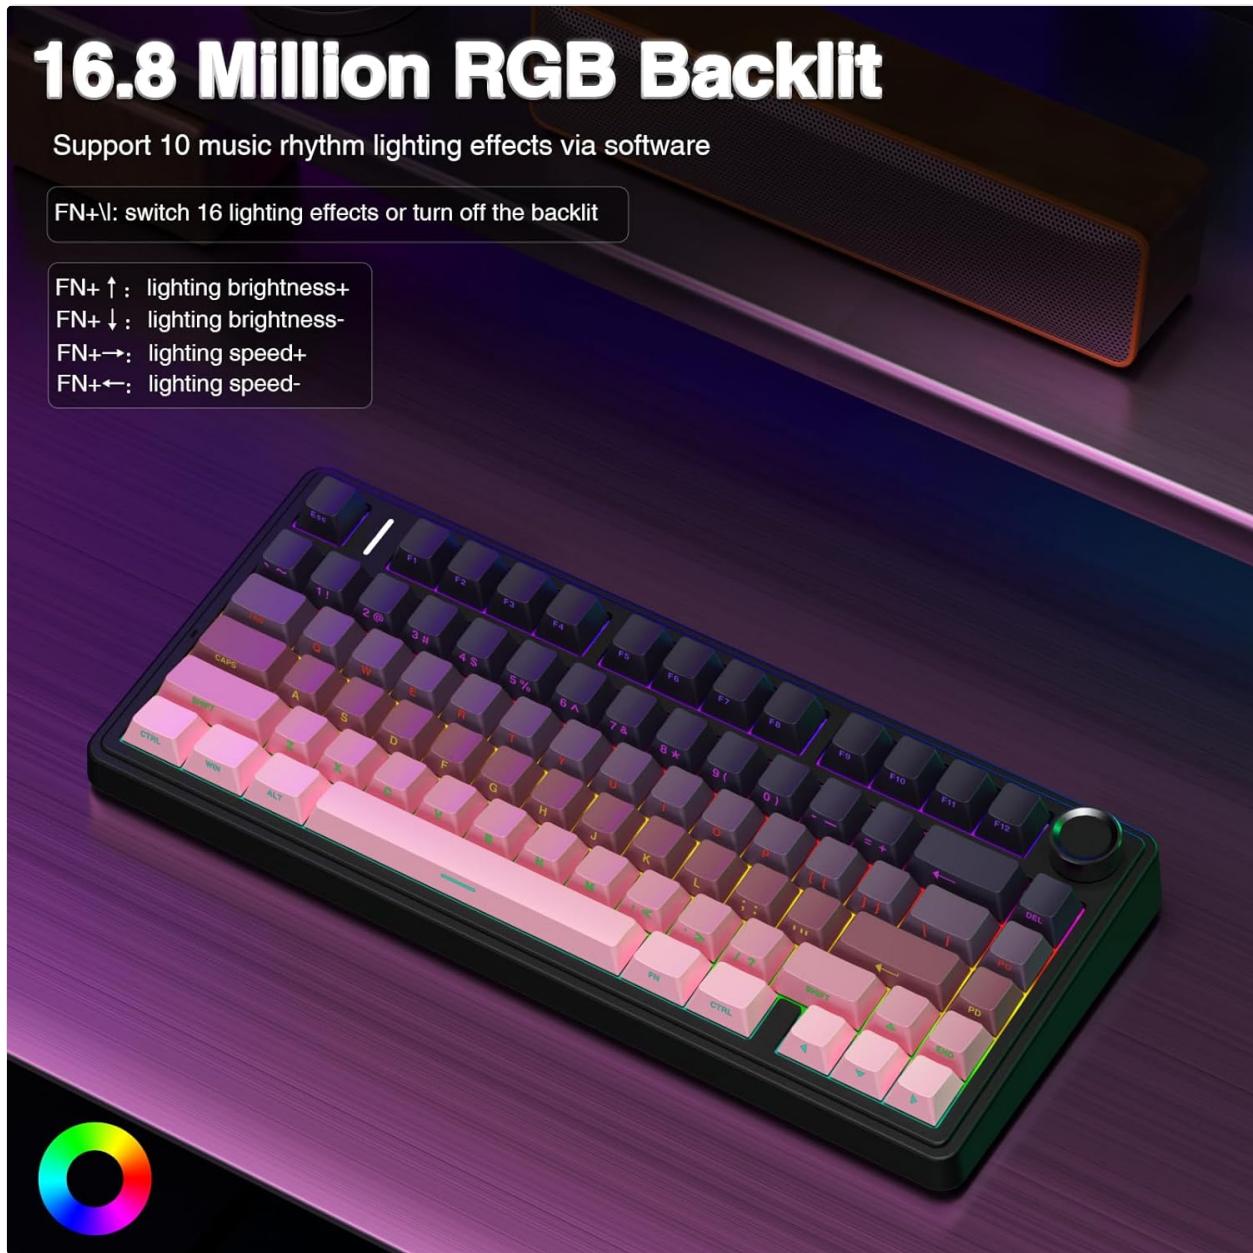


Image 5.1: The AULA F75 Pro Keyboard showcasing its 16.8 Million RGB Backlit feature and controls for adjusting lighting effects, brightness, and speed using FN key combinations.

## 5.2. Mouse Functions (AULA SC580)

- **DPI Adjustment:** Press the DPI button (usually located behind the scroll wheel) to cycle through preset DPI levels (800/1600/2400/3200/6400/12,000).
- **Programmable Buttons:** The mouse features multiple buttons that can be customized using dedicated software (if available from AULA's official website).
- **Polling Rate:** The mouse operates at a 1000Hz polling rate for responsive tracking.



# 6 ADJUSTABLE DPI MAX TO 12000

Users can set different DPI by the DPI button or custom software

800-1600-2400-3200-6400-12000

Image 5.2: The AULA SC580 Mouse illustrating its 6 adjustable DPI levels, ranging from 800 to 12000, which can be set via the DPI button or custom software.

## 6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the surfaces of the keyboard and mouse. For deeper cleaning, dampen the cloth slightly with water or a mild cleaning solution. Avoid excessive moisture.
- **Keycap Cleaning (Keyboard):** Use the provided keycap puller to remove keycaps for thorough cleaning. Clean keycaps with mild soap and water, then dry completely before reattaching.
- **Battery Care:** To prolong battery life, avoid fully discharging the devices frequently. Store in a cool, dry

place when not in use for extended periods.

- **Storage:** Store the devices in a clean, dust-free environment.

## 7. TROUBLESHOOTING

### 7.1. Keyboard Troubleshooting

- **Keyboard not responding:** Ensure the keyboard is charged. Check the connection mode switch (2.4G, BT, Wired) matches your setup. For 2.4G, ensure the receiver is properly inserted. For Bluetooth, re-pair the device. For wired, check the USB-C cable connection.
- **Keys not working:** If specific keys are not responding, ensure the switches are properly seated. If hot-swapped, try re-inserting or replacing the switch.
- **RGB lighting issues:** Ensure the keyboard is powered on. Use **FN + \** to cycle through effects or turn on the backlight. Adjust brightness with **FN + ↑ ↓**.

### 7.2. Mouse Troubleshooting

- **Mouse not responding:** Ensure the mouse is charged. Check the connection mode switch on the bottom. For 2.4G, ensure the receiver is properly inserted. For Bluetooth, re-pair the device. For wired, check the USB-C cable connection.
- **Cursor erratic or not moving:** Clean the optical sensor on the bottom of the mouse. Ensure you are using the mouse on a suitable surface.
- **DPI not changing:** Press the DPI button firmly. If using custom software, ensure settings are applied correctly.

## 8. SPECIFICATIONS

### 8.1. AULA F75 Pro Wireless Mechanical Keyboard

- **Connectivity:** USB-C Wired, 2.4GHz Wireless, Bluetooth 5.0
- **Layout:** 75% with Knob
- **Structure:** Gasket Structure
- **Switches:** Hot-Swappable (3-pin/5-pin compatible), Pre-lubricated LEOBOG Reaper switches
- **Keycaps:** Side-engraved PBT
- **Backlight:** RGB (16.8 Million colors, multiple effects)
- **Battery:** 4000mAh rechargeable
- **Compatible Devices:** PC, Laptop, Tablet, Smartphone, Gaming Console (PS, XBOX)

### 8.2. AULA SC580 Wireless Gaming Mouse

- **Connectivity:** USB-C Wired, 2.4GHz Wireless, Bluetooth 5.0 (BT1, BT2)
- **DPI Levels:** 800/1600/2400/3200/6400/12,000 (Adjustable)
- **Polling Rate:** 1000Hz
- **Buttons:** Programmable
- **Battery Life:** Up to 70 hours (approximate)

- **Weight:** 82g (Lightweight)
- **Durability:** 10 Million Clicks
- **Design:** Ergonomic
- **Compatible Systems:** Windows 7/8/10/XP/Vista, Mac OS, Linux, Android


## 9. WARRANTY AND SUPPORT

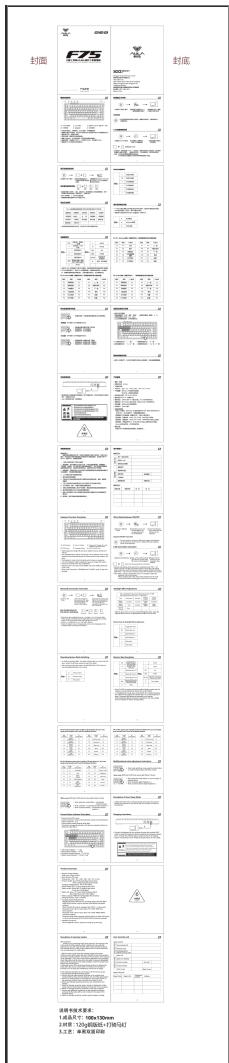
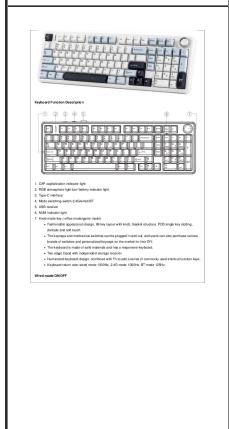
AULA products are designed for reliability and performance. For warranty information, please refer to the warranty card included with your purchase or visit the official AULA website. If you encounter any issues not covered in this manual, please contact AULA customer support for assistance.

**AULA Customer Support:** Please visit [AULA's official store page on Amazon](#) or their official website for contact details and further support resources.

© 2025 AULA. All rights reserved.

### Related Documents - F75 Pro / SC580 Combo

	<p><a href="#">AULA WIND F75: 3-in-1 Hot-Swappable RGB Gasket Mechanical Keyboard User Manual</a></p> <p>Explore the features and specifications of the AULA WIND F75, a versatile 3-in-1 mechanical keyboard. This manual covers its hot-swappable switches, gasket structure, RGB lighting, connectivity options, and user guide.</p>
	<p><a href="#">AULA F75 Mechanical Keyboard User Manual</a></p> <p>Discover the features and operating instructions for the AULA F75 3-in-1 Hot-Swappable RGB Gasket Mechanical Keyboard. This manual covers connectivity, functions, specifications, and troubleshooting.</p>
	<p><a href="#">AULA F75 Mechanical Keyboard User Manual and Connection Guide</a></p> <p>Comprehensive guide to the AULA F75 mechanical keyboard, covering its features, wired mode, ON/OFF instructions, and 2.4G wireless connection setup with manual code pairing.</p>
	<p><a href="#">AULA F75 Keyboard: Features, Wired, and 2.4G Connection Guide</a></p> <p>Detailed guide to the AULA F75 keyboard, covering its features, hot-swappable design, multi-mode connectivity (2.4GHz, Bluetooth, Wired), and instructions for wired and 2.4G connection setup.</p>

	<p><a href="#">AULA F75 Mechanical Keyboard User Manual: Setup, Features, and Specifications</a></p> <p>Comprehensive user manual for the AULA F75 three-mode mechanical keyboard. Learn how to connect via wired, 2.4G, or Bluetooth, customize backlighting, and understand product specifications and warranty.</p>
	<p><a href="#">AULA F99 Pro Mechanical Keyboard User Manual and Guide</a></p> <p>Comprehensive user guide for the AULA F99 Pro mechanical keyboard. Details include its 99-key layout, gasket structure, hot-swappable switches, multiple connectivity modes (Wired, 2.4G, Bluetooth), RGB lighting customization, system mode switching, and detailed product specifications.</p>