



GRACO GRCOM-103t Digital Audio Monitor with Temperature Read Out User Manual

Home » Graco » GRACO GRCOM-103t Digital Audio Monitor with Temperature Read Out User Manual





DIGITAL AUDIO MONITOR WITH TEMPERATURE READOUT





User's Manual Item: GRCOM-103t


Contents

- 1 Introduction
- 2 Package Contents
- 3 Other Functions for Parent Audio
- **4 FCC Statement**
- **5 Sakar One Year Warranty**
- 6 Documents / Resources
- **7 Related Posts**

Introduction


Thank you for purchasing the Graco Digital Audio Monitors, item GRCOM-103t. The multi-feature monitor allows parents/guardians to keep close surveillance of their baby during the day and throughout the night. Please read this manual carefully before setting up and using the digital audio monitors. And for future reference, keep this manual in a secure location.

Package Contents

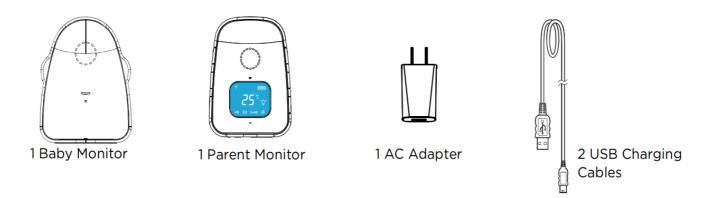

WARNING: Keep all contents out of reach from children and infants as this may lead to choking or strangulation.

Using the Baby Audio Monitor

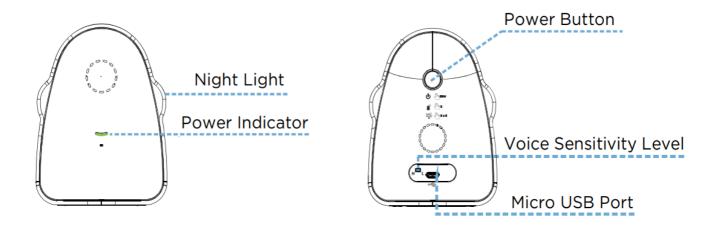


Powering ON: Using the included USB cable, connect the cable's USB end to the included wall adapter and the cable's Micro USB end to the audio monitor's Micro USB port. The Power Indicator will illuminate green indicating the power is ON.

Power:

- 1. Press and hold the Power button for two seconds to turn the camera ON/OFF.
- 2. Press the Power button to page the Parent Audio Monitor.
- 3. Press the Power button three times to turn the night light ON/OFF.

Using the Parent Audio Monitor

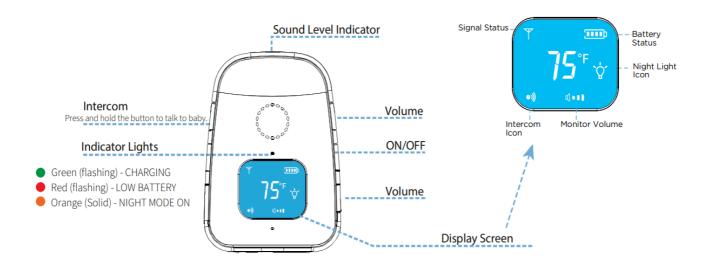


Charging the monitor: Using the included Micro USB cable, connect the USB end to the wall adapter and the Micro USB end to the monitor.

Note: When the battery is low, the Indicator light will flash red and the monitor will beep.

Power:

- 1. Press and hold the Power button for two seconds to turn the monitor ON/ OFF.
- 2. To turn the night light ON/OFF, press the Power button.
- 3. To reset 'night mode' press the Power button three times.

Other Functions for Parent Audio Monitor

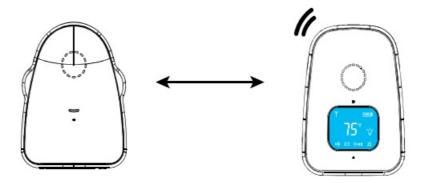

Distance: When the audio monitors are out of range from one another, the Parent Monitor will beep every 30 seconds. The Indicator light on the monitor will flash red and green to indicate the monitor(s) are out of range.

Temperature: The Parent Monitor reads the temperature of the room and displays it on the screen. If the room's temperature gets higher than 86°F and lower than 61°F, the monitor will beep every thirty seconds.

You can turn off the temperature alarm by pressing and holding the 'Volume ' button for five seconds on the Parent monitor. The monitor will beep once indicating the alarm is ON and beep twice indicating the alarm is OFF.

Night Mode: On the Parent Monitor press the Power button three times to put the monitors in night mode. In night mode, the Light Indicator will illuminate orange and the distance alarm will be turned OFF.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Sakar One Year Warranty

This warranty covers the original consumer purchaser only and is not transferable.

This warranty covers products that fail to function properly UNDER NORMAL USAGE, due to defects in material or workmanship. Your product will be repaired or replaced at no charge for parts or labor for a period of one year.

What Is Not Covered by Warranty

Damages or malfunctions not resulting from defects in material or workmanship and damages or malfunctions from other than normal use, including but limited to, repair by unauthorized parties, tampering, modification or accident.

To Obtain Warranty Service and Troubleshooting Information:

Call 1-877-397-8200 or visit our website at www.sakar.com.

To receive a Warranty service along with the name and address of an authorized product service center, the original consumer purchaser must contact us for problem determination and service procedures. Proof of purchase in the form of a bill of sale or receipted invoice, evidencing that the product is within the applicable warranty period(s), MUST be presented in order to obtain the requested service. It is your responsibility to properly package and send any defective products along with a dated copy of proof of purchase, a written explanation of the problem, and a valid return address to the authorized service center at your expense. Do not include any other items or accessories with the defective product. Any products received by the authorized service center that is not covered by warranty will be returned unrepaired.



©2020 Sakar International 195 Carter Drive Edison, NJ 08817 Support: 800 592 9541 www.vivitar.com

Documents / Resources



GRACO GRCOM-103t Digital Audio Monitor with Temperature Read Out [pdf] User Manual GRCOM-103T-A, GRCOM103TA, RS5-GRCOM-103T-A, RS5GRCOM103TA, GRCOM-103T-B, GRCOM103TB, RS5-GRCOM-103T-B, RS5GRCOM103TB, GRCOM-103t, Digital Audio Monitor with Temperature Read Out

Manuals+,