



GREATHTEK B0CGXDRQHV HDMI KVM Switch 2 Monitors 2 Computers User Manual

[Home](#) » [GREATHTEK](#) » GREATHTEK B0CGXDRQHV HDMI KVM Switch 2 Monitors 2 Computers User Manual 



B0CGXDRQHV HDMI KVM Switch 2 Monitors 2 Computers User Manual

Contents

- [1 Warm Tips](#)
- [2 Description](#)
- [3 Featureds](#)
- [4 Package list](#)
- [5 Specifications](#)
- [6 Panel](#)
- [7 Diagram](#)
- [8 Warranty](#)
- [9 Documents / Resources](#)

Warm Tips

1. Please keep this manual in a safe and conspicuous place for easy reference when needed.
2. If you encounter any problems when using the product, please contact us so that we can provide you with friendly after-sales support.

Description


HDMI KVM switch two groups of high-definition Audio and video source and USB interface implementation free switch, Adaptive EDID, can adapt to a variety of complex application environments. The equipment has excellent image processing and transmission capacity, make the output signal more smooth and steady, it is a reliable, high

performance and efficient way of HDMI USB switch.

Features

- 2 ports KVM switch HDMI, 2CH HDMI and USB HID signals synchronize switch;
- Support HDMI 2.0, HDCP 2.2 standards;
- Support USB2.0 and USB 3.0 protocol;
- Support HDMI dual display (this function is only available on computers that support dual display)
- Support video resolution max up to 3840*2160@60Hz;
- Built-in automatic adjustment system, make the image smooth, clear and stable;
- Simple to install, plug and play.

Package list

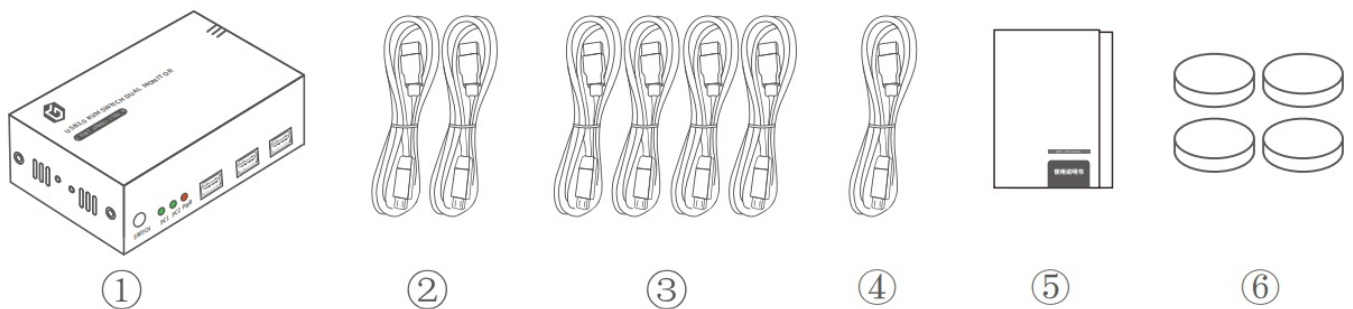


1. HDMI KVM 2*1 Switcher Host 1 pcs
2. USB3.0 A-A Cable Pcs
3. HDMI 2.0 Cable 4 pcs
4. Micro USB Cable 1 pcs
5. User manual+Warranty Card 1 pcs
6. Foot Pad 4 pcs

Specifications


Perametar		Description
Video	Standards	HDMI 2.0
	Maximum pixel clock	340MHz
	Maximum data rate	18Gbps
	Maximum resolution	3840*2160@60Hz, Backward compatible
	Connector	HDMI-A Interface
	Impedance	100Ω
	HDMI Cable Range	<5M(Resolution: 1920*1080@60Hz)
USB	Interface protocols	USB2.0+USB3.0
	PC input interface type	USB-A
	Output interface type	USB-A
Other	Power supply	5V power supply
	Power dissipation	MAX 2.5W
	Temperature	Operating: -5°C ~ +70°C
	Humidity	Operating: 5% ~ 90%
	Dimension	130*76*26.5mm
	The warranty	1 year free warranty

Panel

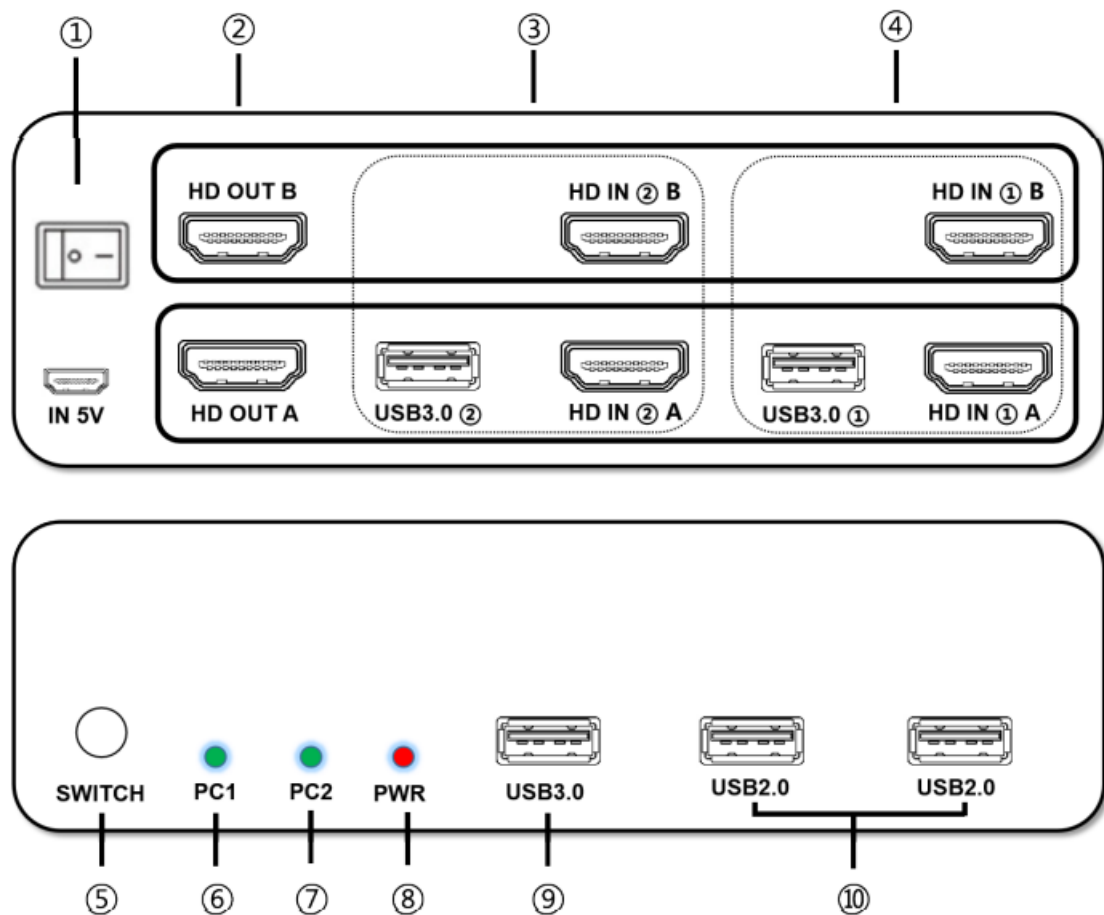

Port name	Description
1	Machine power switch, 5V power supply input port
2	HDMI video output signal
3,4	PC2. PC1 group HDMI USB input
5	PC1, PC2 switch buttons
6	PC1, PC2 status indicators
7,8	Power indicators
9	USB3.0 device input
10	USB2.0 device input

Diagram

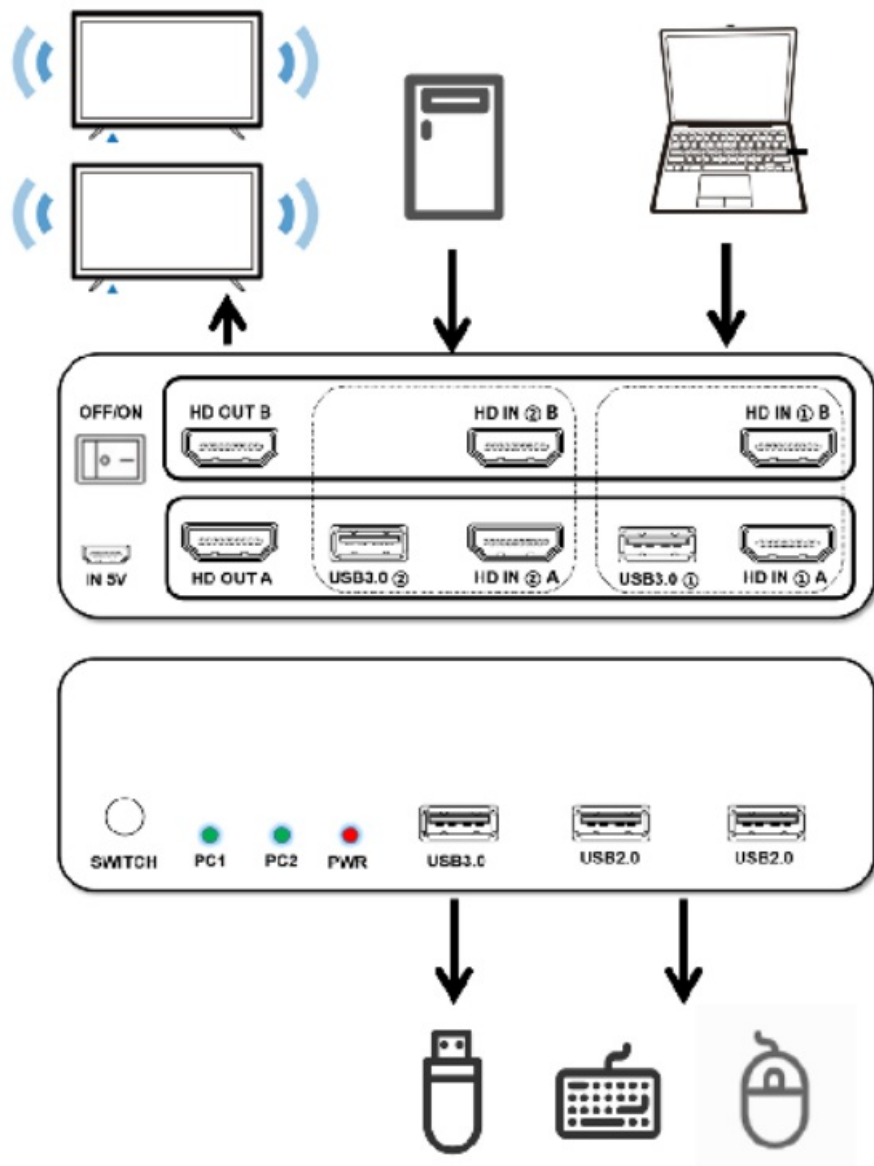


Warranty

Please keep the user manual in a place where safety and easy to find so that you can read it immediately when meet problems. safety instruction:

Safety instruction

- Please do not disassemble this product by yourself because it doesn't including DIY function;
- Please don't make the product touch water in case damaged, because it is Not waterproof design;
- Please use dry cloth material when clean the product surface;
- Please do not use this product in the environment of too wet or too high temperature;
- Please avoid contact with corrosive substances;
- When there is damage or other physical damage to the product, please stop using and contact with customer service to get support.



	GREATHT B0CGXDRQHV HDMI KVM Switch 2 Monitors 2 Computers [pdf] User Manual B0CGXDRQHV HDMI KVM Switch 2 Monitors 2 Computers, B0CGXDRQHV, HDMI KVM Switch 2 Monitors 2 Computers, KVM Switch 2 Monitors 2 Computers, Switch 2 Monitors 2 Computers, 2 Monitors 2 Computers, Monitors 2 Computers, 2 Computers
---	---