



[Manuals.plus](#) /

› [ALL FORTUNE](#) /

› ALL FORTUNE Solar Outdoor Chandelier (Model OP-68231-SO) User Manual

## ALL FORTUNE OP-68231-SO

# ALL FORTUNE Solar Outdoor Chandelier User Manual

Model: OP-68231-SO

## 1. INTRODUCTION

Thank you for choosing the ALL FORTUNE Solar Outdoor Chandelier. This 6-light, 19-inch dimmable hanging pendant light is designed to provide elegant and efficient lighting for your outdoor spaces such as gazebos, porches, patios, and pergolas. Featuring solar power, waterproof construction, and adjustable brightness, this chandelier offers both functionality and farmhouse-inspired aesthetics. Please read this manual carefully before installation and use to ensure proper operation and longevity of your product.

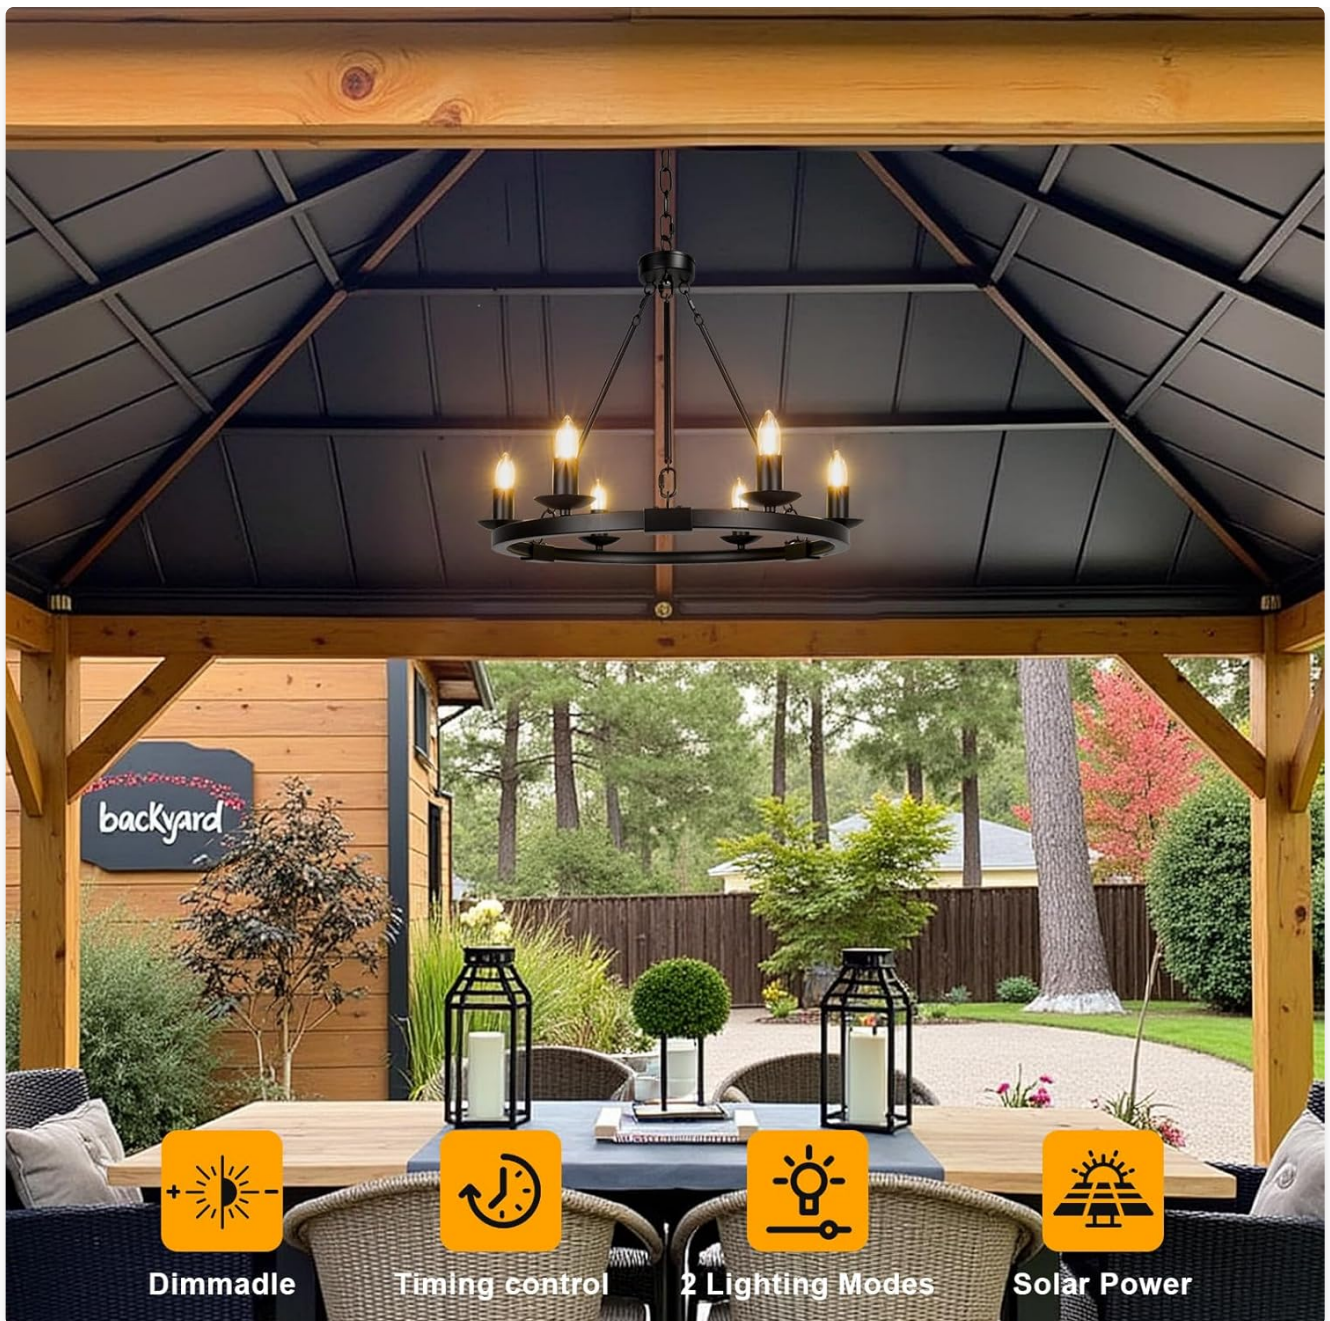


Image: The ALL FORTUNE Solar Outdoor Chandelier elegantly suspended within a gazebo, illustrating its key features: dimmable lighting, timing control, two distinct lighting modes, and solar power capability.

## 2. SAFETY INFORMATION

---

- Ensure all components are securely fastened before use.
- Do not attempt to modify or disassemble the product, as this may void the warranty and pose safety risks.
- Keep the solar panel clean and free from obstructions to ensure optimal charging.
- This product is designed for outdoor use and is waterproof (IP65 rated), but avoid submerging it in water.
- Handle bulbs with care. Extra bulbs are included for replacement.
- Keep out of reach of children.

## 3. PACKAGE CONTENTS

---

Verify that all items are present in the package:

- Chandelier frame with 6 light sockets
- Solar panel with mounting bracket
- Connecting cable (16 ft)
- 6 x E12 C9 Candle-Like Plastic Bulbs (plus extra bulbs)
- Remote control
- Type-C charging cable
- Chain for hanging (32 inches)
- Gazebo hooks
- User Manual

## 4. SETUP AND INSTALLATION

---


Follow these steps to assemble and install your solar outdoor chandelier:

1. **Assemble the Chandelier Frame:** Connect the chandelier components as shown in the diagram. Ensure all connections are rugged and secure.
2. **Install Bulbs:** Carefully screw the E12 C9 candle-like plastic bulbs into each of the 6 sockets on the chandelier frame.
3. **Connect Wires:** Connect the wires from the chandelier to the solar panel cable. Ensure that wires of the same color are connected together securely.
4. **Adjust Height:** Use the provided chain and gazebo hooks to adjust the hanging height of the chandelier to your desired level. The chain is 32 inches long, allowing for flexible height adjustment.
5. **Mount Solar Panel:** Choose a location for the solar panel that receives direct sunlight for at least 6-8 hours daily. Mount the solar panel using its bracket, ensuring it is angled for maximum sun exposure. The connecting cable is 16 feet long, providing flexibility for panel placement.
6. **Hang Chandelier:** Securely hang the assembled chandelier in your desired outdoor location (gazebo, porch, patio, pergola) using the provided hooks and chain.

# Product Details Showcase



**01** Connect Same Color Wires

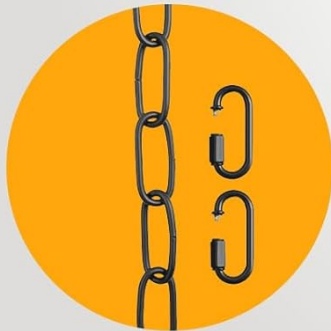

**02** Easy Height Adjustment



**03** Easy to Assemble Rugged Connections



**04** Candle-Like Plastic Bulbs× 8

Image: A visual guide to assembling the chandelier, detailing how to connect wires, adjust height, secure connections, and install the candle-like bulbs.

## 5. OPERATING INSTRUCTIONS

Your ALL FORTUNE Solar Outdoor Chandelier is designed for convenient and efficient operation.

### 5.1 Charging

- **Solar Charging:** The integrated solar panel charges the internal 3600mAh battery during the day. Ensure the solar panel is placed in direct sunlight for optimal charging.
- **Type-C Charging:** For faster charging or during periods of low sunlight, you can use the provided Type-C cable to charge the chandelier.

### 5.2 Automatic Operation

- **Dusk-to-Dawn Sensor:** The chandelier features an automatic sensor that turns the lights on at dusk and off at dawn, conserving battery life and providing hassle-free operation.

### 5.3 Manual Control and Features

Use the included remote control to access additional functions:

- **Manual ON/OFF:** Override the automatic sensor to turn the lights on or off at any time using the remote control.
- **Adjustable Brightness:** The chandelier offers 4 levels of adjustable brightness (25%, 50%, 75%, 100%) to create the perfect ambiance for any occasion. Use the brightness buttons on the remote to cycle through these settings.
- **Timer Function:** Set a timer for the lights to turn off automatically after a specified duration. Refer to the remote control's specific buttons for timer settings.
- **2 Lighting Modes:** Select between different lighting modes (details may vary, refer to remote for specific options).



Image: The chandelier demonstrating its manual ON/OFF capability, dual charging options (solar and Type-C), and automatic activation at dusk.



## 4 Levels of Adjustable Brightness

Create the Perfect Atmosphere for Any Occasion

Brightness 25%

Brightness 50%

Brightness 75%

Brightness 100%



Image: Visual representation of the chandelier's 4 levels of adjustable brightness, from 25% to 100%, allowing users to customize the lighting atmosphere.

## 6. MAINTENANCE

- **Cleaning:** Regularly wipe the solar panel and chandelier with a soft, damp cloth to remove dust and debris. Do not use harsh chemicals or abrasive cleaners.
- **Battery Care:** The internal battery is designed for long-term use. If the light output diminishes significantly, ensure the solar panel is receiving adequate sunlight or use the Type-C charging option.
- **Bulb Replacement:** If a bulb fails, replace it with an E12 C9 candle-like plastic bulb. Extra bulbs are provided.
- **Weather Protection:** While the chandelier is IP65 waterproof, windproof, snowproof, and sunproof, extreme weather conditions may affect performance. Ensure secure mounting during strong winds.

## All-Weather Durability

Durable and Reliable in Any Condition

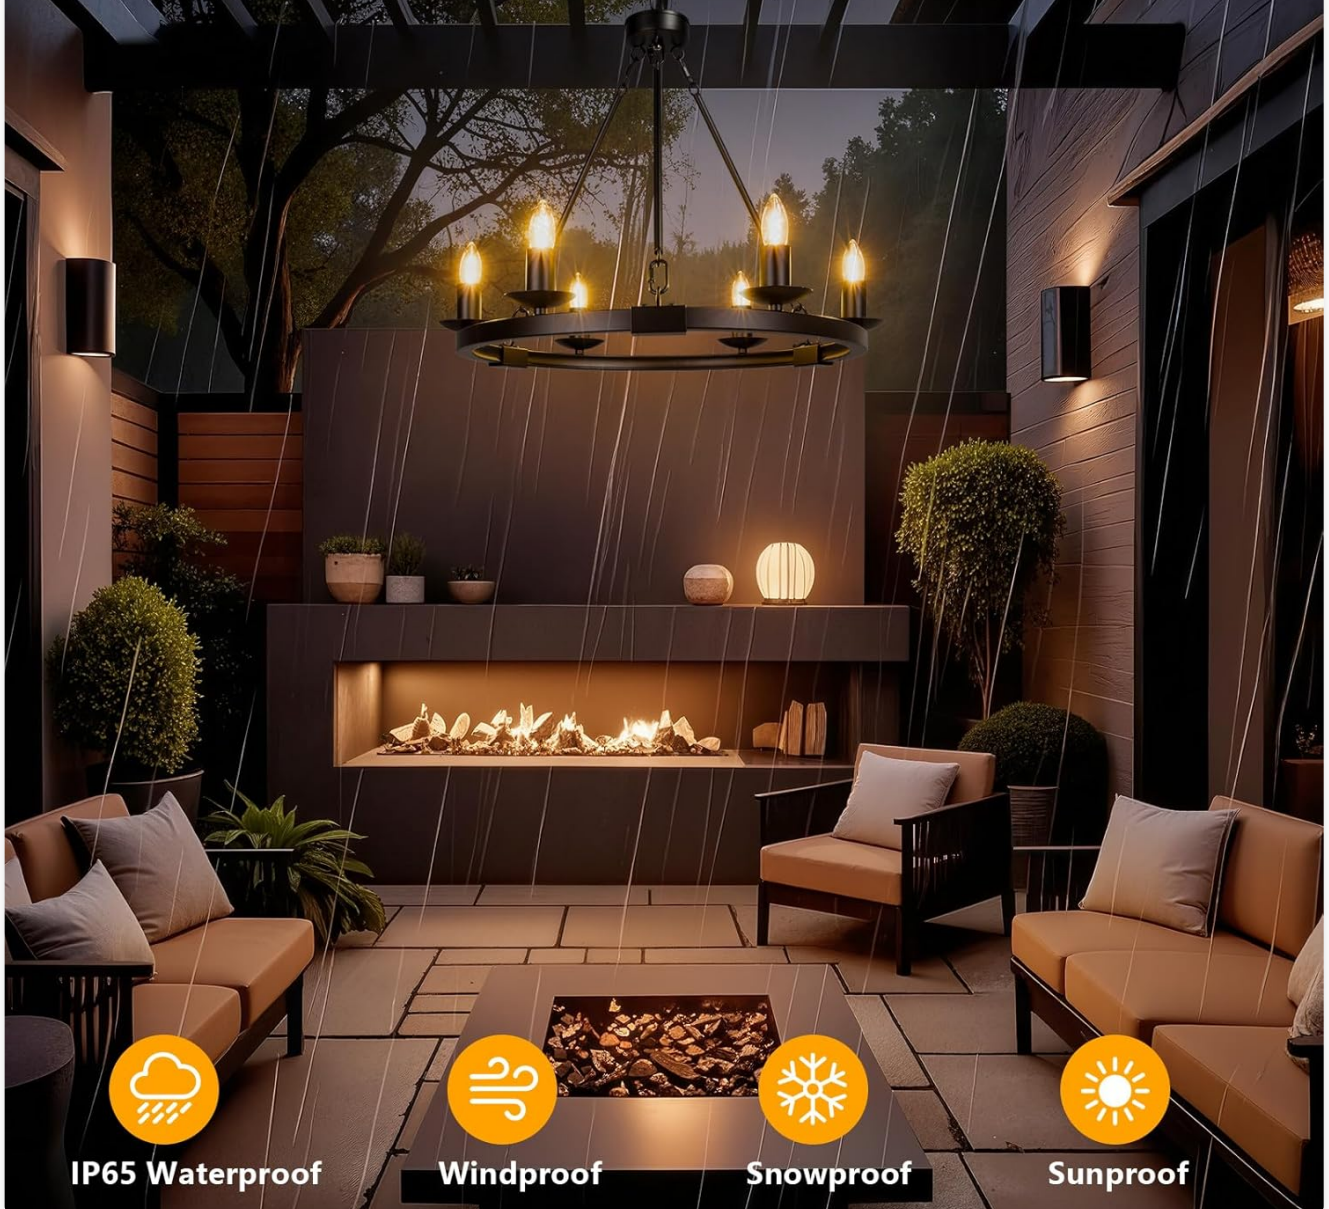


Image: The chandelier enduring various weather conditions, emphasizing its all-weather durability with IP65 waterproof, windproof, snowproof, and sunproof features.

## 7. TROUBLESHOOTING

### • Light does not turn on at night:

- Ensure the solar panel is clean and receiving direct sunlight for at least 6-8 hours.
- Check if the power switch is in the 'ON' position.
- Verify that the battery is charged (use Type-C charging if necessary).
- Confirm all wire connections are secure.

### • Light is dim or flickers:

- The battery may be low. Allow more time for solar charging or use Type-C charging.
- Ensure the solar panel is not obstructed.
- Check for loose bulb connections.

- **Remote control not working:**

- Ensure the remote control has working batteries (2\*AAA batteries, not included).
- Point the remote directly at the chandelier's receiver.

## 8. SPECIFICATIONS

Feature	Detail
Model Number	OP-68231-SO
Bulb Type	E12 C9 (Included)
Material	Metal
Shade Color	Black
Voltage	3.7V
Max Lumens	500 LM
Battery Capacity	3600mAh
Working Time	8H-10H (fully charged)
Product Dimensions	48.3L x 48.3W x 121.9H Centimetres (19" x 19" x 48")
Item Weight	2.72 kg
Water Resistance Level	IP65 Waterproof
Light Color	Warm White (2700 Kelvin)
Control Method	Touch, Hand Control (Remote)
Special Features	Adjustable Height, Dimmable, No Wiring, Solar Power, Type-C Charging

# PRODUCT PARAMETERS

The diagram illustrates the product's physical dimensions and components. The main product is a black, three-arm hanging light fixture with a circular base and six E12 C9 bulbs. The dimensions are: 16Ft for the chain length, 32in for the height from the top of the chain to the top of the light fixture, 18in for the height from the top of the light fixture to the bottom of the base, and 18.5in for the diameter of the base. Components shown include a solar panel with a 3600mAh battery, a remote control, and a Type-C rechargeable cable. Two AAA batteries are noted as not included. Two inset images show the 'Gazebo Hook' used for hanging the fixture.

**16Ft**

**32in**

**18in**

**18.5in**

**3600mAh**

**Type-c Rechargeable**

**2\*AAA batteries Not included**

**Gazebo Hook**

**Gazebo Hook**

Specifications	
Bulb Type:	<b>E12 C9 (Included)</b>
Material:	<b>Metal</b>
Shade Color:	<b>Beige</b>
Voltage:	<b>3.7V</b>
Max lumens:	<b>500 LM</b>
Battery:	<b>3600mAh</b>
Working Time:	<b>8H-10H</b>

Image: A comprehensive overview of the product's physical dimensions, components like the solar panel and remote, and a detailed table of technical specifications.

## 9. WARRANTY AND SUPPORT

ALL FORTUNE products are manufactured to high-quality standards. For warranty information or technical support, please refer to the contact details provided with your purchase or visit the ALL FORTUNE official website. Please retain your proof of purchase for any warranty claims.