



GROWONIX GX 200 High Flow Reverse Osmosis System



GROWONIX GX 200 High Flow Reverse Osmosis System Instruction Manual

[Home](#) » [GROWONIX](#) » GROWONIX GX 200 High Flow Reverse Osmosis System Instruction Manual 

Contents

- [1 GROWONIX GX 200 High Flow Reverse Osmosis System](#)
- [2 Product Information](#)
- [3 CHECK CONTENTS](#)
- [4 CONNECT THE RO/PERMEATE & DRAIN TUBING](#)
- [5 FLUSHING THE CARBON FILTER](#)
- [6 CONNECT THE INLET WATER SUPPLY](#)
- [7 QUICK CONNECT FITTINGS](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



GROWONIX GX 200 High Flow Reverse Osmosis System




Product Information

Specifications

- GX 200 / GX 150 Series
- Includes: Garden Hose Adapter, Filter Wrench, Drain Clamp, 1/4 Ball Valve, Tubing, Instruction Manual

CHECK CONTENTS

- A. Garden Hose Adapter
- B. Filter Wrench
- C. Drain Clamp
- D. 1/4" Ball Valve
- E. Tubing
- F. Instruction Manual

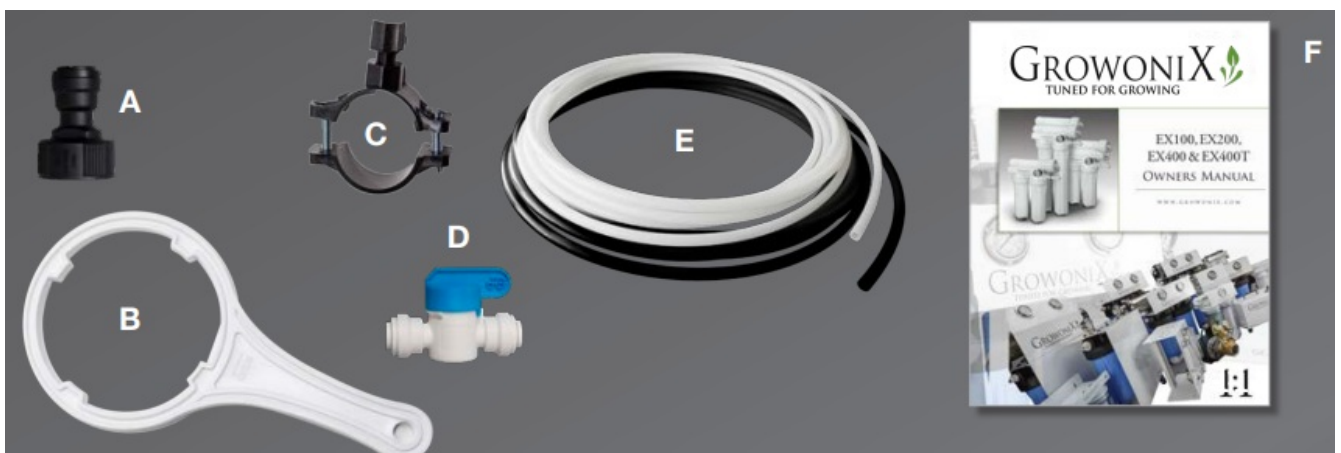

CONNECT THE RO/PERMEATE & DRAIN TUBING

- Connect the white tubing to the auto shutoff valve (ASV)—this is the RO product or permeate water. Connect the other end to a storage tank or reservoir. Make sure tubing length does not exceed 20', otherwise added

back pressure will increase the system ratio.

If longer length is needed, the tubing should be upsized.

- Connect the black tubing to the flow restrictor—this is the drain water. Connect other end of drain tubing to included drain clamp. Make sure tubing length does not exceed 20', otherwise added back pressure will decrease the system ratio. If longer length is needed, the tubing should be upsized.

Make sure the flush valve is open.

- A 1/4" drain clamp is included with the system. Mount the drain clamp to an available drain pipe or simple drain.



FLUSHING THE CARBON FILTER

- It is essential to always flush the pre-filters (sediment & carbon) thoroughly before connecting to the membrane element.
- KDF carbon filters, especially, need to be flushed upon initial use and every time the RO system is moved.
- Carbon fines can cause premature failure of the membrane element. The only way to avoid this is through flushing the carbon filter.




- Point this tubing down into a bucket or drain, and slowly turn on the incoming water supply. Carbon dust will start pouring out. Flush KDF carbon filters for at least 10 gallons.

- After the carbon is flushed, turn off incoming water supply, and connect the tubing to the membrane input, making sure tubing is properly seated.

CONNECT THE INLET WATER SUPPLY


- 3/4" and 1" CTS tubing can be used as well. This example shows 3/4" garden hose connected to the supplied hose union.
- If using a garden hose make sure the inner diameter of the hose is between 3/4" and 1", and the total length of the hose does not exceed 20'. Otherwise too much pressure drop will occur and the system will not perform correctly.

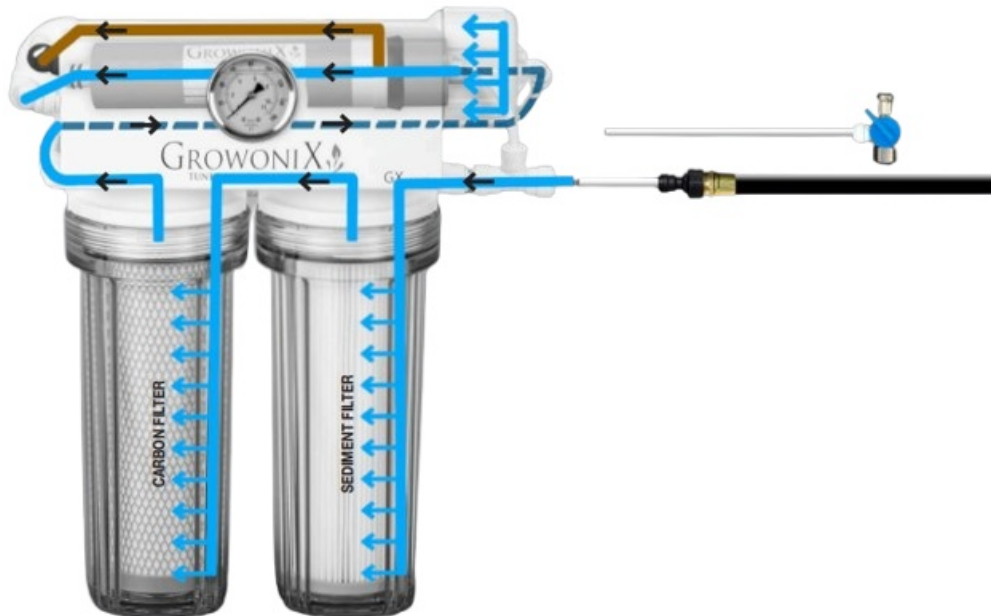

QUICK CONNECT FITTINGS

INSERT TUBE INTO FITTING

Push the tubing through the collet and dual o-rings until it bottoms out against the tube stop. The collet holds the tube in place and the dual o-rings provide a leak resistant seal.

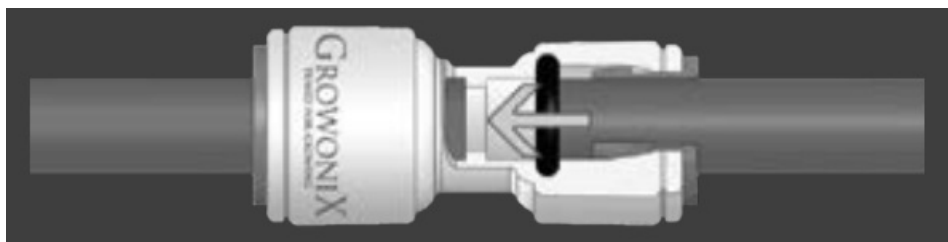

TUBE REMOVAL

Relieve pressure from the tubing and fitting. Push uniformly around the collet flange against the fitting body while pulling the tubing away from the fitting to release it.



CONGRATULATIONS

You have connected your Growonix product. Please follow the instructions below to get started

- A) Make sure the flush valve is open STEP (3).
- B) Turn on incoming water pressure slowly, allowing all the air to purge from the system. When air bubbles cease to be seen in either the RO (white) or drain (black) tubing, the air is purged.
- C) Allow membrane to flush for at least 30 minutes prior to use.
- D) After membrane is flushed, close the flush valve to allow for normal water production.
- E) Enjoy!



FAQ

Q: Why is it important to flush the carbon filter?

A: Flushing the carbon filter is crucial to prevent carbon fines from causing premature failure of the membrane element.

Q: How long should I allow the membrane to flush before use?

A: Allow the membrane to flush for at least 30 minutes before normal water production.

Documents / Resources



[GROWONIX GX 200 High Flow Reverse Osmosis System](#) [pdf] Instruction Manual
GX 200, GX 150, GX 200 High Flow Reverse Osmosis System, High Flow Reverse Osmosis System, Reverse Osmosis System, Osmosis System

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.