



hager EE883 Hyper Frequency Motion Detector Owner's Manual

[Home](#) » [hager](#) » [hager EE883 Hyper Frequency Motion Detector Owner's Manual](#) 

Contents

- [1 hager EE883 Hyper Frequency Motion Detector](#)
- [2 Features EE883](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)



hager EE883 Hyper Frequency Motion Detector



Hyper Frequency Motion Detector

The hyper frequency EE883 motion detector is applicable for wall and ceiling installations because of its practical two screw mounting system and it allows for a detection coverage of 360° without any dead angles. The detection range diameter is adjustable within 1 to 8 metres. The hyper frequency (HF) detection is independent of the temperature detection, which can detect movement through partitions (drywall, wood and glass).


Features EE883

- 230V AC
- IP54
- Detection zone of 8m
- Detection area 360°



Description EE883: Circulation sensor HF 360°, IP54, wall mounted, white.


Accessories EEK006

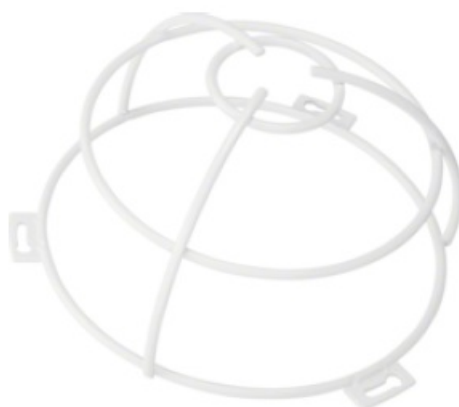

Description: Sensor Protection Basket EEK006.

Data is subject to errors and technical modifications. Prices are trade price, exclusive of VAT. Date: 26.10.2022
Path: Controls > Motion Detectors > Hyper Frequency Motion Detector.

Documents / Resources

	<p>hager EE883 Hyper Frequency Motion Detector [pdf] Owner's Manual EE883, Hyper Frequency Motion Detector, EE883 Hyper Frequency Motion Detector, Frequency Motion Detector, Motion Detector, Detector</p>
---	---