



# HAM RemoteAC WiFi Air Conditioner Control and Temperature Humidity Sensor Instruction Manual

[Home](#) » [HAM](#) » HAM RemoteAC WiFi Air Conditioner Control and Temperature Humidity Sensor Instruction Manual 

## Contents

- [1 HAM RemoteAC WiFi Air Conditioner Control and Temperature Humidity Sensor](#)
- [2 TROUBLESHOOTING](#)
- [3 PRODUCT DESCRIPTION](#)
- [4 PRODUCT FEATURES](#)
- [5 SETUP](#)
- [6 SAFETY WARNINGS](#)
- [7 USAGE](#)
- [8 TECHNICAL SPECIFICATIONS](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)



**HAM RemoteAC WiFi Air Conditioner Control and Temperature Humidity Sensor**



## **TROUBLESHOOTING**

The Status LED is not lit and the device is shown as disconnected on the app


### **This means that the device is not connected to the Cloud**

- Make sure that the device gets power Check your Internet connection. If you cannot access the Internet with a different device on the same Wi-Fi network check your router or with your ISP
- Check that the server is accessible at <https://hamsystems.eu> with your browser. If it is not, check again in 5 minutes or refresh the app / webpage Try restarting the device by disconnecting and reconnecting power. Wait for a few minutes
- Check if the device is connected to your Wi-Fi router / Access Point. If the device does not appear to be connected, then repeat the setup procedure and make sure that the Wi-Fi name and password are correct. The device may also need to be whitelisted depending on your network configuration. Note that the device and the app use the ports 9001 and 9002

### **The Air-Conditioner does not respond to commands**

- Make sure that the device is powered
- Make sure that the device is connected to the cloud. The Status LED should be fully on.
- Make sure you have setup the correct codeset from the device settings
- Check that your air-conditioner has power, by using the original remote control.

## **PRODUCT DESCRIPTION**

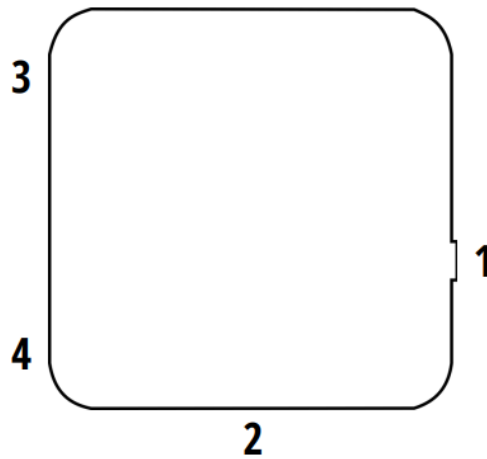

1. Setup Button
2. microUSB power
3. Status LED
4. Temperature and Humidity sensor

## PRODUCT FEATURES

- Internet connection via Wi-Fi 2.4Ghz
- Control your Air-Conditioner via the Internet
- Android, iOS, Voice control with popular assistants
- Temperature and Humidity real-time and historical readings
- Time schedules
- Geofence support

## SETUP

In order to connect the device to your Wi-Fi network, you need to use the HAM Systems app. All the other features are also available on the Web on <https://hamsystems.eu>

1. Connect the device to power via microUSB.
2. Open the HAM Systems app. If you don't have an account create one
3. Click on (+) button on the devices list view on the app
4. Follow the instructions on the app
5. If the Status LED is fully on and the device does not appear on the app, then you may also need claim the device to your account. Click on (+) and select the Claim Device option
6. Click on the device on the list and select More
7. Scroll down to device settings and select your AC brand. If you can't find your brand, you can try the "Others" option at the bottom.
8. Find a codeset that works for your AC and click OK
9. You should now be able to control your AC on the app

In case you are having difficulties, you can try restarting the device by disconnecting and re-connecting power and repeating the steps.

If you want to change the Wi-Fi network of your device, you can do so by doing the steps 3-5 . You don't have

to re-claim your device in this case

## SAFETY WARNINGS

- Do not disassemble the device. Doing so, voids the warranty.
- In case of loss of network, you will not be able to control the device remotely.
- You should not rely on the device in such a way that puts human or animal lives at risk.

## USAGE

To use the device, visit our webapp at <https://hamsystems.eu> or search HAM Systems at the App Store / Play Store


### Some features of the app:

- Control your Air-Conditioner from anywhere in the world via the Internet
- Set up time based schedules and timers
- View real time and historical output state
- Create interactions between other HAM Systems devices by using IF this THEN that style rules
- Secured communications with TLS
- Organize your devices with groups and floorplans

## TECHNICAL SPECIFICATIONS

- **Enviromental conditions:** -10°C to 55°C, 0-90% RH
- **Input:** 5VDC, 2A from microUSB
- **Output:** IR
- **Measurements:** Temperature / Relative Humidity
- **Accuracy:**  $\pm 1$  °C,  $\pm 5\%$  RH
- **Dimensions:** 50.9mm x 50.9mm x 16.5mm
- **Connectivity:** Wi-Fi IEEE 802.11 b/g/n 2.4Ghz

## Documents / Resources

	<p><a href="#">HAM RemoteAC WiFi Air Conditioner Control and Temperature Humidity Sensor</a> [pdf] Inst ruction Manual</p> <p>RemoteAC, WiFi Air Conditioner Control and Temperature Humidity Sensor, RemoteAC WiFi Air Conditioner Control and Temperature Humidity Sensor, Air Conditioner Control and Temperat e Humidity Sensor, Temperature Humidity Sensor, Humidity Sensor, Sensor</p>
---	---

## References

-  [HAM Systems | Home Automation and More](#)