



hama 00200117 External 4 Port USB-C Hub USB Powered User Manual

[Home](#) » [Hama](#) » hama 00200117 External 4 Port USB-C Hub USB Powered User Manual 

hama

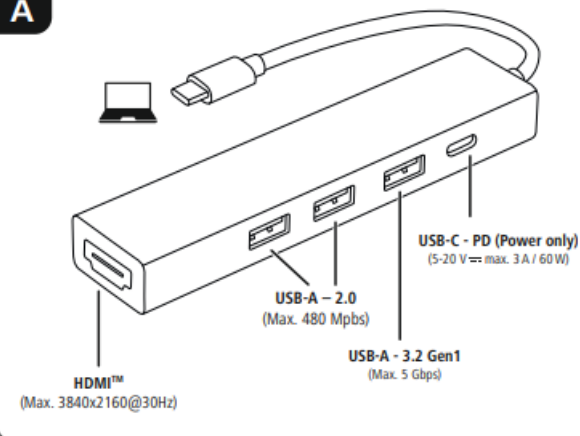
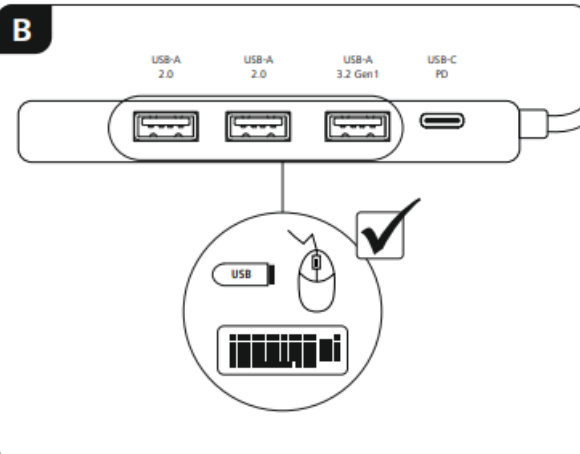
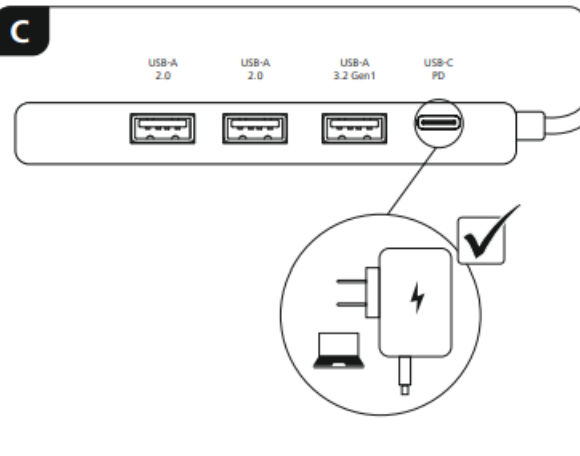
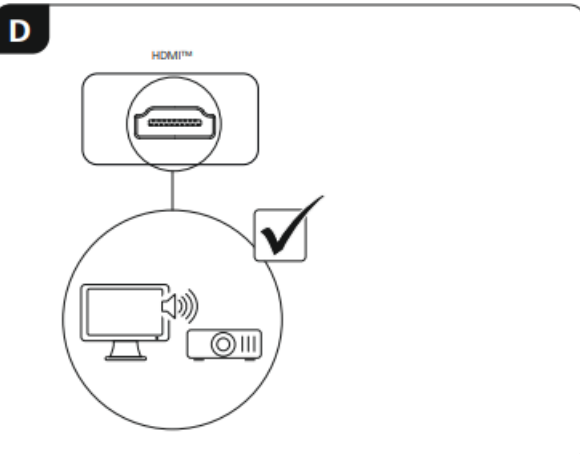
00 200117
USB Multiport
Operating Instructions



Contents

- [1 00200117 External 4 Port USB-C Hub USB Powered](#)
- [2 Package Contents](#)
- [3 Safety Notes](#)
- [4 Startup and Operation](#)
- [5 Warranty Disclaimer](#)
- [6 Technical Data](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

00200117 External 4 Port USB-C Hub USB Powered

A**B****C****D**

Package Contents

- USB-C Multiport
- These operating instructions

Safety Notes

- Do not attempt to service or repair the product yourself. Leave any and all service work to qualified experts.
- Do not open the device or continue to operate it if it becomes damaged.
- Do not operate the product outside the power limits given in the specifications.
- Do not modify the product in any way. Doing so voids the warranty.
- Keep this product, as all electrical products, out of the reach of children! Use the product for its intended purpose only.
- Protect the product from dirt, moisture and overheating, and only use it in a dry environment.
- The product is intended for indoor use only.
- Do not use the product in the immediate vicinity of heaters or other heat sources or in direct sunlight.
- Do not use the product in moist environments and avoid splashes.
- Do not use the product in areas where the use of electronic devices is not permitted.
- Do not drop the product and do not expose it to any major shocks.
- Dispose of packaging material immediately according to locally applicable regulations.



Warning

- Find out the maximum output current capacity of the USB port on your device. To do this, consult the operating instructions or ask the manufacturer.
- Common values are 500 mA for USB-A 2.0, 900 mA for USB-A 3.0, and up to 3000 mA for USB-C.
- Ensure that the cumulative current draw of all USB devices connected to the hub/multiport adaptor does not exceed this value.



Note

- Run USB receivers (radio / 2.4 GHz wireless) if possible directly on the computer / notebook.
- To be able to use the charging function, the device must support Power Delivery (PD) or Thunderbolt-3/4.
- To be able to use the HDMI™ function, the device must support DisplayPort Alternate Mode or Thunderbolt-3/4.
- For optimised video function, we recommend passive monitor adapters / cables (without chipset / signal converter).

Startup and Operation


- Switch on your computer and boot the system.

- Connect the product to a free USB port on your computer.
- You do not have to install drivers; the computer will automatically recognise the product.
- If necessary, follow the instructions for your operating system.
- In order to use your devices, plug them into the product one after the other.

Warranty Disclaimer

Hama GmbH & Co KG assumes no liability and provides no warranty for damage resulting from improper installation/mounting, improper use of the product or from failure to observe the operating instructions and/ or safety notes.

Technical Data

	
Operating voltage / current consumption	5 – 20 V max. 3 A
Compatibility	USB-C port
System requirements	Windows 11 / 10 / 8 / 7 Mac OS 10.8 ≥
USB specification	USB 3.2 Gen1

Note

- If there is interference or the product no longer responds, unplug the product, wait a few seconds and then plug it in again.

hama

HamaGmbH&CoKG
86652 Monheim/Germany
Service&Support



www.hama.com



+499091502-0



Raccolta Carta

**All listed brands are trademarks of the corresponding companies.
Errors and omissions excepted, and subject to technical changes.
Our general terms of delivery and payment are applied.**

00200117/11.22

Documents / Resources



[hama 00200117 External 4 Port USB-C Hub USB Powered](#) [pdf] User Manual
00200117 External 4 Port USB-C Hub USB Powered, 00200117, External 4 Port USB-C Hub U
SB Powered, USB-C Hub USB Powered, USB Powered

References

- [hama.com](#)