Haoliyuan SBLM04 Motion and Brightness Sensor Installation Guide

Know about the sensor

LED
Blinking: The device enters pairing mode

Off: The device is under standby status

Button
Press and hold the button for 5 seconds until the LED blinks, the device will enter pairing mode
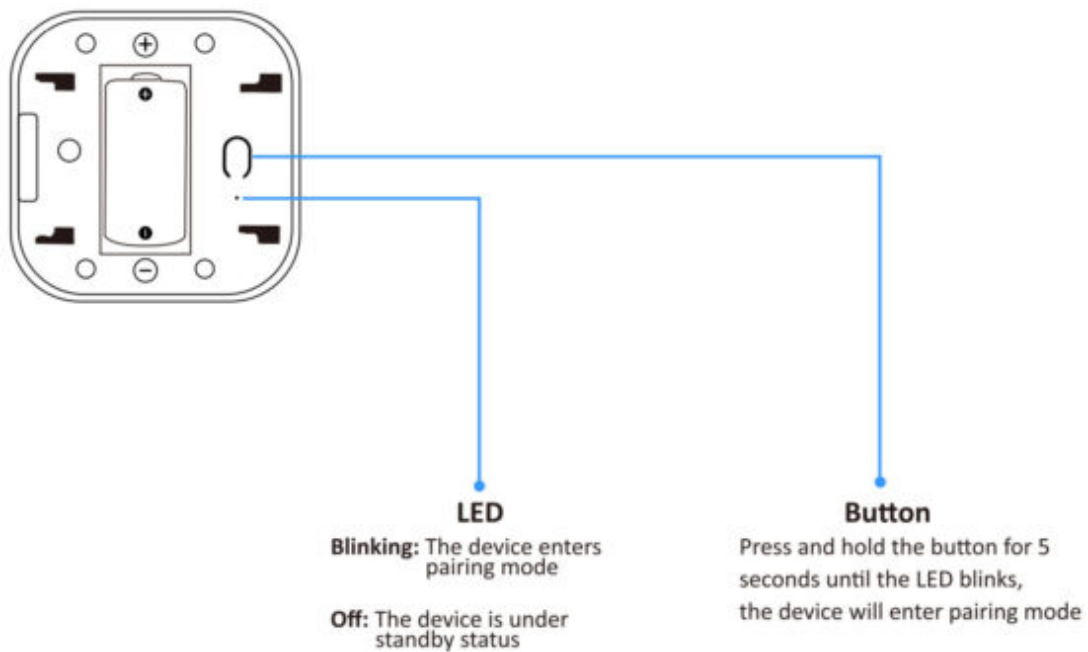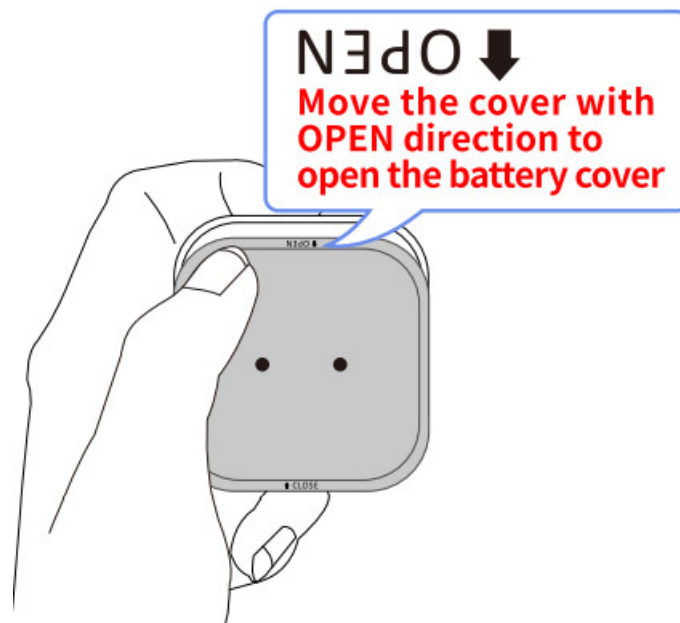
Quick Installation Guide
Note: The Smart Life app should be installed and registered an account first (Smart Life can be searched in APP Store or Google Play). Then make sure the Gateway is added and online before the next.
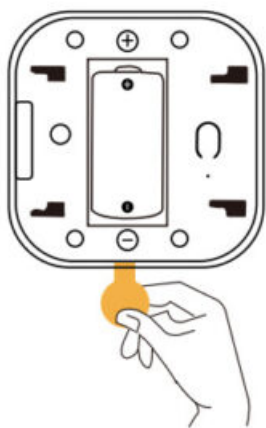
Contents

Power on the sensor

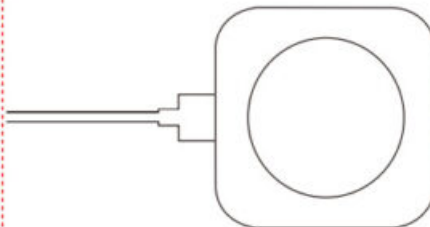1. Open the battery cover

OPEN ⬇
Move the cover with OPEN direction to open the battery cover
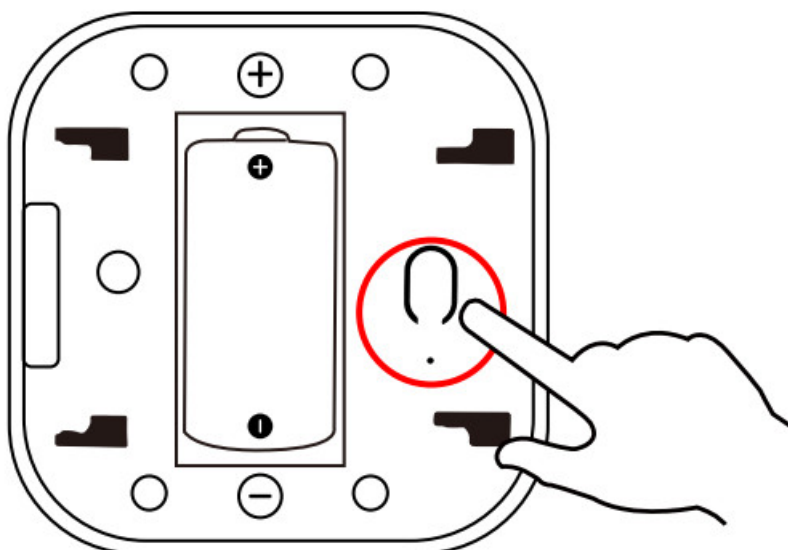
2. Remove the insulation sheet

Option:It also can be supplied by USB DC5V,at this time the battery will be saved.
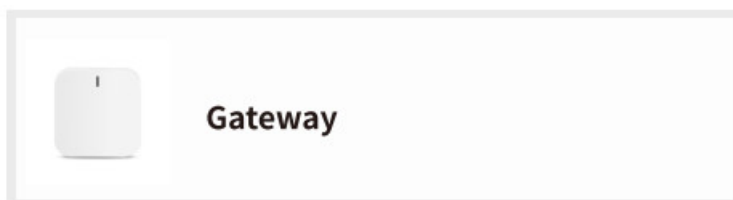
Make the device enter pairing mode

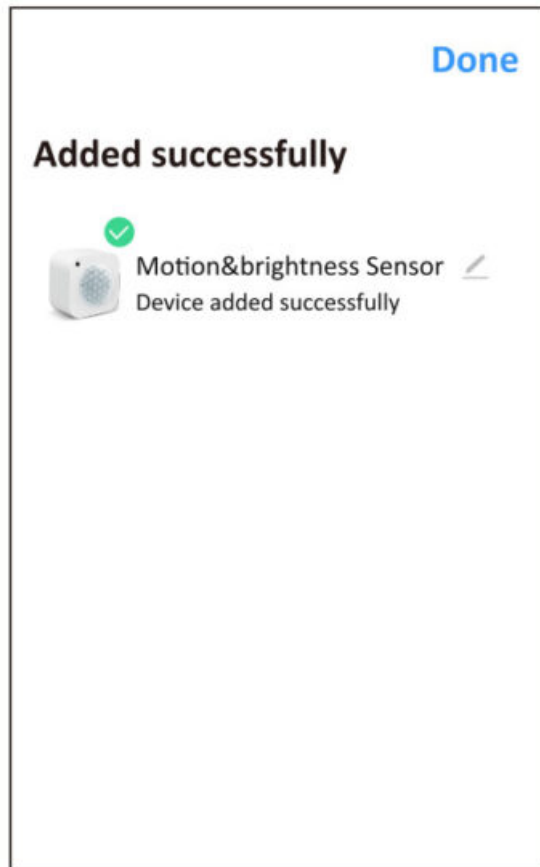Press and hold the button for 5 seconds until the LED blinks.

Device pairing

Open the "Smart Life" app, Enter the gateway homepage and click "Search new device" or "Add Devices" and follow the in-app instructions to connect the device to your gateway.
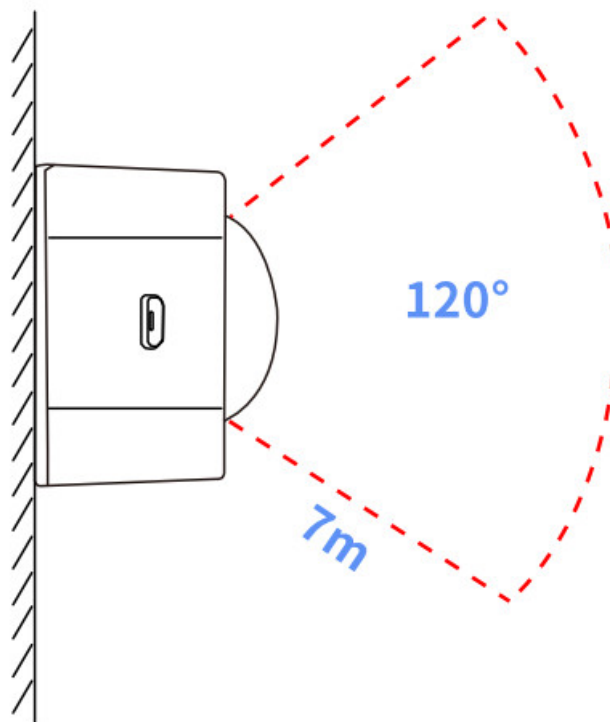

Gateway

Waiting for a few seconds, This device is added successfully and you may rename it. Click "Done" to finish the setting.
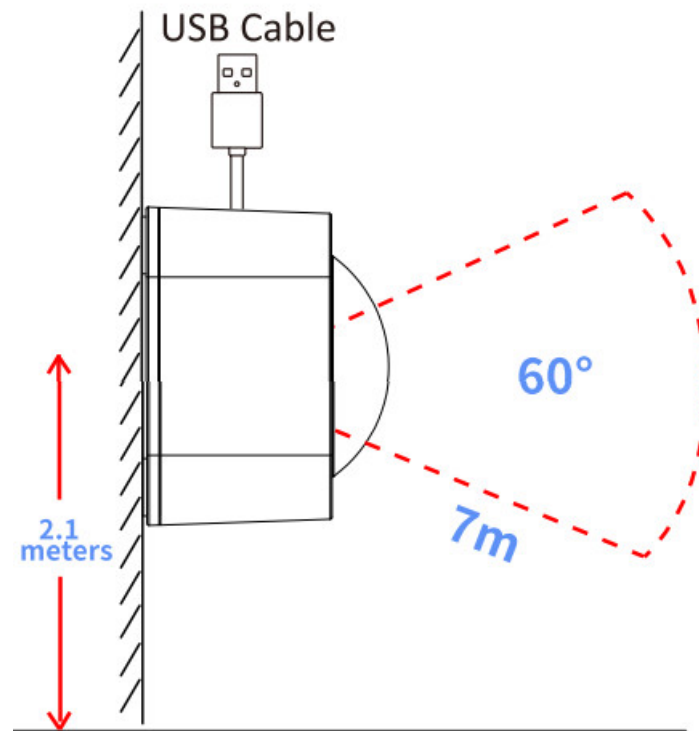
Device Installation

Close the battery cover then put it where you need it. For a good detection range, the installation height should be 1.82.1 meters. Please refer to the view below to find out the installation place you need.
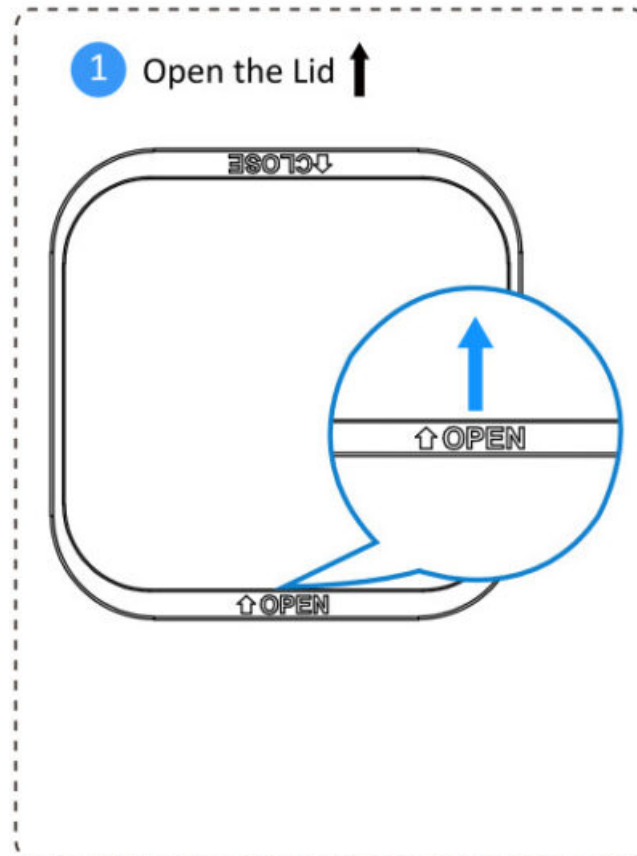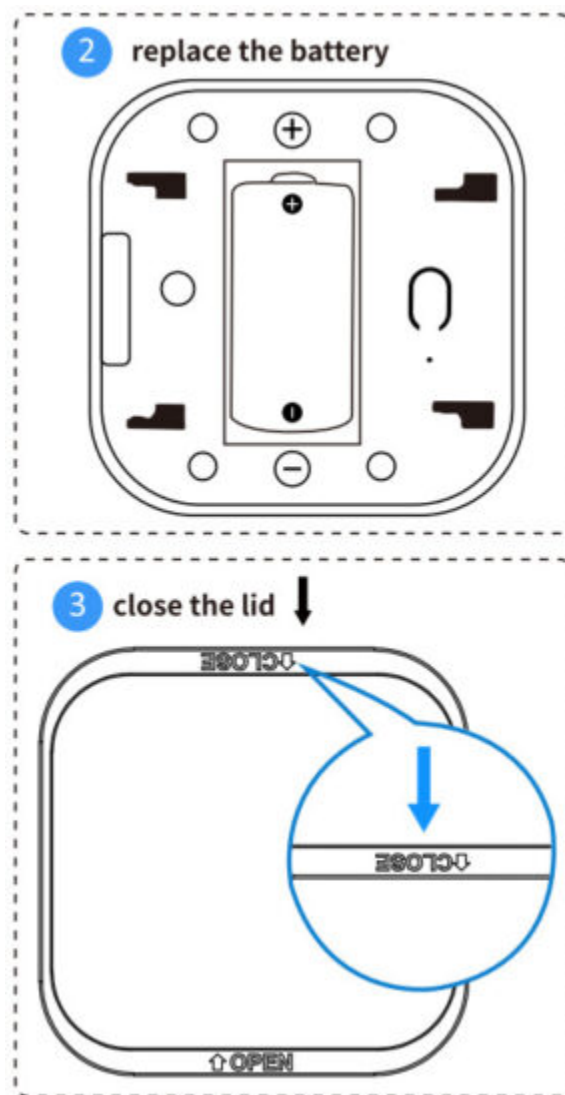
1. **Top view**

2. Side view

Battery Change

The sensor works with a replaceable CRI.: 3.0V battery. If you received the low bath alarm on the app, please replace the battery and ensure the new battery is installed in the right direction.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by the manufacturer could void your authority to operate this equipment.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information
The device has been evaluated to meet general RF exposure requirements. The device can be used in portable

exposure conditions without restriction.

Documents / Resources

	Haoliyuan SBLM04 Motion and Brightness Sensor [pdf] Installation Guide SBLM04, 2AUHL-SBLM04, 2AUHLSBLM04, SBLM04 Motion and Brightness Sensor, SBLM04, Motion and Brightness Sensor