




# HARDY PROCESS SOLUTIONS HI 4050+ Weight Controller Instructions

[Home](#) » [HARDY PROCESS SOLUTIONS](#) » HARDY PROCESS SOLUTIONS HI 4050+ Weight Controller Instructions 



Model HI 4050+  
Weight Controller



SILVER  
**Technology Partner**

A ROCKWELL AUTOMATION PARTNER

## Contents

[1 Applications](#)

[2 Features](#)

[3 SPECIFICATIONS](#)

[4 Documents /  
Resources](#)

[4.1 References](#)

[5 Related Posts](#)

## Applications

### PROCESS WEIGHING

- Batching/Blending
- Filling/Dispensing
- Level-by-Weight
- Check Weighing
- Rate Monitoring

## Features

### THE HARDY PROCESS TOOLBOX

The Hardy Process Toolbox is a set of productivity tools that delivers value across process weighing functions. Each tool saves time, increases accuracy, improves efficiency or reduces risk in your process weighing applications.



PROCESS TOOLBOX

**Electronic calibration without test weights**



**Weighing system monitoring, diagnostics and troubleshooting**



**Vibration immunity from mechanical noise**



## **Easy to configure and setup with a Rockwell Automation PLC Rockwell Add-on-Profile**

The HI 4050+ is a fast, high-resolution weight controller that helps to reduce your labor content, speed your production throughput, and improve the quality and safety of your end product. The HI 4050+ acts as a front end weight controller to a PLC, PC or DCS system. It also operates as a standalone weight controller or monitor.

### **FAST & STABLE WEIGHT READINGS**

With a selectable update rate of 100 or 250 updates per second, WAVERSAVER conditioning and Hardy's new WAVERSAVER+ patent pending adaptive filtering algorithms, the HI 4050+ displays accurate, stable rate readings fast. With a processed weight resolution of 1:30,000 and an addressable resolution of 1:100,000, the HI 4050+ is precise and accurate.

### **HIGHLY CONFIGURABLE**

Configure your HI 4050+ weight controller to suit your specific weighing application:

- With or without display
- Ether Net/IP, PROFINET, Device Net,  
ControlNet, Modbus TCP, Modbus RTU, Profibus, Remote I/O, or Analog Comms.
- Panel, DIN rail, remote or wall mount
- Either AC or DC power
- Weight by rate

### **EASY SET-UP**

Use the embedded Webserver to set up instrument parameters from anywhere on the Ethernet network. Setup is quick and easy with the front panel keys and LCD display. A Rockwell AddOn-Profile (AOP) makes it easy to configure with RSLogix.

### **EASE OF INSTALLATION**

Just drill or punch standard holes in your panel and attach the front panel keyboard display to the panel front. The weight controller housing can be attached to the rear of the panel, wall or remotely, up to 100 feet away. Or connect to a DIN rail. It can be mounted vertically, horizontally or offset to make use of available space.

### **SECURE MEMORY MODULE (SMM-SD)**

Hardy's rear panel accessible SMM is more than just a memory card – it uses a standard Secure Digital (SD) memory card. The card allows easy expansion, the transfer of data from one instrument to another, and is readable on your PC.

### **C2® ELECTRONIC CALIBRATION**

C2 enables electronic calibration of the weigh system without test weights. This saves system start-up costs and aggravation. Of course, even if C2 certified load sensors are not used, the system can still be calibrated the traditional way using certified test weights.


### **INTEGRATED TECHNICIAN®**

INTEGRATED TECHNICIAN, used in conjunction with an IT Junction Box, provides built-in system diagnostics that enable you to troubleshoot and diagnose your weighing system. You can read individual load sensor voltages and weights, make comparisons, and isolate individual system components for quick and easy troubleshooting even if those components are inaccessible.

## COMPONENTS TO COMPLETE YOUR HARDY SYSTEM

Hardy Bench Scales, Floor Scales and Load Points

Hardy carries a wide variety of strain gauge load points and scale bases to accommodate your application requirements.

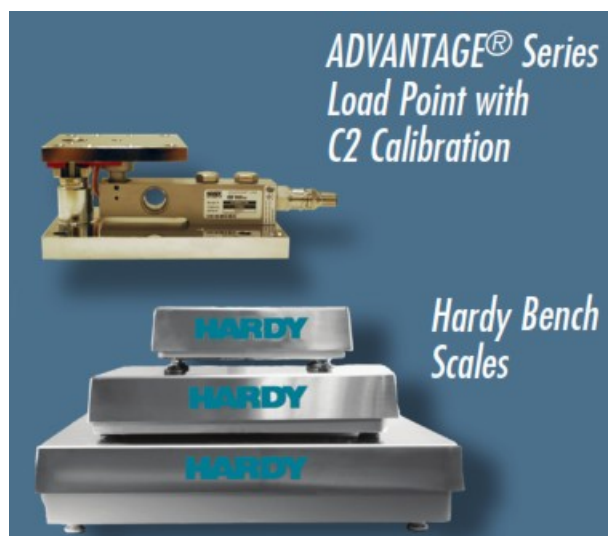

## Weighing Instruments Dedicated to Your Applications

Controllers, Weigh Modules, Transmitters





## SPECIFICATIONS

### Performance

#### Resolution

- Legal for Trade 1:10,000
- Stable Processed Weight 1:30,000
- Maximum Displayed Resolution 1:100,000

**Selectable Update Rate:** 110 or 250 times per second

#### Averaging

- Sliding up to 250 readings in single unit increments

**Display:** 64×128 LCD display with backlight

### Standard Interfaces

- Ethernet: 10/100base T; embedded web server
- Serial RS 232: simplex to printer or to remote scoreboard

### Stable Weight Reading

- WEVERSAVER ® 0.25Hz minimum to 7.5Hz maximum
- WEVERSAVER+ patent pending dynamic filtering improves stability of static weight readings by 3X

### Calibration Techniques

- C2 ® electronic calibration
- Traditional calibration with test weights

**Units of Measure:** Lb, lb/oz, oz, ton, kg, g, t

### Outputs:

- Four optional 5 to 24VDC (DIO)

### Mode

- Gross, net, available rate-of-change (ROC)

### Load Point Excitation

- 5VDC power drives up to eight 350-ohm load cells

### Digital Inputs

- Three mappable, non-isolated
- Three optional mappable, isolated (DIO)

### Power Requirement

- AC: 110-240VAC, 47-63Hz
- DC: 24VDC
- 10 watts max

### Operating Temperature

- HI4050-AC: -10° to +40°C (14° to 104°F)
- HI4050-DC: -10° to +60°C (14° to 140°F)

### Storage Temperature

- PM: -30° to +70°C (-22° to 158°F)
- DR: -40° to +85°C (-40° to 185°F)

### Enclosure

- For hazardous locations, recommend Type 4X/NEMA 4X call us: 800-821-5831
- Panel/remote mount
- DIN mount
- Stainless steel wall mount

### Approvals

- Intertek Hazardous Certification: Hazardous Class I, Division 2, Groups A,B,C,D, T4A and Class II, Division 2, Groups F, G, T4A, Class III, Division 1 and 2
- CE, NTEP, Canada Weights & Measures
- UL/CUL (ordinary locations)
- PROFINET (PI) & EtherNet/IP (ODVA)

### Compliance

- RoHS3 & REACH

### Dimensions

- Front panel: 4"h x 7"w x .725"d (101.6h x 177.8w x 18.4d mm)
- Housing: 2.98"h x 5.65"w x 3"d (75.7h x 143.5w x 76.2d mm)
- Wall mount: 11.50"h x 8.28"w x 5.54"d (292.1h x 210.3w x 140.6d mm) Warranty
- Two-year warranty against defects in workmanship

### HI 4050+ MODEL NUMBERS

<b>-PM</b>	Panel or remote mount
<b>-PMWS</b>	Stainless steel wall mount with display
<b>-DR</b>	DIN rail (blind)
<b>-DRWS</b>	Stainless steel blind wall mount
<b>-AC</b>	AC power
<b>-DC</b>	DC power


### NETWORK OPTIONS

-EIP	EtherNet/IP
-PFN	PROFINET : Two port with MRP (Media Redundancy Protocol)
-CN	ControlNet
-DN	DeviceNet
-4ANA/B	Four independent Analog out
-MD	Modbus TCP/IP
-PB	Profibus DP
-DIO	Digital I/O

**Visit our web site for:**

- Full product specifications
- Ordering information
- Application notes
- Firmware and software updates
- User Guide

[www.hardysolutions.com](http://www.hardysolutions.com)

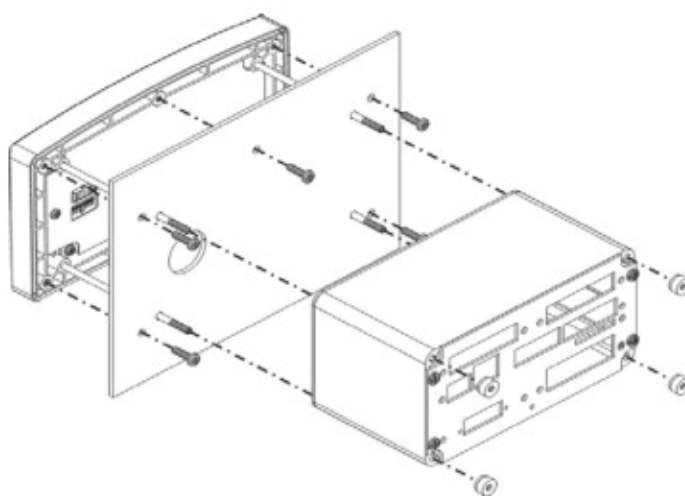

#### **Drill standard holes for easy, quick installation**

All information within is subject to change without notice. Visit our website for latest specifications.

WAVERSAVER, C2, IT, ADVANTAGE and ANY-WEIGH are registered trademarks of Hardy Process Solutions. All other trademarks or registered trademarks are the property of their respective owners.



10075 Mesa Rim Road San Diego, CA 92121  
tel. +1-858-278-2900


tel. 800-821-5831  
fax +1-858-278-6700  
[www.hardysolutions.com](http://www.hardysolutions.com)  
[hardyinfo@hardysolutions.com](mailto:hardyinfo@hardysolutions.com)



HI 4050+, 01170400-0007G  
0222

[www.hardysolutions.com](http://www.hardysolutions.com) • 800.821.5831

## Documents / Resources

	<p><a href="#">HARDY PROCESS SOLUTIONS HI 4050+ Weight Controller</a> [pdf] Instructions HI 4050 Weight Controller, HI 4050, Weight Controller, Controller</p>
--	--

## References

- [Hardy Process Solutions-Industrial Weighing Scales & Packaging | Hardy Process Solutions](#)

Manuals+.