



HAT DESIGN WORKS REYA POWER Standard Surface Power Module Under Mount Kit Owner's Manual

[Home](#) » [HAT Design Works](#) » HAT DESIGN WORKS REYA POWER Standard Surface Power Module Under Mount Kit Owner's Manual 

Contents

- [1 HAT DESIGN WORKS REYA POWER Standard Surface Power Module Under Mount Kit](#)
- [2 Specifications](#)
- [3 LOW PROFILE USB HUB](#)
- [4 STANDARD SURFACE POWER MODULE](#)
- [5 WIRELESS SURFACE POWER MODULE](#)
- [6 POWER STRIP](#)
- [7 DIMENSION](#)
- [8 Frequently Asked Questions](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



HAT DESIGN WORKS REYA POWER Standard Surface Power Module Under Mount Kit



Specifications

- **Input:** 125VAC, 60Hz, 15A max
- **Output:** AC Outlets (varies based on product)
- **USB Ports:** USB-A and USB-C ports with different charging capabilities
- **Dimensions:** Vary based on product
- **Part Numbers:** Vary based on product

Product Usage Instructions

REYA Power Low Profile USB Hub

The Low Profile USB Hub by REYA Power is a versatile device with the following features:

- 1 USB-A charger port
- 1 USB-C charger port
- Can charge a laptop up to 65 Watts (requires a 5a-rated USB-C cable)

To use the USB Hub

1. Connect the hub to a power source using the provided cord.
2. Plug your devices into the USB ports for charging.
3. Ensure the laptop meets the power requirements for safe charging.

SMART. BEAUTIFUL. POWERFUL.


Meet Reya – our new power family. Reya's design-forward architecture with soft, curved lines offers a full

spectrum of mountable power options for your workstation. Whatever your power needs, big or small, Reya provides power conveniently at your fingertips.

LOW PROFILE USB HUB



Finishes



Features

- 1 USB-A charger port
- 1 USB-C charger port
- Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
- **Mount:** Desk edge/surface mount, under mount, edge mount (desk edge/surface mount: 0.5" – 1.75")

Specifications

- **Input:** DC, 65W max from HAT Base Control Box
- **Output:**
 - **Single Port in Use:**
 - **USB-C:** QC2.0, QC3.0, PD3.0, PPS, 65W max
 - **USB-A:** 5V/2A, 10W max
 - **Both Ports In Use:**
 - **USB-C:** 20V2.25A max
 - **USB-A:** 5V2A max

Dimensions

- **Product:** 2.4" x 2.2" x 1.2"
- Cord Length, PWR-AC: 5'
- Cord Length, PWR-AC-PS: 39" AC Adapter Cable, 71" Power Cable


Part Numbers

PWR-AC-__ USB Hub, Requires HAT Base PWR-AC-PS-__ USB Hub, Includes AC Adapter

STANDARD SURFACE POWER MODULE



Finishes



Features

- 2 power receptacles
- 1 USB-A charger port
- 2 USB-C charger ports
- Can charge a laptop up to 65 Watts (requires 5A-Rated USB-C cable)

Mount: Desk edge, 0.75" – 1.75" Conforms and tested to

UL 962A and UL 1310 standards Tamper-resistant (TR) AC outlets Integrated circuit breaker

Specifications

- **Input:** 125VAC, 60Hz, 15A max
- **Output:** AC Outlets (2): 120VAC, 60HZ, 15A max
- **Single port use:**
- **USB-A:** 5V3A, 9V2.A, 12V1.5, 18W max
- **USB-C1:** 5V/3A, 9V3A, 12V3A, 15V3A, 20V3.25A;
- **PPS (3.3-11V4.05A, 3.3-16V3A, 65W max);** PD3.0, APPLE2.4A, DCP1.5A, QC2.0/3.0, AFC USB-C2: 5V3A, 9V2.22A, 12V1.67A, 20W max
- **Multi port use:**
- **USB-C1 + USB-C2:** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 max 20W (5V3A, 9V2.22A, 12V1.67A)
- **USB-C1 + USB-A:** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-A max 18W (5V3A, 9V2.A, 12V1.5, 18W max)
- **USB-C2 + USB-A:** Both share 15W
- **USB-C1 + USB-C2 + USB-A :** USB-C1 max 45W(5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 & USB-A share 15W


Dimensions

- **Product:** 7.1" x 3.3" x 2.3"
- **Cord Length:** 6'
- **Part Numbers**
PWR-ACC-__ Standard Surface Power Module
- **Accessory**
PWR-UM-CK Under Mount Kit

WIRELESS SURFACE POWER MODULE



Finishes



Features

- 2 power receptacles
- 1 USB-A charger port
- 2 USB-C charger ports
- Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable) Fast wireless charging
- **Mount:** Desk edge, 0.75" – 1.75" Conforms and tested to UL 962A and UL 1310 standards Tamper-resistant (TR) AC outlets Integrated circuit breaker

Specifications

- **Input:** 125VAC, 60Hz, 15A max
- **Output:**
- **AC Outlets (2):** 120VAC, 60HZ, 15A max

Single port use:

- **USB-A:** 5V3A, 9V2.A, 12V1.5, 18W max
- **USB-C1:** 5V/3A, 9V3A, 12V3A, 15V3A, 20V3.25A; PPS (3.3-11V4.05A, 3.3-16V3A, 65W max), PD3.0,

APPLE2.4A, DCP1.5A, QC2.0/3.0, AFC

- **USB-C2:** 5V3A, 9V2.22A, 12V1.67A, 20W max

- **Multi port use:**

- **USB-C1 + USB-C2:** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 max 20W (5V3A, 9V2.22A, 12V1.67A);
- **USB-C1 + USB-A :** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-A max 18W (5V3A, 9V2.A, 12V1.5, 18W max)
- **USB-C2 + USB-A :** Both share 15W
- **USB-C1 + USB-C2 + USB-A :** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 & USB-A share 15W;
- **Wireless Charging:** 5W, 7.5W, 10W, 15W (auto detection)

Dimensions

- **Product:** 7.1" x 3.3" x 2.4"
- **Cord Length:** 6'


Part Numbers

PWR-ACC-WRLS-__ Wireless Surface Power Module

POWER STRIP



Finishes



Features

- 6 power receptacles
- Conforms and tested to UL 962A and UL 498 standards Tamper-resistant (TR) AC outlets Integrated circuit breaker

Specifications

- **Input:** 125VAC, 60Hz, 15A max Output:
- **AC Outlets (6):** 120VAC, 60HZ, 15A max

Dimensions

- **Product:** 14.6" x 2.4" x 1.5"
- **Cord Length:** 9'


Part Numbers

PWR-STRP-__Power Strip

POWER STRIP WITH HARDWIRED STANDARD SURFACE POWER MODULE



Finishes



Features

- **Power Strip:** 6 power receptacles
- **Power Module:** 2 power receptacles
- 1 USB-A charger port
- 2 USB-C charger ports
- Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
- Conforms and tested to UL 962A, UL 1310, and UL 498 standards Tamper-resistant (TR) AC outlets Integrated circuit breaker

Specifications

- **Input:** 125VAC, 60Hz, 15A max
 - **Output, Power Strip:**
 - **AC Outlets (6):** 120VAC, 60HZ, 12A max
 - **Output, Surface Mounted Power Module:** AC Outlets (2): 120VAC, 60HZ, 15A max USB:
- **Single Port Use**
 - **USB-A:** 5V3A, 9V2.A, 12V1.5, 18W max
 - **USB-C1:** 5V/3A, 9V3A, 12V3A, 15V3A, 20V3.25A; PPS (3.3-11V4.05A, 3.3-16V3A, 65W max), PD3.0, APPLE2.4A, DCP1.5A, QC2.0/3.0, AFC USB-C2: 5V3A, 9V2.22A, 12V1.67A, 20W max
- **Multi Port Use**
 - **USB-C1 + USB-C2:** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 max 20W (5V3A, 9V2.22A, 12V1.67A)
 - **USB-C1 + USB-A:** USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-A max 18W (5V3A, 9V2.A, 12V1.5, 18W max)
 - **USB-C2 + USB-A:** Both share 15W
 - **USB-C1 + USB-C2 + USB-A :** USB-C1 max 45W (5V3A, 9V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 & USB-A share 15W





Dimensions


- **Surface Unit:** 7.1" x 3.3" x 2.4"
- **Power Strip:** 14.6" x 2.4" x 1.5"
- **Cord Length:**
- **Input:** 9'
- **Between Units:** 3'

Part Numbers

- PWR-ACC-STRP-__
- Power Strip w/Standard Module
- PWR-ACC-WRLS-STRP-__
- Power Strip w/Wireless Module

DIMENSION

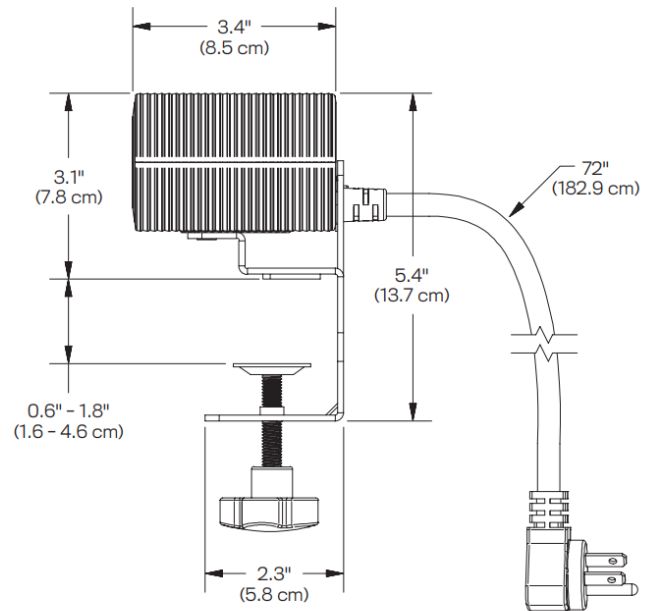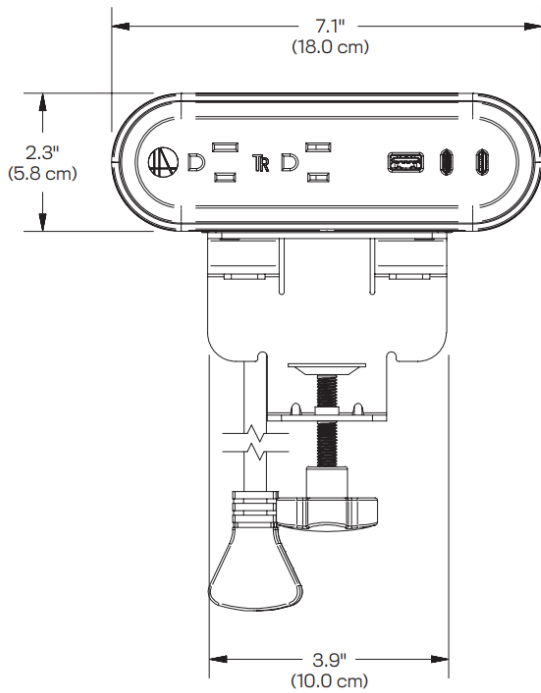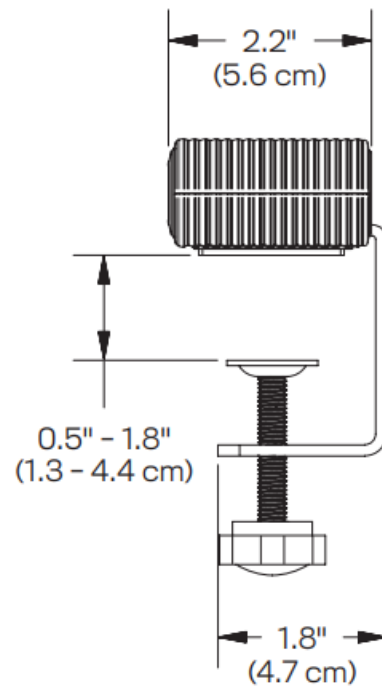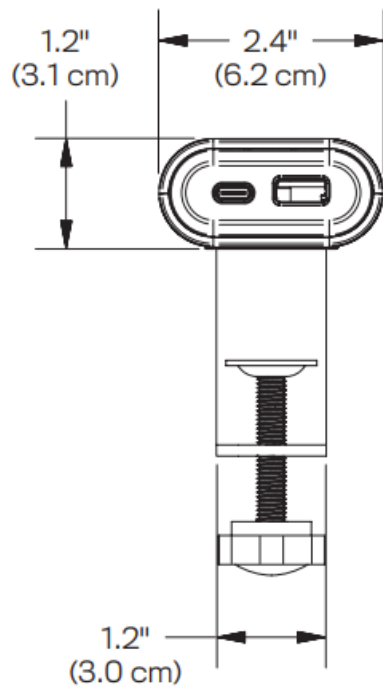

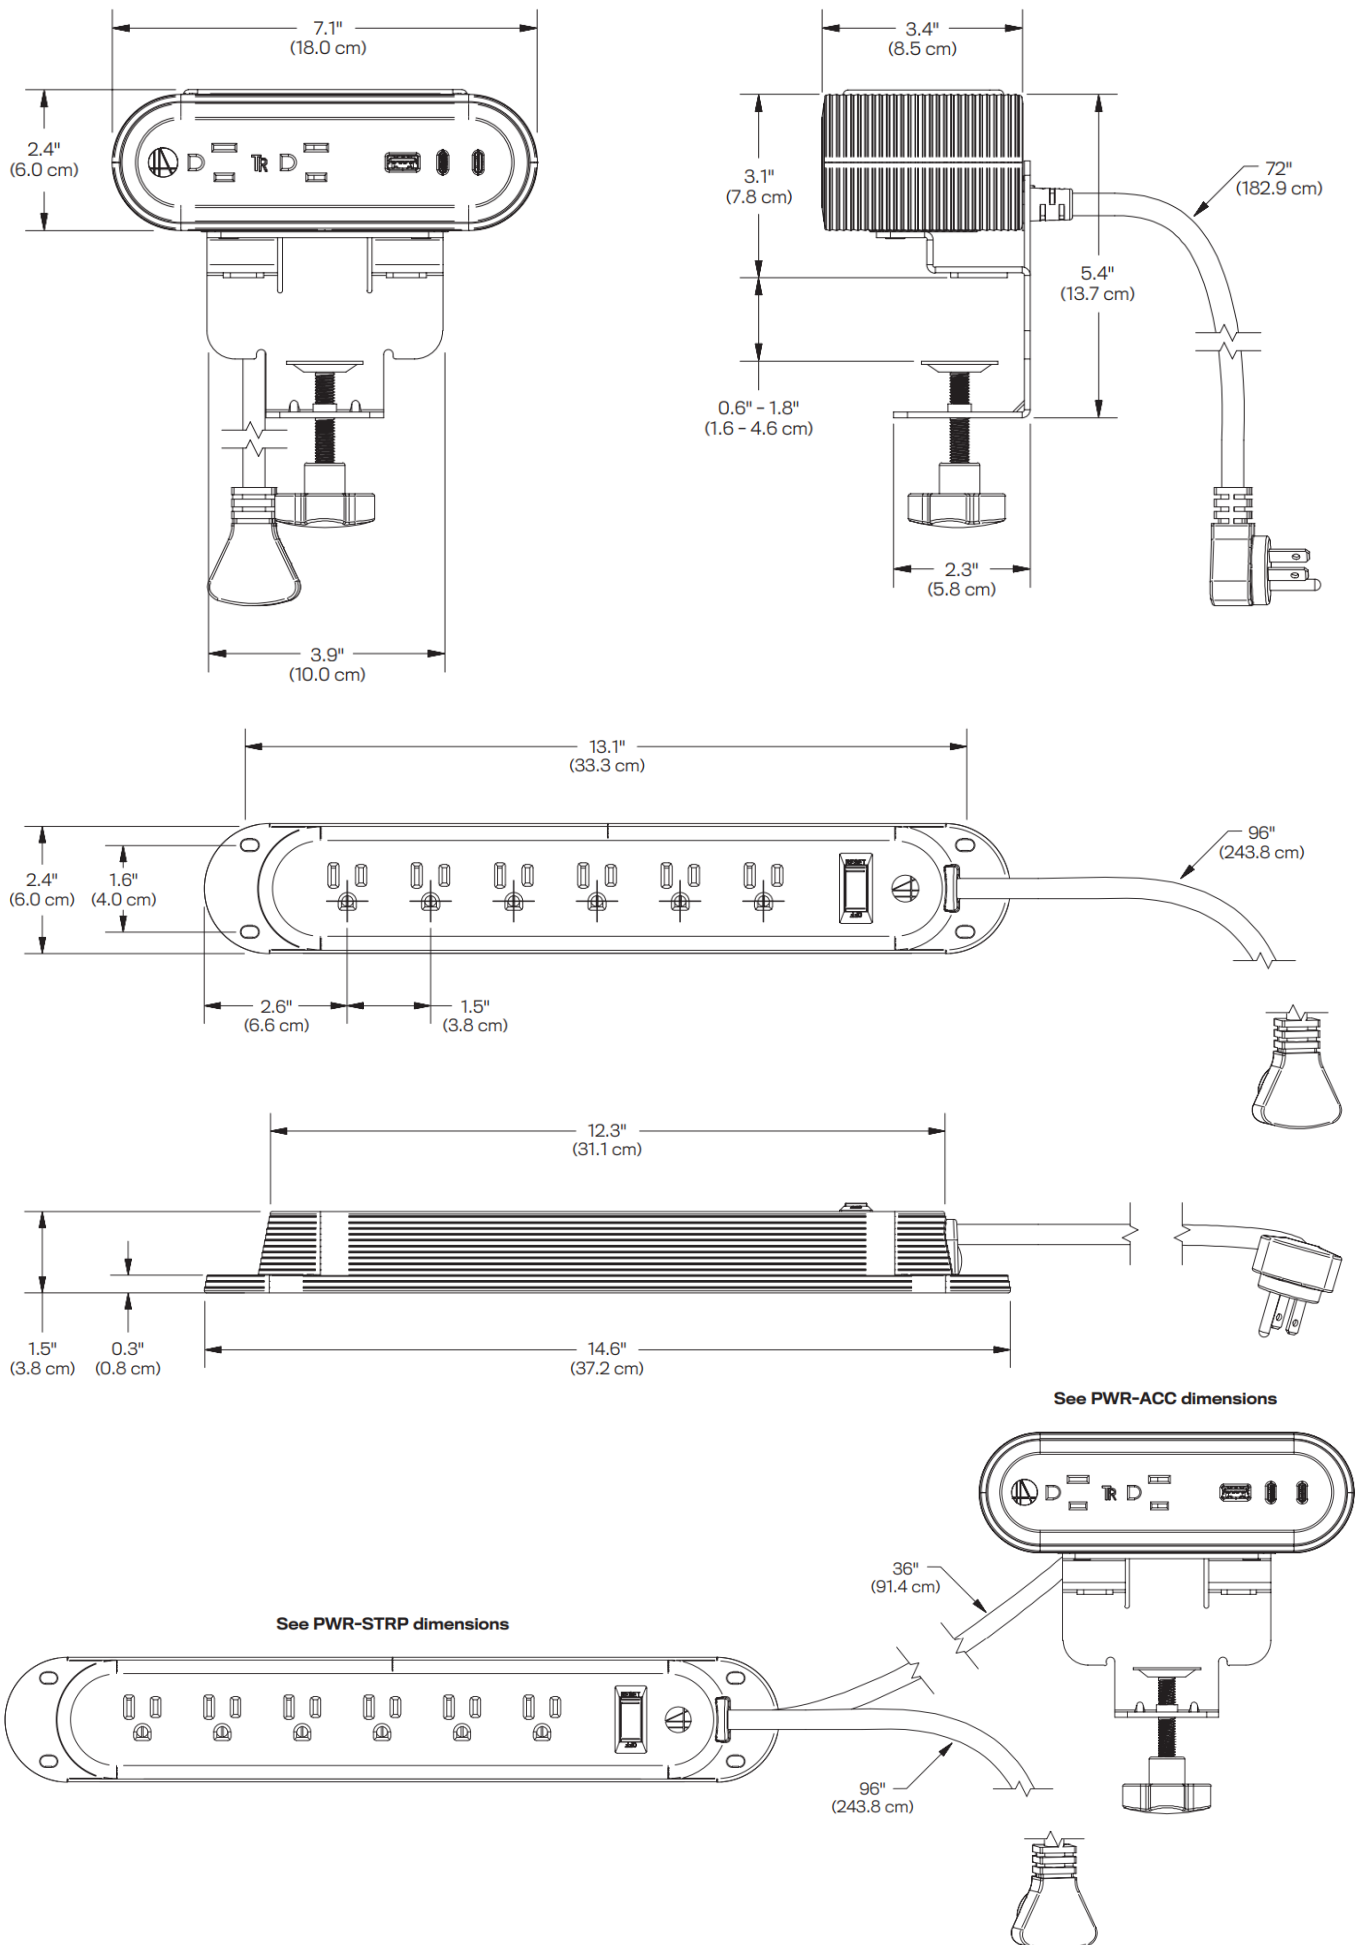

Frequently Asked Questions

- **Q: Can I charge multiple devices simultaneously using the USB ports?**
 - A: Yes, you can charge multiple devices simultaneously using the USB ports on the REYA Power products. However, make sure not to exceed the maximum power output limits specified in the product manual.

Documents / Resources

 REYA POWER STANDARD SURFACE POWER MODULE UNDER MOUNT KIT	HAT DESIGN WORKS REYA POWER Standard Surface Power Module Under Mount Kit [pdf] Owner's Manual REYA POWER Standard Surface Power Module Under Mount Kit, REYA POWER, Standard Surface Power Module Under Mount Kit, Surface Power Module Under Mount Kit, Power Module Under Mount Kit, Module Under Mount Kit, Under Mount Kit, Mount Kit, Kit
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.