


HAVIT Lightning HV3276T-BLK-12V Virsma Step Light Instruction Manual

Home » HAVIT LIGHTNING » HAVIT Lightning HV3276T-BLK-12V Virsma Step Light Instruction Manual












Product Specifications			
Model No.	HV3276T-BLK-12V	HV3276T-WHT-12V	
Name	Virsma		
Material	Aluminum		
Colour	Black	White	
IP Rating	IP54		
Input Voltage	12v DC		
Lamp Base	Built-in LED		
Lamp Wattag e	1x 4w		
Colour Temp	TRI Colour – 3000k, 4000k, 5500k		
Lumens	110lm, 115lm, 120lm		
CRI	> 80		
Wiring	Parallel		
Dimmable	No		
Warranty	2 Years Replacement*		

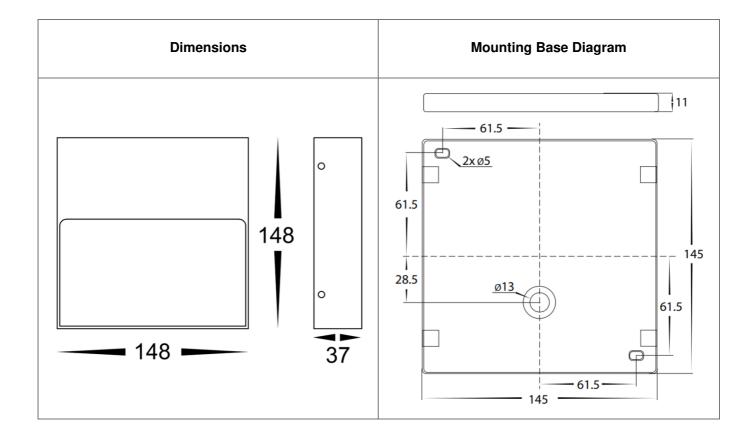

Contents

- 1 Important Safety Issues:
- 2 Steps for Installation:
- 3 Documents / Resources
 3.1 References
- **4 Related Posts**

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Do not exceed maximum wattage restrictions for globes: 240V GU10 = 35w / 12V MR16 = 20w
- · Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of the voltage required and cannot be installed more than 25m from LED Driver, if not within this allowance warranty will be voided.
- Aluminum and 304SS fittings must not be installed within 2km of any saltwater environments.
- When installing copper fittings, gloves must be worn to avoid any oils transferring to the fitting.
- All 316 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on the fitting. (Warranty does not cover Tea Staining)
- All o-rings and seals must be in place correctly to maintain the warranty.
- These instructions may be updated at any time due to product improvements, Please visit the website for the most current installation instructions.

Steps for Installation:


- 1. Make sure that the electrical circuit is free of voltage (master switch off)
- 2. Loosen Allen screws on side of the fitting and remove the face and set it aside.
- 3. Install the base plate to the wall in the desired location
- 4. Use an appropriate 12v DC LED Driver DO NOT CONNECT LIGHT FITTING DIRECTLY TO 240V
- 5. Connect the cable If more than one fitting is installed, wiring must be done in parallel.
- 6. Fitting is preset to 3000k, to change the slide switch to desired color temperature
- 7. Reattach face to base plate making sure Allen screws are tight to avoid water penetration
- 8. Apply silicon around the edge of the fitting to prevent any water from getting inside to electrical connections.
- 9. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician



Virsma Step Light Installation Instructions

Product Specifications			
Model No.	HV3276T-BLK-240V	HV3276T-WHT-240V	
Name	Virsma		
Material	Aluminium		
Colour	Black	White	
IP Rating	IP54		
Input Voltage	240v AC		
Lamp Base	Built in LED		
Lamp Wattag e	1x 4w		
Colour Temp	TRI Colour – 3000k, 4000k, 5500k		
Lumens	110lm, 115lm, 120lm		
CRI	> 80		
Wiring	Parallel		
Dimmable	No		
Warranty	2 Years Replacement*		

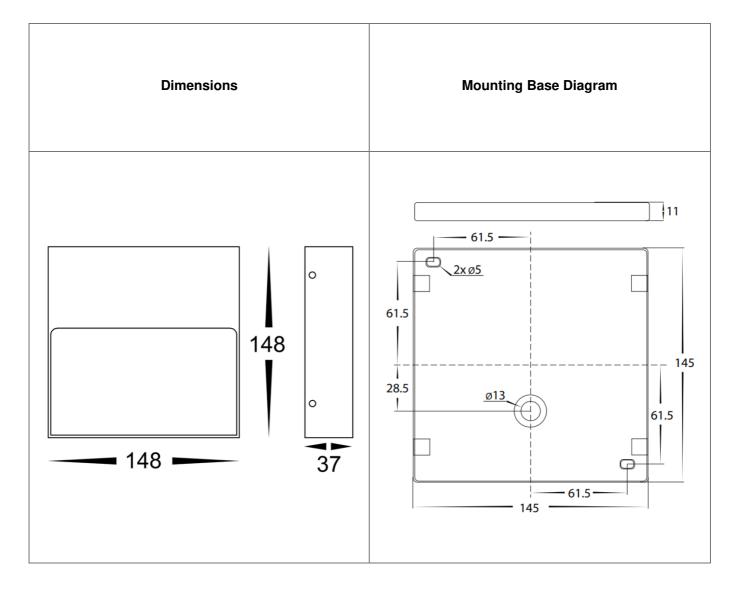

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of the voltage required, if not within this allowance warranty will be voided.
- Aluminum and 304SS fittings must not be installed within 2km of any saltwater environments.
- When installing copper fittings, gloves must be worn to avoid any oils transferring to the fitting.
- All 316 & 304 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on the fitting. (Warranty does not cover Tea Staining)
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check the online installation form for the most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)

- 2. Loosen Allen screws on side of the fitting and remove the face and set it aside.
- 3. Install base plate to the wall in the desired location
- 4. Connect the cable use wire with earth; connect the earth first, then live and neutral wire
- 5. Fitting is preset to 3000k, to change the slide switch to desired color temperature.
- 6. Reattach face to base plate making sure Allen screws are tight to avoid water penetration
- 7. Apply silicon around the edge of the fitting to prevent any water from getting inside to electrical connections.
- 8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician Warranty Terms & Conditions*



https://havit.com.au/pages/warranty-terms-and-conditions

Additional Information



HV3276T-BLK-240V

https://havit.com.au/collections/all/products/hv327 6t-wht-virsma-white-square-led-step-lights



1V3276T-WHT-240V

https://havit.com.au/collections/all/products/hv327 6t-wht-virsma-white-square-led-step-lights-1

Contact Details:

143 Beauchamp Road Matraville NSW 2036 Australia Tel: 02 9381 8300 Fax: 02 9666 8881

Email: sales@havit.com.au
Web: www.havit.com.au

Documents / Resources



HAVIT Lightning HV3276T-BLK-12V Virsma Step Light [pdf] Instruction Manual HV3276T-BLK-12V, HV3276T-WHT-12V, HV3276T-BLK-12V Virsma Step Light, HV3276T-BLK-12V, Virsma Step Light, Step Light, Light

References

May Havit Lighting

Manuals+,