


HCDC HD049-12V Pluggable Power Relay Module Instruction Manual

[Home](#) » [HCDC](#) » HCDC HD049-12V Pluggable Power Relay Module Instruction Manual 

HCDC HD049-12V Pluggable Power Relay Module

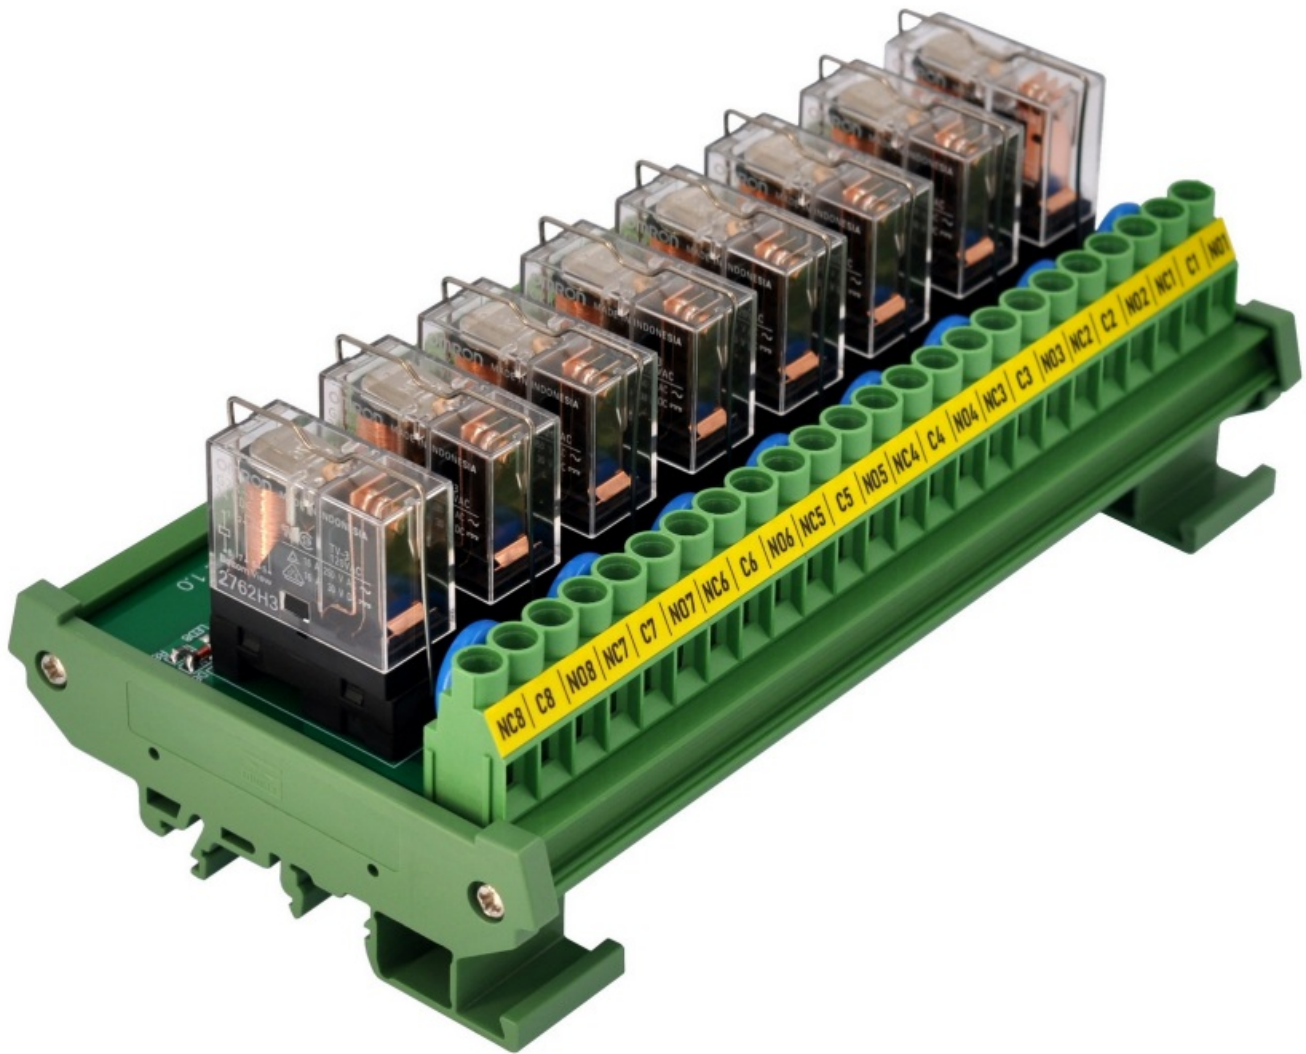

Contents

- [1 Feature](#)
- [2 Characteristic Parameters](#)
- [3 Schematic](#)
- [4 Dimensions](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)


Feature

- Omron G2R-1-E industrial power relays, switching current up to 16 Amp at 250VAC (or 30VDC).
- Support control mode: DC Common positive (Sink, NPN), DC Common negative (Source, PNP), or AC mode.
- LED indicator for each relay channel.
- Relay coil protection by means of a freewheeling diode.
- Easy to replace pluggable relays.
- Output switch COM to N/O with metal oxide varistor, surge protection up to 4500A(8/12 μ S).
- High quality fireproof nylon material DIN rail mount carrier (UL CE certified, not China low quality carrier), can support width 35mm / 32mm / 15mm rail.
- UL CE CQC certified terminal blocks. 94-V0 FR-4 fiber glass PCB.


Characteristic Parameters

SKU	HD049-12V	HD049-24V
Relay Part Number	G2R-1-E 12VDC	G2R-1-E 24VDC
Operating Voltage Range	DC 9.0 – 18V AC 9.0 – 15V	DC 18 – 36V AC 15 – 30V
Operating Current (Each channel)	32mA @12V	16mA @24V
Output Switch:		
For AC	Resistive load: 250VAC, 16Amp Inductive load: 250VAC, 8Amp	
For DC	Resistive load: 30VDC, 16Amp Inductive load: 30VDC, 8Amp	
Mechanical endurance	20,000,000 operations min. (at 18,000 operations/hr)	
Electrical endurance	100,000 operations min. (at 1,800 operations/hr under rated load)	
Terminal Blocks:		
Input	Wire range 26AWG to 12AWG / 2.5mm square, Pitch 5.0mm / 0.197". Strip length 7mm. Screws – M2.5	
Output	Wire range 26AWG to 10AWG / 4.0mm square, Pitch 7.62mm / 0.3". Strip length 8mm. Screws – M3	


Schematic

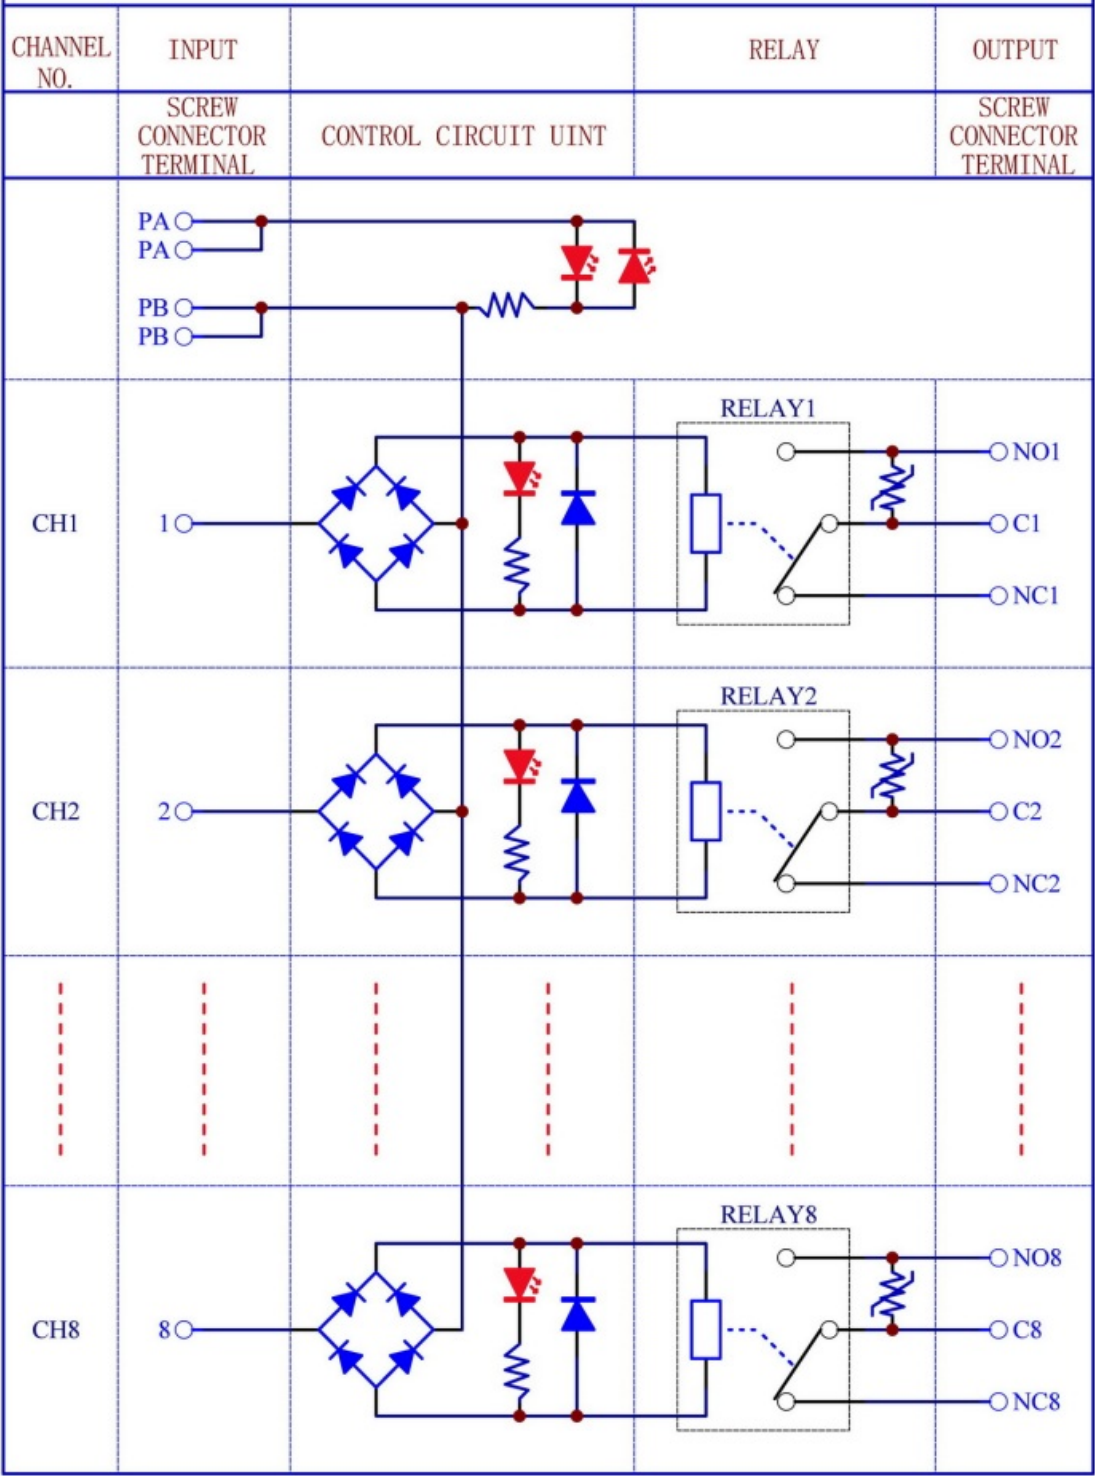


Control Mode Connects (Sink, Source, AC):

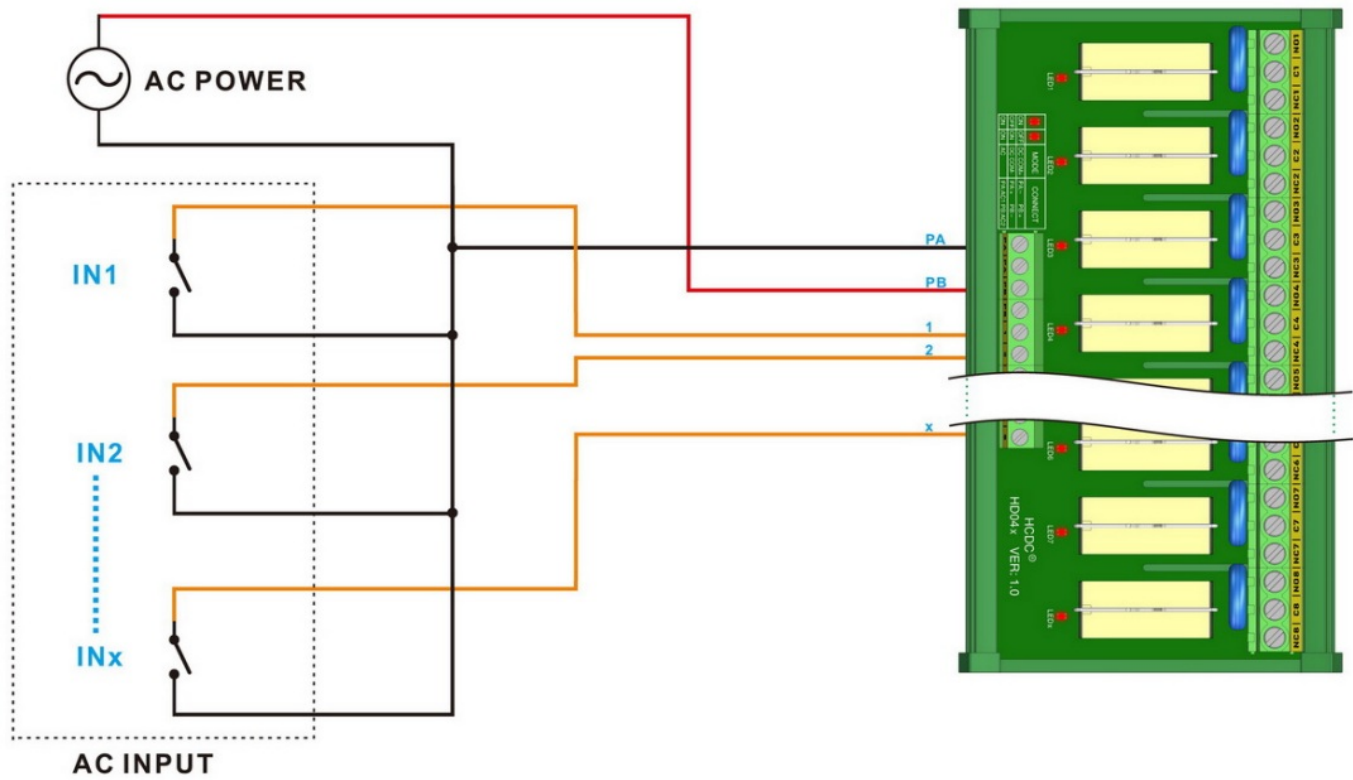


Dimensions

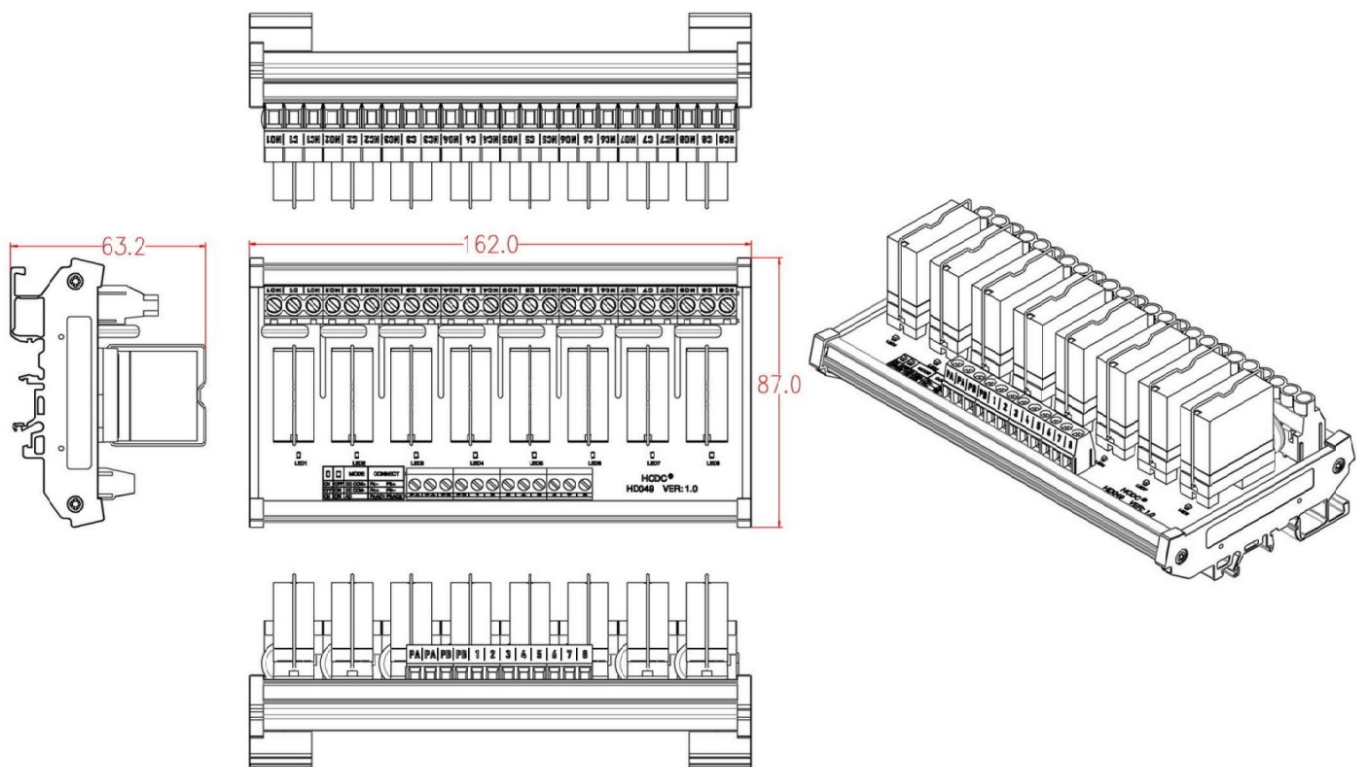

HCDC® xikentec.com			
Model No:	HD049	Date:	2022.10.21
Projection:		Unit:	mm

Documents / Resources

	<p>HCDC HD049-12V Pluggable Power Relay Module [pdf] Instruction Manual HD049-12V Pluggable Power Relay Module, HD049-12V, Pluggable Power Relay Module, Power Relay Module, Relay Module</p>
-----------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- [Xi Interface module, relay module, terminal block module, Fuse module, DIN Rail Mount module](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.