

Contents [[hide](#)]

[1 HEATHKIT MT-1 Cheyenne Mobile Transmitter](#)

[2 SPECIFICATIONS](#)

[3 INTRODUCTION](#)


[4 FAQ](#)

[5 Documents / Resources](#)

[5.1 References](#)

HEATHKIT

HEATHKIT MT-1 Cheyenne Mobile Transmitter

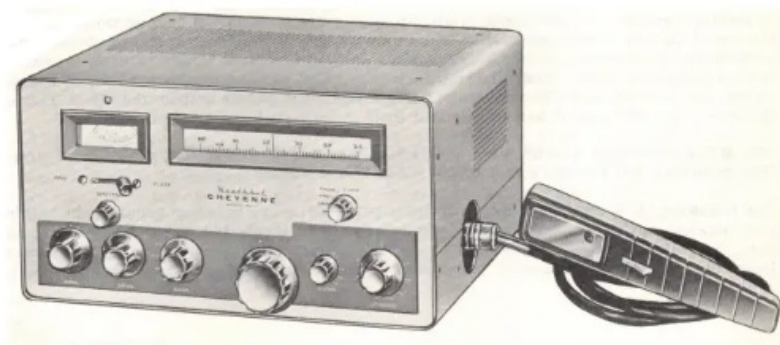

SPECIFICATIONS

- Power Input: 90 watt peak carrier controlled phone and CW.
- Output Impedance: 50 – 72 Ω .
- Output Coupling: Pi network (coaxial).
- Band Coverage:
 - 80 Meter Band: 3.5 – 4.0 me.
 - 40 Meter Band: 7.0 – 7.3 me.

- 20 Meter Band: 14.0 – 14.35 me.
- 15 Meter Band:..... 21.0 – 21.5 me.
- 10 Meter Band:..... 28.0 – 29.7 me.
- Panel Controls:
- Tube Complement:
- Meter Switch.
- Spotting Switch.
- Final Tuning.
- Drive Tuning.
- Band Switch.
- VFO Tuning.
- Audio (gain).
- Loading.
- Function Switch.
- 12AX7 Speech Amplifier.
- 6DE7 Carrier Control Modulator.
- 6AU6 VFO.
- 6CL6 Buffer.
- 5763 Driver.
- 6146 Final Amplifier.
- O A2 Voltage Regulator.
- Power Requirements:
- Filaments: . 6.3 Volts at 4.7 amperes AC or DC.
- B+: 12.6 Volts at 2.35 amperes AC or DC.
- Cabinet Size:500-600 Volts DC at 150 ma.
- Net Weight:300 Volts DC at 100 ma.
- Shipping Weight: 6 1/8" high x 12 1/8" wide x 9 15/16" deep. 15 1/2 lbs. 19 lbs.


INTRODUCTION

The Heathkit MT-1 "Cheyenne" Transmitter was designed to provide maximum power capabilities in mobile operation consistent with minimum battery drain. This has been accomplished through the use of carrier control modulation and low drain circuitry.

Power levels up to 90 watts input on modulation peaks are obtained. This is ample output to drive larger transmitters if used in fixed station operation. Other features include a stable, voltage-regulated VFO, VFO spotting switch and provision for CW operation. Designed as a companion unit for the MR-1 "Comanche" Receiver, the "Cheyenne" has an identical front panel layout and tuning mechanism.

The MT-1 consists of a 6AU6 VFO, a 6CL6 buffer, a 5763 driver and a 6146 final amplifier. The modulator utilizes two dual triodes: a 12AX7 and a 6DE7.

The following block diagram and circuit description will serve to better acquaint the builder with the operation of the Transmitter. This knowledge is an invaluable aid to construction and, as such, is well worth reading thoroughly. Lethal voltages are present at many points above and below the chassis, consequently, great care must be exercised when any tests or adjustments are made

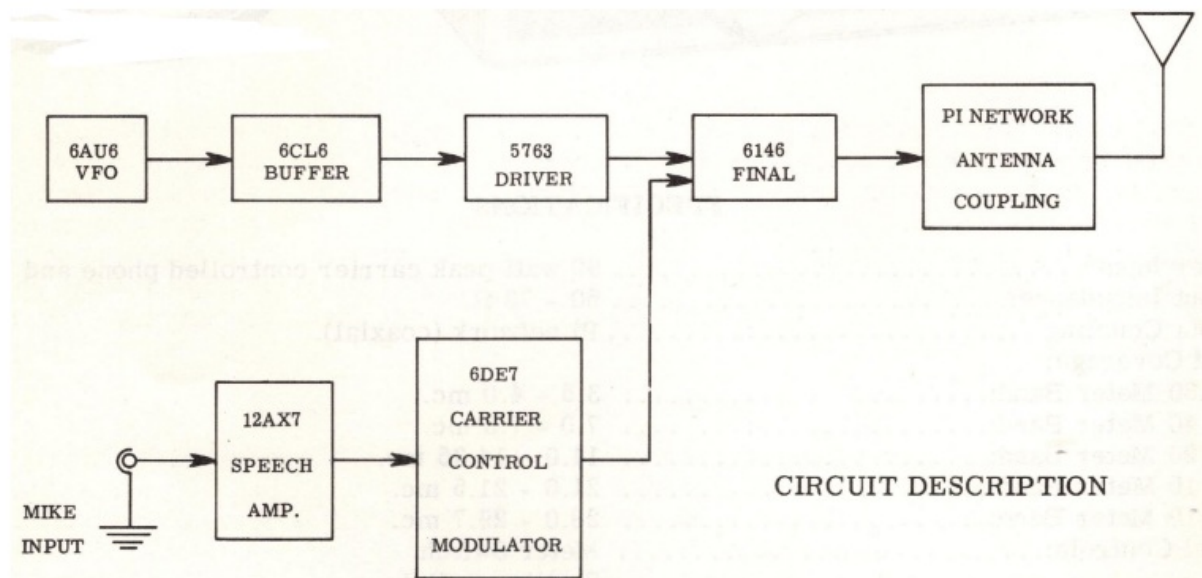

VFO

The VFO circuit consists of a 6AU6 tube operating as a Clapp oscillator in the frequency ranges of 1750 to 2000 kc, 7000 to 7175 kc, and 7000 to 7425 kc. The tube is mounted on top of the rigid enclosed chassis partition, thus placing all heat generating components outside the VFO enclosure. A double bearing ceramic insulated tuning capacitor is used as a frequency control. The VFO tuning capacitor, consisting of two stator assemblies of different capacities, permits a large bandsread at both high and low frequencies.

The coils are wound on heavy ceramic slug-tuned coil forms, heavily doped and baked. The result is a high Q coil upon which varying ambient conditions have a minimum

effect. Careful placement of temperature compensating capacitors near the coils tends to cancel drift due to coil heating. In addition, a temperature compensating capacitor across the grid circuit of the tube, carefully positioned physically, provides additional compensation for other varying inductive parameters.

- The VFO switch is operated by an interrupted switching mechanism on the band switch. VFO output frequency is correlated with the band in use as follows: 80 meters – 1750 to 2000 kc; 40 meters – 7000 to 7425 kc; 20 meters – 7000 to 7175 kc; 15 meters – 7000 to 7175 kc; and 10 meters – 7000 to 7425 kc. This unique switching system, coupled with the vernier slide rule full gear dial drive mechanism, provides more than adequate frequency spread on all bands .

The Clapp or series tuned Colpitts oscillator circuit presents a very low impedance to the tube grid at resonance. This minimizes the effect of shift in tube capacitance upon the output frequency. The capacitive voltage divider, necessary for operation of the Colpitts circuit, also lessens the effect of tube capacitance upon frequency. Both screen and plate voltages are stabilized by an OA2 regulator tube.

- The untuned output circuit of the VFO operates at 80 meters when the 80-meter band is used and at 40 meters when all other bands are used. This circuit consists of the output coaxial cable capacitance, plus the RF choke, in the VFO plate circuit. The VFO output thus obtained insures more than adequate drive on all bands. The output is fed to the 6CL6 buffer stage.
- A 6CL6 tube is employed as a buffer stage to further isolate the oscillator and, at the same time, insure adequate drive even under low battery conditions. The plate circuit of the 6CL6 is un- tuned when operating 80 meters, slug-tuned to 40 meters for operation at 40, 20 and 15 meters, and slug-tuned to 20 meters when operating 10 meters. An untuned RF choke and the two slugtuned coils are in series with the B+ lead to the 6CL6 plate. One section of the exciter band switch shorts out the coils not being used for a given band. The RF ground is provided by a large capacitor, since a direct ground would short the B+ lead. The output of the 6CL6 is capacitively coupled to the 5763 driver stage.

- **Driver**

A 5763 tube is employed as a driver for the 6146 final amplifier. Pi network interstage coupling is used between the driver and the final amplifier, with the input capacitor of the pi section variable, and the output capacitor fixed. The pi section inductance is

tapped and the proper tap for each band is selected by a section of the exciter band switch. The use of a pi network interstage coupling helps reduce the harmonic output of the Transmitter. The fixed output capacitor of the pi interstage coupling appears from grid to ground of the final amplifier and shorts out the higher frequency harmonics. The driver is keyed in the cathode circuit along with the final amplifier for CW operation.

- **Final Amplifier**

The plate circuit of the final amplifier is shunt fed with a 2.5 mh RF choke and is eapacity coupled into the pi network tank circuit. A tapped inductance is used for tuning all bands and the tap is selected by the band switch. In the 80-meter position, a 68 mmf 4 KV capacitor is automatically paralleled with the plate tuning capacitor. The loading capacitor consists of a three-gang, 450 mmf per section, variable capacitor with the sections in parallel.

- **Modulator**

The 12AX7 tube is used as a high-gain two stage resistance-coupled speech amplifier. The output of the speech amplifier is coupled to the 6DE7 modulator tube through a low capacity coupling capacitor. This low coupling capacity serves in shaping the response to favor the voice frequencies, thus allowing a higher average level to be maintained at frequencies where it will be most effective.

The audio energy from the speech amplifier is coupled to the grid of one triode section of a 6DE7. This tube contains two dissimilar triode sections: one triode section is rated at 1. 5 watts dissipation, and the other at 7 watts dissipation. The lower rated triode is used as a direct coupled driver, its plate being tied to the control grid of the heavier duty triode, which forms the modulator. The heavy duty triode is biased sufficiently to limit its conduction, and therefore the screen voltage on the final 6146 amplifier. This results in a low resting carrier and, consequently, very low battery drain.

With modulation, the conduction of the heavy duty triode section is varied in accordance with the average voice level. This gives a controlled carrier effect by varying the screen voltage on the 6146 tube, and at the same time, the audio signal is superimposed. The net result is to produce a carrier output which increases with the percentage of modulation applied.

- **Microphones**

Since mobile operation demands that properly shaped audio response be employed, a very carefully designed ceramic microphone is included with the MT-1 "Cheyenne"

[illegible]

1. What is the power input of the MT-1?


2. What are the band coverage frequencies?

- 80 Meter Band: 3.5 – 4.0 mc.
- 40 Meter Band: 7.0 – 7.3 mc.
- 20 Meter Band: 14.0 – 14.35 mc.
- 15 Meter Band: 21.0 – 21.5 mc.
- 10 Meter Band: 28.0 – 29.7 mc.

3. What tubes are used in the MT-1?

The tube complement includes 12AX7, 6DE7, 6AU6, 6CL6, 5763, 6146, and OA2

Documents / Resources



[HEATHKIT MT-1 Cheyenne Mobile Transmitter \[pdf\]](#) Instruction Manual

MT-1, MT-1 Cheyenne Mobile Transmitter, Cheyenne Mobile Transmitter, Mobile Transmitter, Transmitter

References

- [User Manual](#)

HEATHKIT

Cheyenne Mobile Transmitter, HEATHKIT, Mobile Transmitter, MT-1, MT-1 Cheyenne Mobile Transmitter, Transmitter

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.