

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Oraimo](#) /
- › [Oraimo SpaceBox Pro Portable Bluetooth Speaker User Manual](#)

## Oraimo OBS-682

# Oraimo SpaceBox Pro Portable Bluetooth Speaker User Manual

MODEL: OBS-682

Your comprehensive guide to setting up, operating, and maintaining your Oraimo SpaceBox Pro speaker.

## Product Overview

The Oraimo SpaceBox Pro is a portable Bluetooth speaker designed to deliver powerful audio with enhanced bass and dynamic light effects. It features multiple playback options, a long-lasting battery, and a durable, splash-proof design, making it suitable for various environments.



Image: Front view of the Oraimo SpaceBox Pro speaker, showcasing its design and the illuminated infinity symbol light effect.

## Key Features:

- **80W Max Booming Sound:** Delivers powerful stereo sound with rich bass and clear audio.
- **Infinite Beat-Adaptive Lightshow:** LED light effects synchronize with music for dynamic visuals.
- **Customized Karaoke Effect:** Features voice enhancement and echo effects for singing.
- **28H Playtime & Fast Charge:** Offers extended playback and quick recharging.
- **Ultra-Portable Design:** Lightweight with an included shoulder strap for easy transport.
- **True Wireless Stereo (TWS):** Allows pairing two speakers for 160W surround sound.
- **Dual Playback Options:** Supports music from USB/TF Card and Bluetooth.
- **IPX4 Water Resistance:** Splash-proof design for outdoor use.

## What's in the Box

---

Before you begin, please ensure all items are present in the package:

- Wireless Speaker x 1
- Welcome Guide x 1
- Shoulder Strap x 1
- Type-C Charging Cable x 1

# What's in the Box?

- Wireless Speaker x 1
- Welcome Guide x 1
- Shoulder Strap x 1
- Type-C Charging Cable x 1



Image: The Oramo SpaceBox Pro speaker, its packaging, Type-C charging cable, shoulder strap, and welcome guide, illustrating the package contents.

## Setup

### 1. Charging the Speaker

Before first use, fully charge the speaker. Connect the provided Type-C charging cable to the speaker's charging port and the other end to a USB power adapter (not included). The charging indicator will show the charging status. A full charge takes approximately 2 hours.

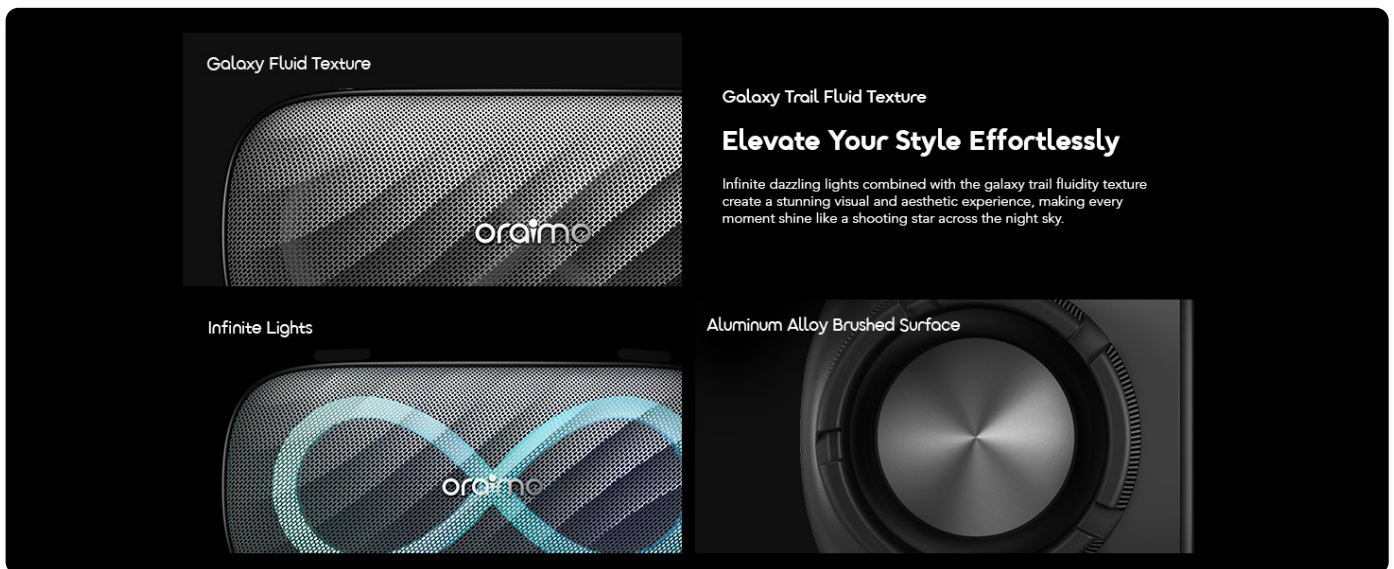


Image: The Oramo SpaceBox Pro speaker connected to a power source via its Type-C charging cable, demonstrating the charging process.

## 2. Power On/Off

- **Power On:** Press and hold the Power button for 2 seconds.
- **Power Off:** Press and hold the Power button for 2 seconds.

## 3. Bluetooth Pairing

1. Ensure the speaker is powered on and in Bluetooth pairing mode (indicated by a flashing LED).
2. On your device (smartphone, tablet, etc.), enable Bluetooth.
3. Search for "Oraimo SpaceBox Pro" in the list of available devices and select it to connect.
4. Once connected, the speaker will emit a confirmation sound, and the LED indicator will become solid.

*Note:* For Android devices, a Google Pop-Up Notification may appear for smart and fast pairing.



Image: The Oramo SpaceBox Pro speaker next to a smartphone displaying a Google Pop-Up Notification, illustrating the smart and fast pairing feature.

## 4. True Wireless Stereo (TWS) Pairing

To achieve 160W surround sound, you can pair two Oramo SpaceBox Pro speakers:

1. Ensure both speakers are powered on and not connected to any Bluetooth device.
2. On one speaker, press and hold the TWS button (refer to the speaker's physical buttons for exact location) for 2 seconds. It will enter TWS pairing mode.

- The speakers will automatically connect to each other. Once connected, one speaker will act as the master (left channel) and the other as the slave (right channel).
- Connect your device to the master speaker via Bluetooth as described in step 3.

## 5. Other Playback Modes

- TF Card Playback:** Insert a TF (microSD) card with audio files into the TF card slot. The speaker will automatically switch to TF card mode and begin playback. Supports up to 128GB.
- AUX-in Playback:** Connect an audio device to the speaker's AUX-in port using a 3.5mm audio cable (not included). The speaker will automatically switch to AUX mode.
- USB Drive Playback:** Insert a USB flash drive with audio files into the USB port. The speaker will automatically switch to USB mode and begin playback.

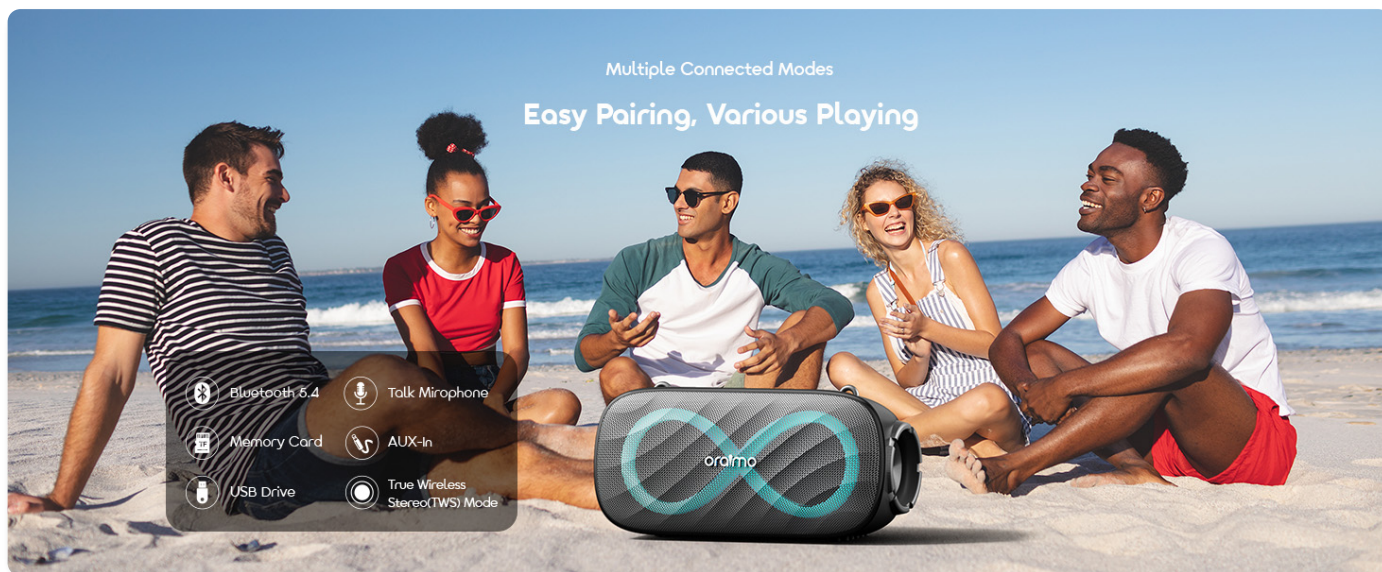


Image: The Oramo SpaceBox Pro speaker on a beach with people, illustrating its multiple connectivity options: Bluetooth, Memory Card, USB Drive, Talk Microphone, and AUX-in.

## Operating Instructions

### 1. Basic Controls

Button/Action	Function
<b>Power Button (Press &amp; Hold 2s)</b>	Power On/Off
<b>Play/Pause Button (Short Press)</b>	Play/Pause music; Answer/End call
<b>Volume + Button (Short Press)</b>	Increase Volume
<b>Volume - Button (Short Press)</b>	Decrease Volume
<b>Volume + Button (Long Press)</b>	Next Track
<b>Volume - Button (Long Press)</b>	Previous Track
<b>Light Effect Button (Short Press)</b>	Cycle through light modes
<b>TWS Button (Press &amp; Hold 2s)</b>	Initiate TWS Pairing

### 2. Light Effects

The speaker features beat-adaptive light effects. Short press the Light Effect button to cycle through different modes:

- **Grooving:** Lights pulse with the beat.
- **Flowing:** Lights move in a continuous pattern.
- **Breathing:** Lights fade in and out.
- **Crossing:** Lights cross and interact.
- *(Additional modes may be available via the Oraimo Sound App)*




Image: Multiple Oraimo SpaceBox Pro speakers lined up, each displaying a different "Infinite Beat Light" mode (Grooving, Flowing, Breathing, Crossing), visualizing various rhythm patterns.

### 3. Karaoke Function

The speaker supports karaoke with voice enhancement and echo effects. Connect a 6.35mm wired microphone or a wireless microphone with a 6.35mm dongle (microphone not included) to the designated port on the speaker. You can further customize the karaoke effects using the Oraimo Sound App.

Custom Karaoke Effects

Endless Singing Fun

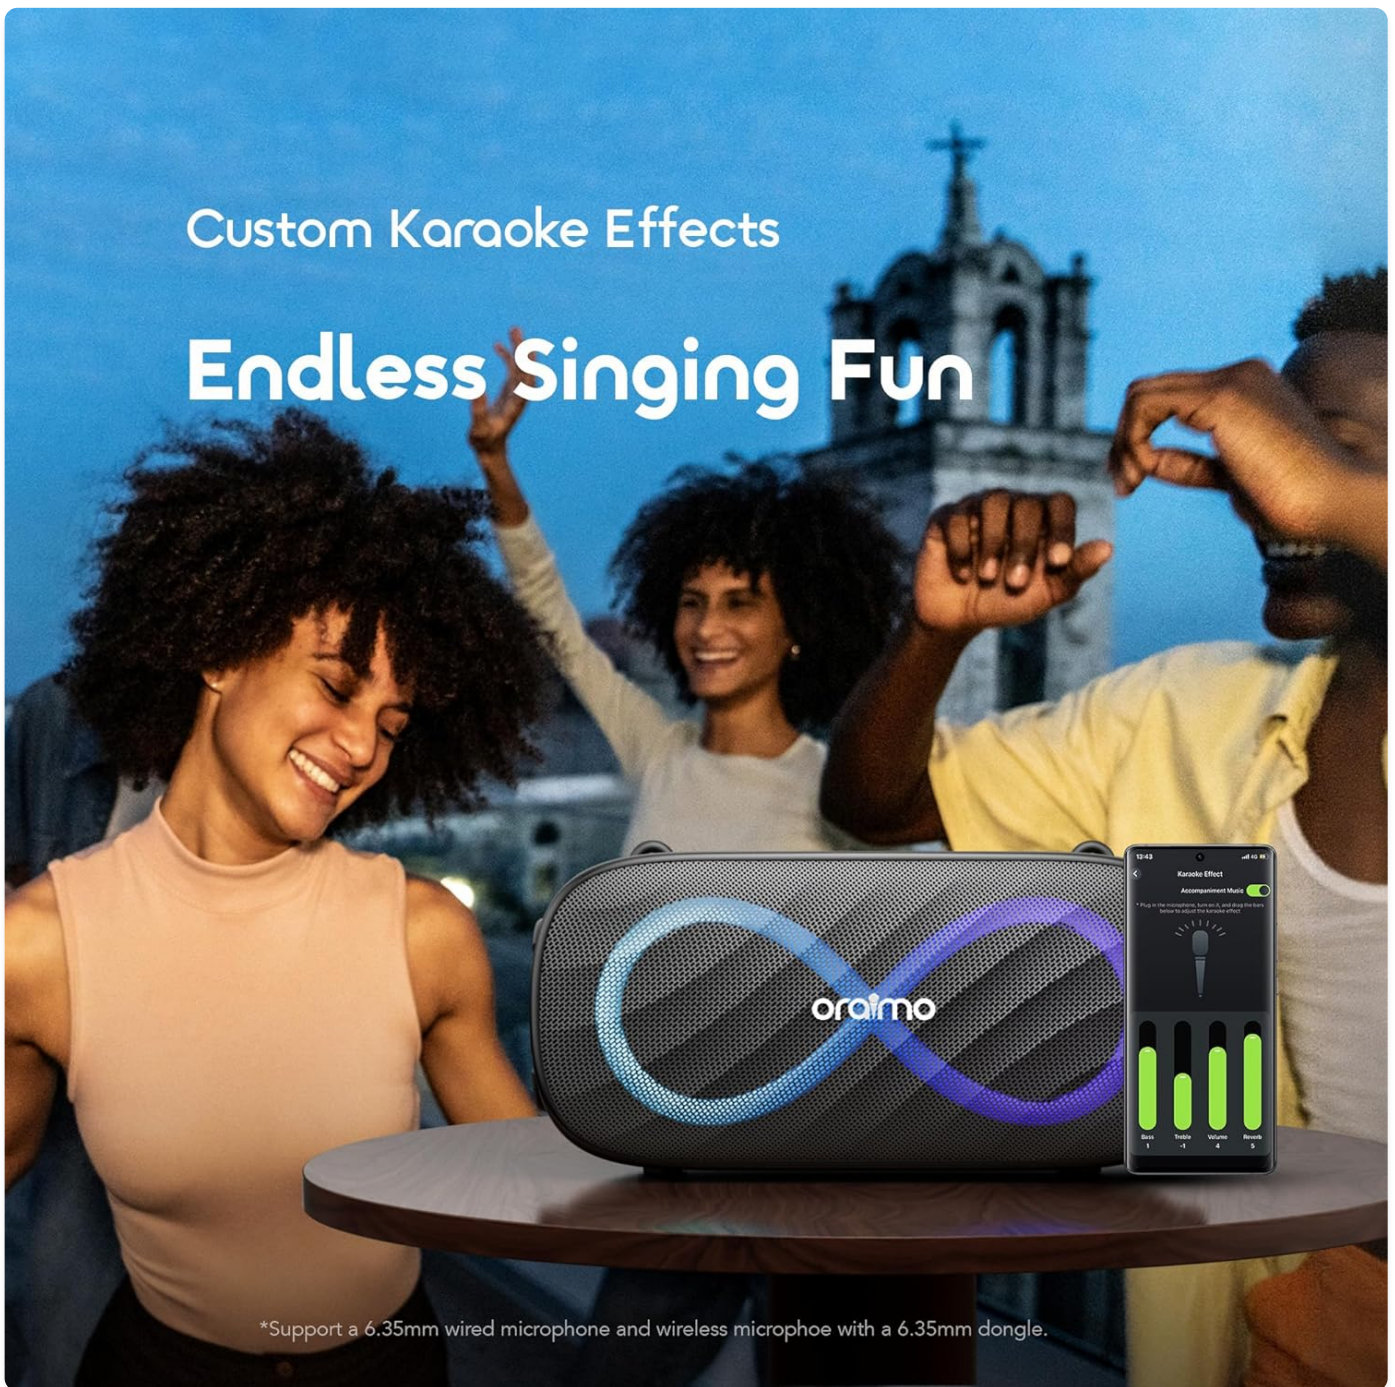

\*Support a 6.35mm wired microphone and wireless microphone with a 6.35mm dongle.

Image: People enjoying a party with the Oramo SpaceBox Pro speaker, one person holding a microphone, demonstrating the custom karaoke effects feature.

#### 4. Oramo Sound App

For advanced customization and features, download the Oramo Sound App. The app allows you to:

- Customize EQ settings.
- Control light effects.
- Adjust karaoke effects.
- Receive firmware updates.



Image: The Oraimo SpaceBox Pro speaker with a smartphone displaying the Oraimo Sound App interface, highlighting customizable options like EQ, light effects, karaoke effects, and firmware updates.

## Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the speaker's surface. Do not use abrasive cleaners or solvents.
- **Water Resistance:** The speaker is IPX4 water-resistant, meaning it can withstand splashes. Do not submerge the speaker in water or expose it to heavy rain. Ensure all port covers are securely closed before exposure to water.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the speaker frequently. Charge it regularly, even if not in use for extended periods.

## Troubleshooting

Problem	Solution
Speaker does not power on.	Ensure the speaker is charged. Connect it to a power source and try again.
Cannot pair with Bluetooth device.	Ensure the speaker is in pairing mode (flashing LED). Make sure Bluetooth is enabled on your device. Move the speaker closer to your device. Forget "Oraimo SpaceBox Pro" from your device's Bluetooth list and try pairing again. Restart both the speaker and your device.
No sound from the speaker.	Check the volume level on both the speaker and your connected device. Ensure the speaker is correctly connected via Bluetooth, AUX, TF card, or USB. If using AUX, ensure the cable is fully inserted and functional.
TWS pairing fails.	Ensure both speakers are not connected to any other Bluetooth device. Place speakers close to each other during TWS pairing. Try resetting both speakers and repeating the TWS pairing process.
Light effects are not working.	Ensure the speaker is powered on and playing audio. Try pressing the Light Effect button to cycle through modes.

## Specifications

Feature	Detail
Model Name	OBS-682
Brand	Oraimo
Connectivity Technology	Bluetooth
Speaker Maximum Output Power	80 Watts
Frequency Response	20 KHz
Power Source	Battery Powered
Water Resistance Level	IPX4 (Water Resistant)
Material	Plastic
Color	Gray
Product Dimensions	0.52 x 1.17 x 0.51 inches
Item Weight	6.3 pounds
Special Features	Bass Boost, Portable, Hi Res Audio, LED Light, Stereo Pairing

## Warranty and Support

### Warranty Information

The Oraimo SpaceBox Pro Portable Bluetooth Speaker comes with a Limited Warranty. Please refer to the warranty card included in your package for specific terms and conditions, including warranty period and coverage details. Keep your purchase receipt as proof of purchase for warranty claims.

### Customer Support

For any questions, technical assistance, or warranty inquiries, please contact Oraimo customer support. You can find contact details on the official Oraimo website or in the welcome guide provided with your speaker.

Visit the official Oraimo Store for more information:[Oraimo Store on Amazon](#)