Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

OMOTON B0F23L2QGS

OMOTON Wireless Bluetooth Keyboard and Mouse Kit for Mac - User Manual

Model: B0F23L2QGS

Introduction

This user manual provides comprehensive instructions for the OMOTON Wireless Bluetooth Keyboard and Mouse Kit, specifically designed for Mac OS. The kit offers a seamless and efficient user experience with its multi-device connectivity, ergonomic design, and rechargeable features. Please read this manual carefully to ensure proper use and optimal performance of your new keyboard and mouse.

Key Features:

- **Mac OS Compatibility:** Designed for Mac Pro, Mac Mini, MacBook Pro, MacBook Air, iMac, and iMac Pro. The mouse is also compatible with iOS, Windows, and Android systems.
- **Multi-Device Connectivity:** The keyboard supports up to 3 Bluetooth channels, allowing you to switch between devices effortlessly.
- **Adjustable DPI Mouse:** The wireless mouse features three adjustable DPI levels (800/1200/1600) for precise control.
- **Rechargeable Battery:** Both the keyboard and mouse are equipped with built-in rechargeable batteries, eliminating the need for disposable batteries.
- **Ergonomic Design:** Features a comfortable 12-degree tilt angle and scissor-key switches for quiet and efficient typing.
- **Italian QWERTY Layout:** Standard Italian QWERTY keyboard layout for familiar typing.



Image: OMOTON Wireless Bluetooth Keyboard and Mouse Kit, showcasing the keyboard and mouse on a desk setup.

Setup and Pairing

Charging the Devices

Before initial use, ensure both the keyboard and mouse are fully charged. Use the included USB charging cable to connect the devices to a power source. A full charge typically takes 2-3 hours.



Image: The OMOTON keyboard connected via a USB-C cable for charging, illustrating the charging port location.

Keyboard Pairing Instructions

1. **Power On:** Locate the ON/OFF switch on the keyboard and slide it to the "ON" position.
2. **Enter Pairing Mode:** Press and hold one of the Bluetooth channel buttons (BT1, BT2, or BT3) for 3-5 seconds. The corresponding indicator light will illuminate red, indicating the keyboard is in pairing mode.
3. **Connect on Mac:** On your Mac device, go to**System Settings** > **Bluetooth**. Ensure Bluetooth is enabled. Select "OMOTON Keyboard" from the list of available devices to complete the pairing process.

Mouse Pairing Instructions

1. **Power On:** Locate the ON/OFF switch on the mouse and slide it to the "ON" position.
2. **Enter Pairing Mode:** Press and hold the Bluetooth pairing button located on the back of the mouse for 3 seconds. The indicator light will turn blue.
3. **Connect on Device:** On your device (Mac, iOS, Windows, Android), go to**Bluetooth Settings**. Ensure Bluetooth is enabled. Select "BT5.0 Mouse" from the list of available devices to complete the pairing process. The indicator light will turn off once pairing is complete.



1. Portare l'interruttore della tastiera su ON.

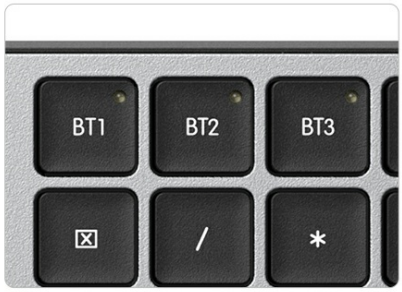

2. Premere il pulsante “Connect” per 3~5s, l'indicatore rosso si accenderà per attivare la modalità di accoppiamento.

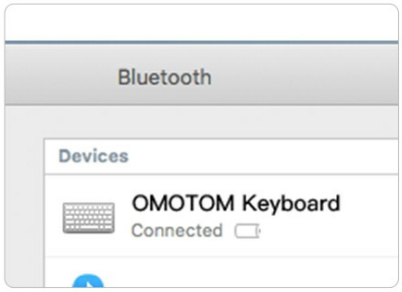

3. Confermare che il dispositivo è disponibile per il Bluetooth, quindi trovare il dispositivo: BT5.0 Mouse, la connessione è completa.

Suggerimento: questo prodotto dispone di 3 canali Bluetooth indipendenti. Premere brevemente il tasto del codice di accoppiamento per passare al canale Bluetooth 1/2/3.

Image: Visual guide for keyboard pairing, showing the ON/OFF switch, BT1/BT2/BT3 buttons, and a device successfully connected in Bluetooth settings.

Operating Instructions

Switching Between Multiple Devices (Keyboard)

The OMOTON keyboard allows you to connect to up to three different devices simultaneously and switch between them with ease.

- To switch to a previously paired device, simply press**Fn + BT1**, **Fn + BT2**, or **Fn + BT3**, corresponding to the channel your device is paired with.



Image: Illustration of the keyboard's multi-device support, showing it connected to a laptop, an iMac, and an iPad via Bluetooth channels 1, 2, and 3 respectively.

Adjusting Mouse DPI

The wireless mouse offers three adjustable DPI levels (800, 1200, 1600) to suit your preference for cursor speed and precision. To cycle through the DPI settings, press the DPI button located on the top of the mouse, usually behind the scroll wheel.



Image: Close-up of the OMOTON mouse highlighting the DPI adjustment button and indicating the 800, 1200, and 1600 DPI levels.

Ergonomic Design and Typing Experience

The keyboard is designed with an ergonomic 12-degree tilt angle to reduce wrist fatigue during prolonged use. Its scissor-key switch mechanism ensures a soft touch and comfortable, quiet typing experience.



Image: Side view of the OMOTON keyboard demonstrating its ergonomic 12-degree tilt for comfortable typing.



Image: Detailed view of a keyboard key, illustrating the scissor-key switch mechanism for quiet and responsive typing.

Maintenance

Recharging

When the battery is low, connect the keyboard and mouse to a power source using the provided USB charging cable. The indicator light will show charging status and turn off when fully charged. A full charge provides approximately 150 hours of operation.

Cleaning

To clean your keyboard and mouse, use a soft, dry, lint-free cloth. Avoid using harsh chemicals or abrasive materials, as these can damage the surface of the devices.

Troubleshooting

Connection Delays

Some users may experience a slight delay (a few seconds) for the keyboard and mouse to reconnect to a Mac device after a period of inactivity or system startup. This is often related to the device's Bluetooth architecture. Please allow a few seconds for the connection to re-establish.

Pairing Issues

- Ensure both the keyboard and mouse are fully charged.
- Verify that the devices are in pairing mode (indicator light flashing).
- Confirm that Bluetooth is enabled on your host device (Mac, iOS, Windows, Android).
- Make sure the devices are within the effective operating range (up to 10 meters).
- Try unpairing and re-pairing the devices if connection issues persist.

Unresponsive Keys or Mouse

- Check the battery level of the device and recharge if necessary.
- Ensure the device is connected to the correct Bluetooth channel.
- Restart your host device and try reconnecting.

Mouse Glide Issues

If the mouse does not glide smoothly, check the surface it is being used on. Some mouse pads or surfaces may not be ideal for optimal mouse movement. Ensure the mouse's feet are clean and free of debris.

Specifications

Feature	Detail
Brand	OMOTON
Model Number	B0F23L2QGS
Color	Space Gray
Connectivity Technology	Bluetooth
Special Features	Ergonomic, Rechargeable
Compatible Devices	Mac Pro, Mac Mini, MacBook Pro, MacBook Air, iMac, iMac Pro, iOS, Windows, Android
Keyboard Layout	QWERTY (Italian)
Number of Keys	111
Mouse DPI Levels	800 / 1200 / 1600
Battery Type	1 Lithium Polymer (included)
Minimum OS Requirement	MacOS 10.15 Catalina
Recommended Use	Office



Image: Detailed view of the keyboard and mouse, showing their dimensions, the ON/OFF switch, and the Type-C charging port.

Warranty Information

The product comes with a manufacturer's warranty. For specific details regarding the warranty period and coverage, please refer to the product packaging or contact the seller directly. Keep your proof of purchase for warranty claims.

Customer Support

For any questions, technical assistance, or support regarding your OMOTON Wireless Bluetooth Keyboard and Mouse Kit, please contact the seller, OM-Treasure-EU, through the Amazon platform. You may also visit the official OMOTON brand store for additional resources and contact information.

Seller: OM-Treasure-EU

Brand Store: OMOTON Official Store

© 2026 OMOTON. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0F23L2QGS

More documents and user manuals: **https://manuals.plus/**