

## DUKWIN YG22B-034-GN-FP

# DUKWIN Automatic Watch Winder User Manual

Model: YG22B-034-GN-FP

Brand: DUKWIN

## 1. INTRODUCTION

---

Thank you for choosing the DUKWIN Automatic Watch Winder. This device is designed to keep your automatic watches wound and ready to wear, while also providing secure storage and display options. This manual provides detailed instructions for the setup, operation, and maintenance of your watch winder to ensure optimal performance and longevity.

Please read this manual thoroughly before using the product and retain it for future reference.

## 2. SAFETY INFORMATION

---

- Ensure the power adapter is compatible with your local voltage before plugging in.
- Do not expose the watch winder to water or excessive humidity.
- Avoid placing the unit in direct sunlight or near heat sources.
- Do not attempt to disassemble or repair the unit yourself. Contact qualified personnel for service.
- Keep out of reach of children and pets.
- Unplug the unit from the power outlet when not in use for extended periods or during cleaning.

## 3. PRODUCT OVERVIEW

---

The DUKWIN Automatic Watch Winder (Model YG22B-034-GN-FP) is a sophisticated device featuring 3 winding rotors, 4 static watch holders, and a jewelry storage drawer. It includes an LCD touch screen, remote control, built-in white illumination, and a fingerprint lock for enhanced security.



Figure 1: Front view of the DUKWIN Automatic Watch Winder, showcasing its elegant design and functional layout.

### Components:

- **Winding Rotors (x3):** For automatic watches requiring continuous movement.
- **Static Watch Holders (x4):** For additional watch display or storage.
- **Jewelry Storage Drawer:** Located at the bottom for accessories.
- **LCD Touch Screen:** For setting winding modes and controlling features.
- **Fingerprint Lock:** For secure access to the winder.
- **LED Illumination:** Internal white light for display.
- **Power Input Port:** For connecting the AC adapter.
- **Power Switch:** To turn the unit on/off.
- **Pause Switch:** To temporarily stop winding operations.

# 3 IN 1 WATCH WINDER BOX



Figure 2: Exploded view highlighting the 3-in-1 functionality: winding, display, and jewelry storage.

## 4. SETUP

1. **Unpacking:** Carefully remove the watch winder from its packaging. Inspect for any damage.
2. **Placement:** Place the unit on a stable, flat surface away from direct sunlight, moisture, and strong magnetic fields.
3. **Power Connection:** Locate the power input port at the back of the unit. Connect the provided AC adapter to the port and then plug the adapter into a suitable wall outlet.
4. **Power On:** Flip the Power Switch located at the back of the unit to the 'ON' position. The LCD screen should illuminate.

**FIT WATCH DIA.LESS THAN 60MM  
CAN HOLD 160-260MM WATCH BRACELET**



Figure 3: Rear panel showing the power switch, pause switch, and power input port for easy setup.

## **5. OPERATING INSTRUCTIONS**

### **5.1 Placing Watches**

- Gently place your automatic watches onto the winding cushions. Ensure the watch is securely fitted.
- For static display, place watches on the upper holders.
- The winder is designed to fit watches with a diameter less than 60mm and bracelets between 160-260mm.

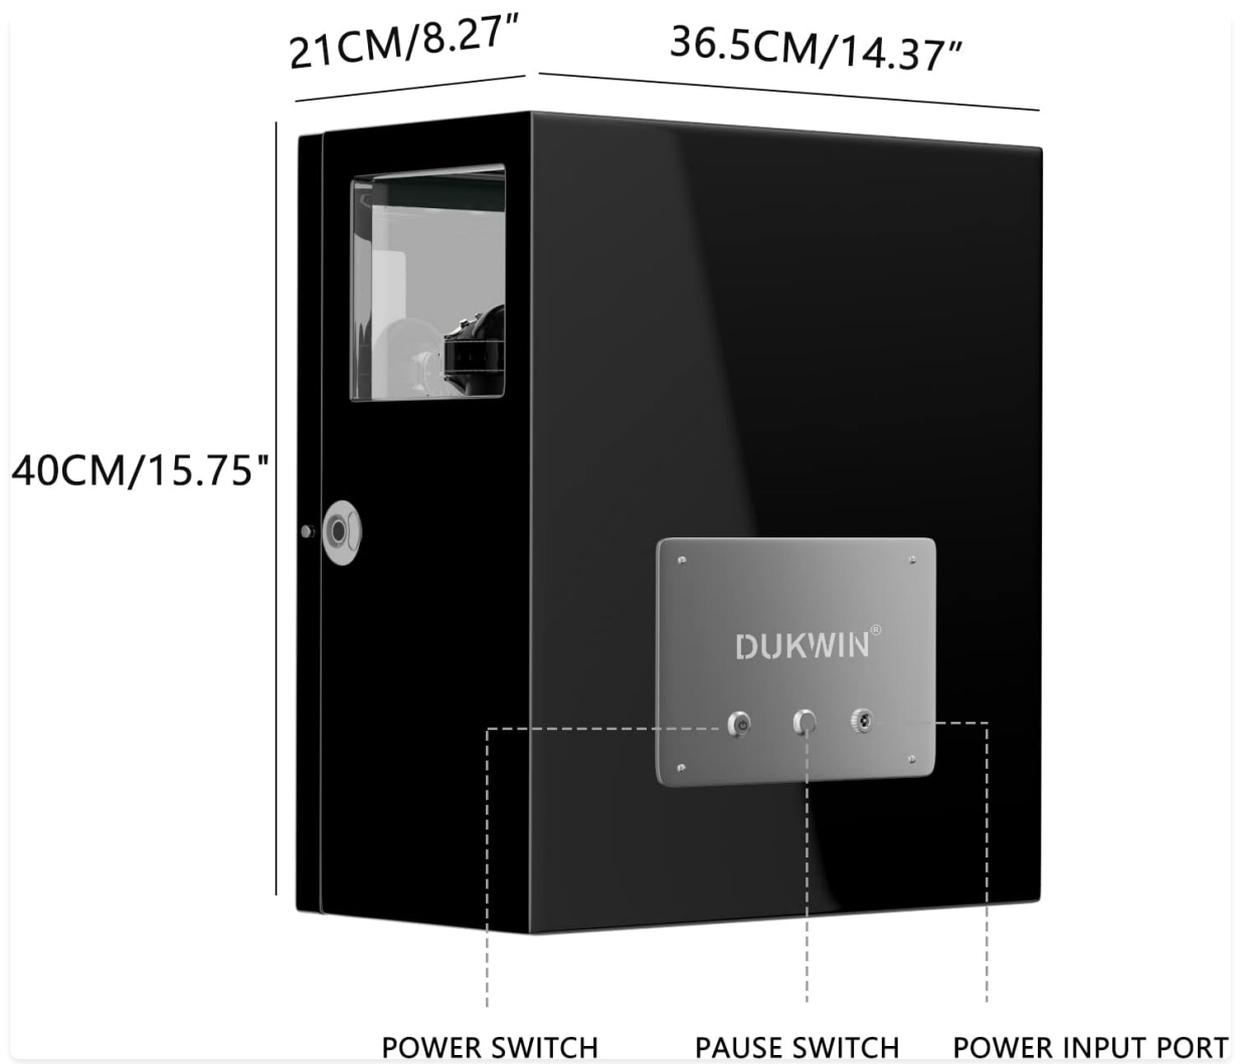


Figure 4: Watch cushion dimensions and compatible watch sizes for proper fitment.

## 5.2 LCD Touch Screen and Remote Control

The LCD touch screen allows individual control over each winding rotor. A remote control is also provided for convenient operation from a distance.

- **DIGITAL DISPLAY**
- **INDIVIDUALLY PROGRAMMABLE ROTORS**
- **VARIABLE TURNS PER DAY (300-2300TPD)**



Figure 5: The LCD touch screen provides individual control for each winding rotor and other functions.

### 5.3 Rotation Settings (TPD & Direction)

Each rotor can be programmed independently:

- **Turns-Per-Day (TPD):** Adjust the TPD from 300 to 2300. Consult your watch manufacturer's recommendations for optimal TPD.
- **Rotation Direction:** Choose from Clockwise (CW), Counter-Clockwise (CCW), or Bi-directional (alternating CW and CCW). Bi-directional settings effectively double the TPD.
- Use the LCD touch screen or remote control to select the desired TPD and rotation direction for each individual winder.

### 5.4 LED Illumination

The built-in white LED illumination can be activated via the LCD screen or remote control to highlight your watches, especially in low-light conditions.

### 5.5 Fingerprint Lock

The winder features a fingerprint lock for secure access. Follow the on-screen instructions to register your fingerprints. This prevents unauthorized access to your watches and jewelry.



Figure 6: Key features including the fingerprint lock for security and quiet operation.

## 5.6 Jewelry Storage Drawer

The bottom drawer provides additional storage for jewelry or other small accessories. Pull the drawer gently to open and push to close.

## 6. MAINTENANCE

- **Cleaning the Exterior:** Wipe the exterior with a soft, dry, lint-free cloth. For stubborn marks, slightly dampen the cloth with water and then dry thoroughly. Avoid abrasive cleaners or solvents.
- **Cleaning the Interior:** Use a soft, dry cloth to clean the interior surfaces and watch cushions.
- **Vegan Leather Care:** The interior red vegan leather can be wiped with a slightly damp cloth if necessary, then dried immediately.
- **Motor Care:** The Japanese Mabuchi motors are designed for quiet and long-lasting operation and require no special maintenance.

## 7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Winder not operating	No power; Power switch off; Pause switch engaged.	Check power adapter connection; Ensure power switch is ON; Disengage pause switch.
LCD screen not lighting up	No power; Unit is off.	Verify power connection and power switch status.
Fingerprint not recognized	Finger not properly placed; Fingerprint not registered.	Ensure finger is clean and placed correctly; Re-register fingerprint if necessary.
LED illumination not working	Light function turned off.	Activate LED illumination via LCD screen or remote control.

## 8. SPECIFICATIONS

---

- **Model Number:** YG22B-034-GN-FP
- **Brand:** DUKWIN
- **Winding Capacity:** 3 automatic watches
- **Display Capacity:** 4 static watches
- **Additional Storage:** 1 jewelry storage drawer
- **Turns-Per-Day (TPD) Range:** 300 - 2300
- **Rotation Modes:** Clockwise, Counter-Clockwise, Bi-directional
- **Motor Type:** Japanese Mabuchi Motor (Quiet operation)
- **Control:** LCD Touch Screen, Remote Control
- **Security:** Fingerprint Lock
- **Illumination:** Built-in White LED
- **Exterior Material:** 100% Handmade Wooden with Piano-Gloss Finish, Acrylic Organic Glass Window
- **Interior Material:** Red Vegan Leather
- **Package Dimensions:** 54.64 x 48.95 x 33.53 cm
- **Item Weight:** 9.56 kg

## WATCH WINDER SIZE PARAMETER



Figure 7: Dimensions of the watch winder for planning placement.

## 9. WARRANTY AND SUPPORT

DUKWIN products are manufactured with high-quality materials and undergo strict quality control. This product comes with a standard manufacturer's warranty against defects in materials and workmanship.

For warranty claims, technical support, or any inquiries regarding your DUKWIN Automatic Watch Winder, please refer to the contact information provided with your purchase or visit the official DUKWIN website.

Please retain your proof of purchase for warranty purposes.

© 2025 DUKWIN. All rights reserved.

**Related Documents - YG22B-034-GN-FP**

	<p><a href="#">DUKWIN YG22B Fingerprint Lock Series Watch Winder Owner's Manual</a></p> <p>This owner's manual provides comprehensive guidance for the DUKWIN YG22B Fingerprint Lock Series Watch Winder, covering features, operation, controls, winding modes, and safety instructions for optimal use.</p>
	<p><a href="#">DUKWIN YG22B Fingerprint Lock Series Watch Winder Owner's Manual</a></p> <p>This owner's manual provides comprehensive guidance for the DUKWIN YG22B Fingerprint Lock Series Watch Winder, covering features, operation, controls, winding modes, and safety instructions for optimal use.</p>
	<p><a href="#">secuENTRY easy 7602 FP Smart Lock System Quick Start Guide and Installation Manual</a></p> <p>Detailed guide for activating and installing the BURG-WÄCHTER secuENTRY easy 7602 FP smart lock system. Covers app setup, user management, linking units, locking plans, installation methods (screw/adhesive), and battery replacement.</p>
	<p><a href="#">Smart Lock Box User Manual: Bluetooth &amp; Fingerprint Security</a></p> <p>User manual for the Smlpretty Technology Co., Ltd Smart Lock Box (Model SMKB2-FP), featuring Bluetooth and fingerprint access. This guide details app connection via Smart Life, fingerprint setup, unlocking procedures, installation, and indicator functions. Includes product specifications and FCC compliance information.</p>
	<p><a href="#">BURG-WÄCHTER secuENTRY easy ENTRY 7602 FP: Installation and Setup Guide</a></p> <p>Comprehensive guide to installing and setting up the BURG-WÄCHTER secuENTRY easy ENTRY 7602 FP smart lock system, including cylinder and keypad installation, app configuration, user management, and troubleshooting.</p>
	<p><a href="#">LG Refrigerator Freezer User Manual</a></p> <p>Comprehensive user manual for LG Refrigerator Freezer models, covering installation, usage, safety, maintenance, specifications, and smart features. Includes troubleshooting and model-specific information.</p>