


hidalite 7506952 Led String of Lights Ledstrip Rx Line 24v lp67 **Opal Mid Instructions**


Home » hidalite » hidalite 7506952 Led String of Lights Ledstrip Rx Line 24v Ip67 Opal Mid Instructions







Artnr: IM00507 Version: 2022/03

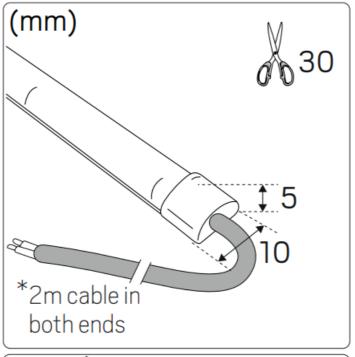

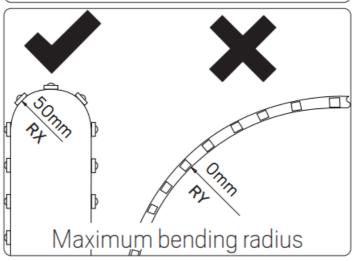

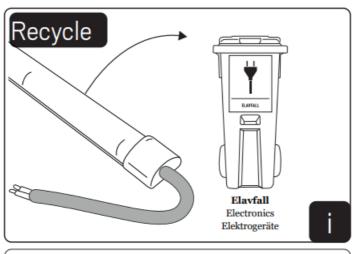



E-n	Snro	El.nr	GTIN	Lengt h	Max.Len gth	LED co lor	LED/m	Output m axim	Voltage DC
7506952 *	4143592	3216632	73929711400 49	5m	5m	2700K	512pcs	IOW	24V
7506953	4143593	3216633	73929711400 56	rm	5m	2700K	512pcs	IOW	24V
7506954 *	4143594	3216634	73929711400 63	5m	5m	3000K	512pcs	10W	24V
7506955	4143595	3216635	73929711400 70	rm	5m	3000K	512pcs	10W	24V
7506956 *	4143596	3216636	73929711400 87	5m	5m	4000K	512pcs	IOW	24V
7506957	4143597	3216637	73929711400 94	rm	5m	4000K	512pcs	10W	24V

Contents

- 1 SAFETY INSTRUCTIONS
- 2 Installation End cap
- 3 Documents / Resources
 - 3.1 References
- **4 Related Posts**

SAFETY INSTRUCTIONS


Read these instructions carefully before commencing installation and retain for future reference. The luminaire should be installed by a licensed electrician and in accordance with local regulations. Make sure that the power is off before installation or maintenance.

- The installation should be performed by a qualified electrician.
- See the table of technical specifications and follow the instructions to perform the installation in a safe and correct manner; note the recommendations for maximum lengths.
- Make sure that the LED strip's voltage corresponds with that of the drive unit and ensure that the polarity is correct.
- When two or more LED strips are interconnected, make sure the maximum recommended length is not exceeded.
- Make sure the power is switched off during installation and that the LED strips do not overlap to avoid overheating.
- It is important that the LED luminaire's maximum specified ambient temperature is taken into consideration in order to guarantee its life span, if this is exceeded, the life span can be shortened drastically.
- Use the recommended/approved assembly fittings to ensure the lifespan of the LED strip.
- The LED strip must not be switched on when rolled up.
- LEDs are sensitive components and must be treated with care and not subjected to mechanical stress.
- The flexible LED strip must not be bent more than the recommended bending radius.
- The LED chip should not be exposed to direct sunlight when switched on.


• The double-sided adhesive tape is for installing the lights, but may need to be complemented with heat-resistant silicone. When installed in the profiles (not uplight) recommends heat-resistant silicone for a permanent and sustainable installation. Do not apply silicone directly on the LED chip but along the sides.

We reserve the right to change specifications at any time.

Installation - End cap

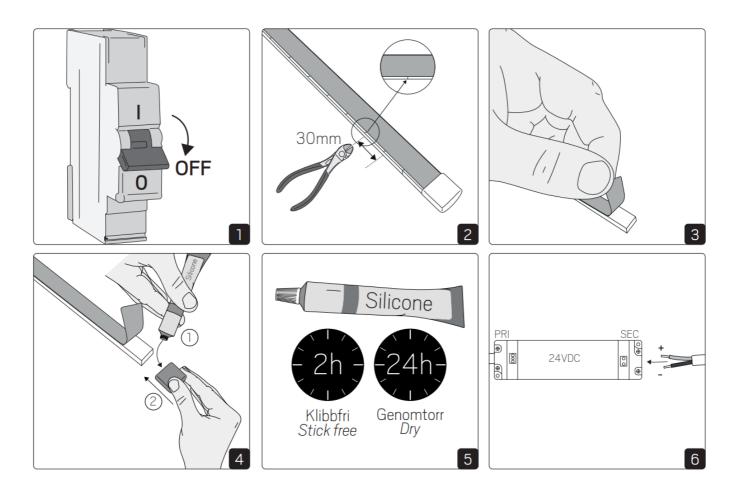

Elektro Elco AB, Tallvägen 5, SE-56435 Bankeryd, Sweden | <u>info@elco.se</u> | <u>www.hidealite.se</u> | <u>www.hidealite.uk</u> | <u>www.hidealite.uk</u> | <u>www.hidealite.dk</u>

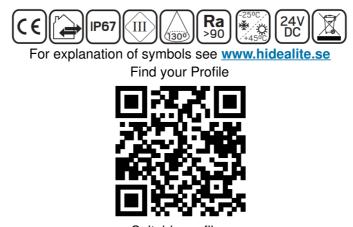

Suitable profiles at www.hidealite.com



hidalite 7506952 Led String of Lights Ledstrip Rx Line 24v lp67 Opal Mid [pdf] Instructions 7506952 Led String of Lights Ledstrip Rx Line 24v lp67 Opal Mid, 7506952, Led String of Light s Ledstrip Rx Line 24v lp67 Opal Mid, lp67 Opal Mid

References

- h LED lighting of the highest quality Hidealite
- h Vi udvikler og sælger LED belysning Hidealite
- h LED-valaisimet & LED-valaistus kotiin ja julkisiin tiloihin Hide-a-lite
- h LED-belysning, downlights, spotlights och utendørs belysning av topp kvalitet Hidealite
- h LED-belysning & LED-armaturer för ditt projekt! Hide-a-lite
- h LED lighting of the highest quality Hidealite

Manuals+,