

HIKVISION AX PRO User Guide

Home » Hikvision » HIKVISION AX PRO User Guide 🖺



AX PRO

Quick Start Guide

EN 50131-1:2006+A2:2017 EN 50131-3:2009

EN 50131-6:2017

EN 50131-5-3:2017

EN 50131-10:2014

EN 50136-2:2013

Security Grade(SG)2

Environmental Class(EC) II Certified

by Telefication

telefication


Contents


- 1 APPEARANCE
- **2 WIRING AND POWER**

ON

- 3 SET UP
- **4 INSTALLATION**
- **5 RESET**
- **6 Specification**
- 7 About this Manual
- 8 Disclaimer
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts


APPEARANCE

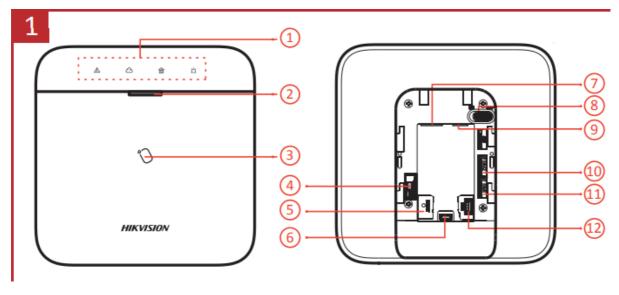


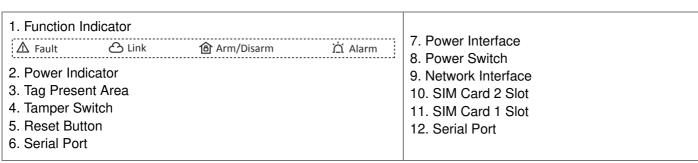

Note: the SIM card functions vary depending on the model. Note: the SIM card functions vary depending on the model.

WIRING AND POWER ON

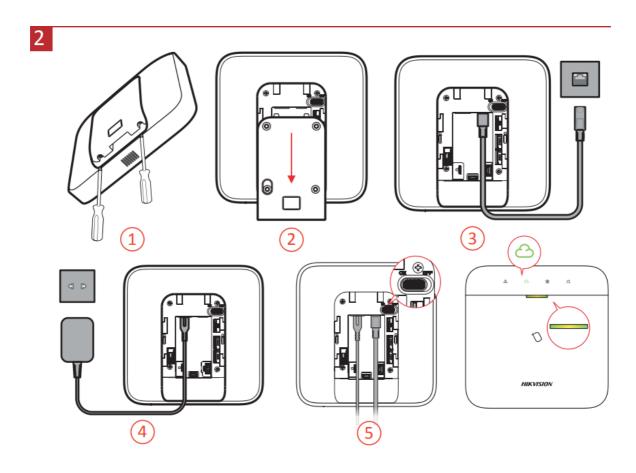

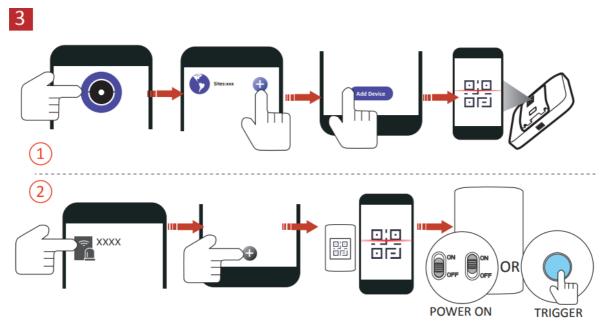


Add the AX PRO to the Hik-PRO client.


2. Enroll the peripheral to the AX PRO.

INSTALLATION



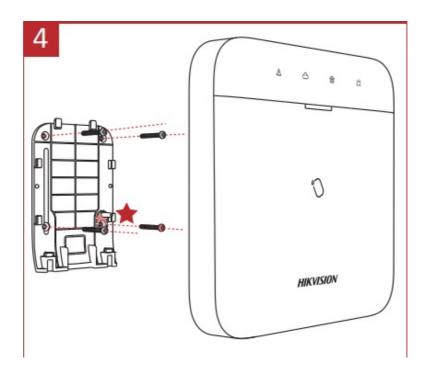

RESET

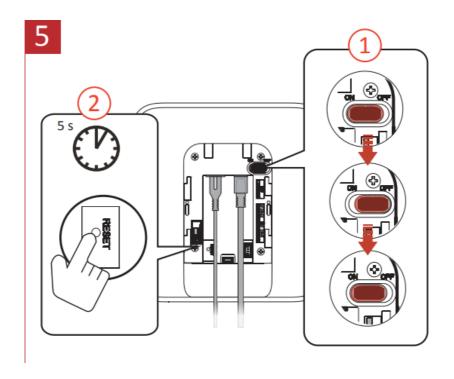

- 1. Restart the device, the power LED flashes 3 times.
- 2. Hold the reset button for 5 s.

User Manual

Scan the QR code for more information and operation help.



http://enpinfodata.hikvision.com/analysisQR/showQR/91f16b17

Specification

		AX PRO	
Basic	Parameters	64 Series 96 Series	
	RF frequency	868Mhz/865Mhz	
	Wireless zones,Relay module & wall switch	lip to 64 ,Up to 96	
	Wireless tag Reader & keypad, Tag	Up to 8, 32	Up to 8, 48
	Wireless Sounders, k ey fobs, repeaters	4, 32, 1	6, 48,4
	PIR camera	2	4
	IP camera integration	0	4 x 7s clips
User	Installer, admin, user	1, 1,30	1,1,46
software	Area	16	32
	LEDs indication	Arm/Disarm, Alarm, Tamper, Fault, Cloud, Power	
	Memory Log stored	5000 5000	
	Programming tools	HC/HC Pro/Web Portal/IVM54200	
Communicati on	LAN port	Wi-Fi(2.4G), LAN port, GPRS on board	LAN port, Wi-Fi(2.46), 3/4G on bo ard
	SIM slot	Single	Dual
	Protocal	SIA 09, Con act ID, [SUP	
Hardwear	Power supply	100 to 240 VAC	
	Battery	Built-in onboard Battery, Up to 12 hrs standby	
Approvals	EN Grade 2, CE, Rohs/Reach/WEEE		
Others	Consumption	100-240V to 50/60Hz, 0.1A-0.064A	
	Operation Environme nt	Temperature: -10°C to 50°C, Humidity: 10 to 90%	
	Dimension(W x H x D)	170.0 mm (6.71 x 170.0 (6.7") mm x 38.6 mm (1.51	
	Weight	557.5 g(19.7 oz)	

The Manual includes instructions for using and managing the Product. Pictures, charts, images, and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of this Manual at the Hikvision website (https://www.hikvision.com/).

Please use this Manual with the guidance and assistance of professionals trained in supporting the Product.

HIKVISION and other Hikvision trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned are the properties of their respective owners.

Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS MANUAL AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE.AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF

SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH

THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION, AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS. ANY

ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES. IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATTER PREVAILS.



This product and – if applicable – the sup ed with "CE" and comply therefore with the pean standards listed under the RE Directive 2014/30/EU, the RoHS Directive 2012/19/EU (WEEE directive): Products represented by the bedisposed of as unsorted municipal was proper recycling, return this product to yo hase of equivalent new equipment, or collection points. For more information se www.recyclethis.info

2006/66/EC (battery directive): This procument be disposed of as unsorted munic on. See the product documentation for sp battery is marked with this symbol, while indicate cadmium (Cd), lead (Pb), or merous For proper recycling, return the battery to display collection point. For more information see

BATTERY CAUTION



replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types);

- disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- leaving a battery in an extremely high temperature surrounding environment t hat can result in an explosion or the leakage of flammable liquid or gas; and
- a battery subjected to extremely low air pressure that may result in an explosi on or the leakage of flammable liquid or gas

Chemical burning danger

Do not swallow the battery.

Keep new and used batteries away from the children.

If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Risk of explosion if the battery is replaced by an incorrect type.

Replacement of a battery with an incorrect type that can defeat a safeguard.

Dispose of used batteries according to the instructions and local regulations.

If the battery compartment does not close securely, stop using the product and keep it away from children.

INSTALLATION CAUTION



The additional force shall be equal to three times the weight of the equipment b ut not less than 50N. The equipment and its associated mounting means shall r emain secure during the installation. After the installation, the equipment, including any associated mounting plate, shall not be damaged.

Legal and Regulatory Information



http://enpinfodata.hikvision.com/analysisQR/showQR/7f3238e5

©2020 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

Documents / Resources



HIKVISION AX PRO [pdf] User Guide AX PRO, HIKVISION, EN 50131

References

- Bienvenidos a SION | Crecemos junto a tus proyectos
- ♥ HOME
- O Hikvision US | The world's largest video surveillance manufacturer |
- O Hikvision US | The world's largest video surveillance manufacturer |

Manuals+,