



## HIKVISION Bullet Network Camera iDS-2CD7A26G0 Specifications

[Home](#) » [Hikvision](#) » HIKVISION Bullet Network Camera iDS-2CD7A26G0 Specifications 

HIKVISION Bullet Network Camera iDS-2CD7A26G0



DeepinView<sup>series</sup>

- High quality imaging with 2 MP resolution
- Excellent low-light performance via DarkFighter technology
- Clear imaging against strong back light due to 140 dB WDR technology

- License Plate Recognition
- Efficient H.265+ compression technology to save bandwidth and storage
- 5 streams to meet a wide variety of applications
- Water and dust resistant (IP67) and vandal proof (IK10)

## Contents

- [1 Function](#)
- [2 Specification](#)
- [3 Available Model](#)
- [4 Dimension](#)
- [5 Accessory](#)
  - [5.1 Optional](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)

## Function

### Road Traffic and Vehicle Detection

With embedded deep learning based license plate capture and recognition algorithms, the camera alone can achieve plate capture and recognition. The algorithm enjoys the high recognition accuracy of common plates and complex-structured plates, which is a great step forward comparing to traditional algorithms. Blocklist and allow list are available for plate categorization and separate alarm triggering.

## Specification

| Camera            |                                                                                       |
|-------------------|---------------------------------------------------------------------------------------|
| Image Sensor      | 1/1.8" Progressive Scan CMOS                                                          |
| Max. Resolution   | 1920 × 1080                                                                           |
| Min. Illumination | Color: 0.0005 Lux @ (F1.2, AGC ON);<br>B/W: 0.0001 Lux @ (F1.2, AGC ON) 0 Lux with IR |
| Shutter Time      | 1 s to 1/100,000 s                                                                    |
| Day & Night       | IR cut filter<br>Blue glass module to reduce ghost phenomenon                         |

|                        |                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Lens</b>            |                                                                                                                                                                                                                    |
| Focal Length & FOV     | 2.8 to 12 mm, horizontal FOV: 114.5° to 41.8°, vertical FOV: 59.3° to 23.6°, diagonal FOV: 141.1° to 48°<br>8 to 32 mm, horizontal FOV: 42.5° to 15.1°, vertical FOV: 23.3° to 8.64°, diagonal FOV: 49.6° to 17.3° |
| Focus                  | Auto, semi-auto, manual                                                                                                                                                                                            |
| Iris Type              | P-iris                                                                                                                                                                                                             |
| Aperture               | 2.8 to 12 mm: F1.2 to F2.5<br>8 to 32 mm: F1.7 to F1.73                                                                                                                                                            |
| <b>Illuminator</b>     |                                                                                                                                                                                                                    |
| Supplement Light Type  | IR                                                                                                                                                                                                                 |
| Supplement Light Range | 2.8 to 12 mm: 50 m<br>8 to 32 mm: 100 m                                                                                                                                                                            |
| Smart Supplement Light | Yes                                                                                                                                                                                                                |
| IR Wavelength          | 850 nm                                                                                                                                                                                                             |
| <b>Video</b>           |                                                                                                                                                                                                                    |
| Main Stream            | 50 Hz: 25 fps (1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 720)                                                                                                                                 |

|                             |                                                                                                                                |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Sub-Stream                  | 50 Hz: 25 fps (704 × 576, 640 × 480)<br>60 Hz: 30 fps (704 × 480, 640 × 480)                                                   |
| Third Stream                | 50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480) |
| Fourth Stream               | 50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480) |
| Fifth Stream                | 50 Hz: 25 fps (704 × 576, 640 × 480)<br>60 Hz: 30 fps (704 × 480, 640 × 480)                                                   |
| Video Compression           | Main stream: H.265+/H.265/H.264+/H.264<br>Sub-stream/Third stream/Fourth stream/Fifth stream: H.265/H.264/MJPEG                |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                              |
| H.264 Type                  | Baseline Profile/Main Profile/High Profile                                                                                     |
| H.265 Type                  | Main Profile                                                                                                                   |
| Bit Rate Control            | CBR/VBR                                                                                                                        |
| Scalable Video Coding (SVC) | H.265 and H.264 encoding                                                                                                       |
| Region of Interest (ROI)    | 4 fixed regions for each stream                                                                                                |
| Target Cropping             | Yes                                                                                                                            |

|                             |                                                                                                                                                               |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Audio</b>                |                                                                                                                                                               |
| Audio Type                  | Mono sound                                                                                                                                                    |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/AAC/MP3                                                                                                                         |
| Audio Bit Rate              | 64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/16 to 64 Kbps (AAC)/8 to 320 Kbps (MP3)                                              |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/44.1 KHz/48 kHz                                                                                                                           |
| Environment Noise Filtering | Yes                                                                                                                                                           |
| <b>Network</b>              |                                                                                                                                                               |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, SFTP, SRTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP,<br>PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS |
| Simultaneous Live View      | Up to 20 channels                                                                                                                                             |
| API                         | Open Network Video Interface (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP                                                                              |
| User/Host                   | Up to 32 users. 3 user levels: administrator, operator and user                                                                                               |

|                          |                                                                                                                                                                                                                                                                                                                                            |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security                 | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP OVER HTTPS, Control Timeout Settings, Security Audit Log, TLS 1.2 |
| Network Storage          | NAS (NFS, SMB/CIFS), auto network replenishment (ANR) Together with high-end Hikvision memory card, memory card encryption and health detection are supported                                                                                                                                                                              |
| Client                   | iVMS-4200, Hik-Connect, Hik-Central                                                                                                                                                                                                                                                                                                        |
| Web Browser              | Plug-in required live view: IE8+<br>Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Safari 11+ Local service: Chrome 41.0+, Firefox 30.0+                                                                                                                                                                                             |
| <b>Image</b>             |                                                                                                                                                                                                                                                                                                                                            |
| Image Parameters Switch  | Yes                                                                                                                                                                                                                                                                                                                                        |
| Image Settings           | Saturation, brightness, contrast, sharpness, gain, white balance adjustable by client software or web browser                                                                                                                                                                                                                              |
| Day/Night Switch         | Day, Night, Auto, Schedule, Alarm Trigger, Video Trigger                                                                                                                                                                                                                                                                                   |
| Wide Dynamic Range (WDR) | 140 dB                                                                                                                                                                                                                                                                                                                                     |
| SNR                      | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                    |
| Image Enhancement        | BLC, HLC, Defog, 3D DNR                                                                                                                                                                                                                                                                                                                    |
| Picture Overlay          | LOGO picture can be overlaid on video with 128 × 128 24bit bmp format                                                                                                                                                                                                                                                                      |

|                     |                                                                                                                                                                                                   |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Stabilization | EIS                                                                                                                                                                                               |
| <b>Interface</b>    |                                                                                                                                                                                                   |
| Video Output        | 1 Vp-p Composite Output (75 $\Omega$ /CVBS) (Only for debugging)                                                                                                                                  |
| Ethernet Interface  | 1 RJ45 10 M/100 M/1000 M self-adaptive Ethernet port                                                                                                                                              |
| On-Board Storage    | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 256 GB                                                                                                                 |
| Audio               | With -Y: 1 input (line in), 1 output (line out), 3.5 mm connector                                                                                                                                 |
| Alarm               | 2 input, 2 outputs (max. 24 VDC, 1 A)                                                                                                                                                             |
| RS-485              | With -Y: 1 RS-485 (half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive)                                                                                                                       |
| Reset Key           | Yes                                                                                                                                                                                               |
| Power Output        | With -Y: 12 VDC, max. 100 mA                                                                                                                                                                      |
| <b>Event</b>        |                                                                                                                                                                                                   |
| Basic Event         | Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, abnormal reboot, HDD full, HDD error), video quality diagnosis, vibration detection |

|                                    |                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Smart Event                        | <p>Intrusion detection, scene change detection, audio exception detection, defocus detection</p> <p>Line crossing detection, up to 4 lines configurable</p> <p>Intrusion detection, up to 4 regions configurable</p> <p>Region entrance detection, up to 4 regions configurable</p> <p>Region exiting detection, up to 4 regions configurable</p>                         |
| Linkage                            | <p>Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger alarm output, trigger recording, trigger capture</p> <p>Trigger recording: memory card, network storage, pre-record and post-record</p> <p>Trigger captured pictures uploading: FTP, SFTP, HTTP, NAS, send email</p> <p>Trigger notification: HTTP, ISAPI, alarm output, send email</p> |
| <b>Deep Learning Function</b>      |                                                                                                                                                                                                                                                                                                                                                                           |
| Perimeter Protection               | <p>Line crossing, intrusion, region entrance, region exiting</p> <p>Support alarm triggering by specified target types</p>                                                                                                                                                                                                                                                |
| Road Traffic and Vehicle Detection | <p>Blocklist and allow list: up to 10,000 records</p> <p>Captures vehicle that has no license plate</p> <p>Support license plate recognition of motorcycles (only in checkpoint scenario)</p> <p>Support vehicle attribute detection, including vehicle type, color, brand, etc. (City Street mode is recommended.)</p>                                                   |
| <b>General</b>                     |                                                                                                                                                                                                                                                                                                                                                                           |
| Power                              | <p>12 VDC <math>\pm</math> 20%, 1.19 A, max. 14.28 W, three-core terminal block</p> <p>PoE: 802.3at, Type 2, Class 4, 42.5 V to 57 V), 0.396 A to 0.295 A, max. 16.8 W</p>                                                                                                                                                                                                |
| Dimension                          | <p>Without -Y: <math>\varnothing 144 \times 347</math> mm (<math>\varnothing 5.7'' \times 13.7''</math>)</p> <p>With -Y: <math>\varnothing 140 \times 351</math> mm (<math>\varnothing 5.5'' \times 13.8''</math>)</p>                                                                                                                                                    |
| Package Dimension                  | 405 $\times$ 190 $\times$ 180 mm (15.9" $\times$ 7.5" $\times$ 7.1")                                                                                                                                                                                                                                                                                                      |
| Weight                             | Approx. 1950 g (4.2 lb.)                                                                                                                                                                                                                                                                                                                                                  |



|                                  |                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| With Package Weight              | Approx. 3070 g (6.7 lb.)                                                                                                                                                                                                                                                                                                                                |
| Storage Conditions               | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                               |
| Startup and Operating Conditions | -40 °C to 60 °C (-40 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                               |
| Language                         | 33 languages<br>English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| General Function                 | Anti-flicker, 5 streams, EPTZ, heartbeat, mirror, privacy mask, flash log, password reset via email, pixel counter                                                                                                                                                                                                                                      |
| Heater                           | Yes                                                                                                                                                                                                                                                                                                                                                     |
| <b>Approval</b>                  |                                                                                                                                                                                                                                                                                                                                                         |
| EMC                              | FCC (47 CFR Part 15, Subpart B);<br>CE-EMC (EN 55032: 2015, EN 61000-3-2:2019, EEN 61000-3-3:2013+A1:2019, EN 50130-4: 2011 +A1: 2014);<br>RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 7);<br>KC (KN 32: 2015, KN 35: 2015)                                                                                                                        |
| Safety                           | UL (UL 62368-1);<br>CB (IEC 62368-1:2014+A11);<br>CE-LVD (EN 62368-1:2014/A11:2017);<br>BIS (IS 13252(Part 1):2010/ IEC 60950-1 : 2005); LOA (IEC/EN 60950-1)                                                                                                                                                                                           |
| Environment                      | CE-RoHS (2011/65/EU); WEEE (2012/19/EU);<br>Reach (Regulation (EC) No 1907/2006)                                                                                                                                                                                                                                                                        |


|                           |                                              |
|---------------------------|----------------------------------------------|
| Protection                | IK10 (IEC 62262:2002), IP67 (IEC 60529-2013) |
| Anti-Corrosion Protection | With -Y: NEMA 4X(NEMA 250-2018)              |
| Automotive and Railway    | EN50121-4                                    |
| Other                     | PVC FREE                                     |

Available Model


- iDS-2CD7A26G0/P-IZHSY (2.8 to 12 mm, 8 to 32 mm)
- iDS-2CD7A26G0/P-IZHS (2.8 to 12 mm, 8 to 32 mm)

Dimension

-Y model:

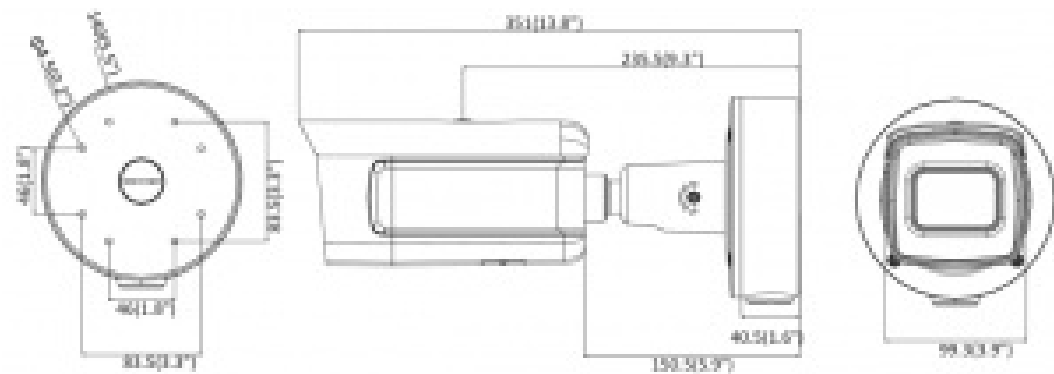

Without -Y model:

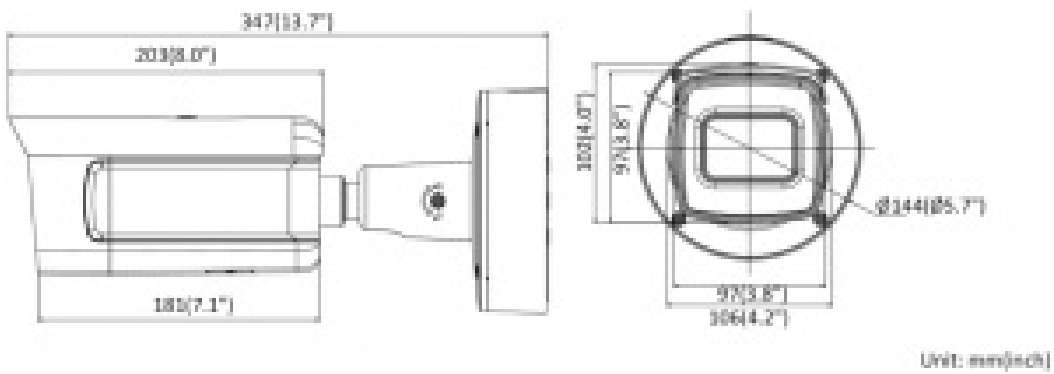

Accessory

## Optional

| DS-1475ZJ-Y<br>Vertical Pole Mount                                                | DS-1475ZJ- SUS<br>Vertical Pole Mount                                             | DS-2251ZJ<br>Pendant Mount                                                        | DS-1476ZJ-Y<br>Corner Mount                                                        | DS-1476ZJ-SUS<br>Corner Mount                                                       |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |

### Headquarters

No.555 Oianmo Road, Binjiang District,  
Hangzhou 310051. China

T +86-571-8807-5998

[overseasbusiness@hikvision.com](mailto:overseasbusiness@hikvision.com)

### Hikvision USA

T +1-909-895-0400

[sales.usa@hikvision.com](mailto:sales.usa@hikvision.com)

### Hikvision Australia

T +61-2-8599-4233

[salesau@hikvision.com](mailto:salesau@hikvision.com)

### Hikvision India

T +91-22-28469900

[sales@pramahikvision.com](mailto:sales@pramahikvision.com)

### Hikvision Canada

T + 1-866-200-6690  
[sales.canada@hikvision.com](mailto:sales.canada@hikvision.com)

**Hikvision Thailand**  
T +662-275-9949  
[sales.thailand@hikvision.com](mailto:sales.thailand@hikvision.com)

**Hikvision Europe**  
T +31-23-5542770  
[sales.eu@hikvision.com](mailto:sales.eu@hikvision.com)

**Hikvision Italy**  
T +39-0438-6902  
[info.it@hikvision.com](mailto:info.it@hikvision.com)

**Hikvision Brazil**  
T +55 11 3318-0050  
[Latam.support@hikvision.com](mailto:Latam.support@hikvision.com)

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
[sales.tr@hikvision.com](mailto:sales.tr@hikvision.com)

**Hikvision Malaysia**  
T +601-7652-2413  
[sales.my@hikvision.com](mailto:sales.my@hikvision.com)

**Hikvision UAE**  
T +971-4-4432090  
[salesme@hikvision.com](mailto:salesme@hikvision.com)

**Hikvision Singapore**  
T +65-6684-4718  
[sg@hikvision.com](mailto:sg@hikvision.com)

**Hikvision Spain**  
T +34-91-737-16-55  
[info.es@hikvision.com](mailto:info.es@hikvision.com)

**Hikvision Tashkent**  
T +99-87-1238-9438  
[uzb@hikvision.ru](mailto:uzb@hikvision.ru)

**Hikvision Hong Kong**  
T +852-2151-1761  
[info.hk@hikvision.com](mailto:info.hk@hikvision.com)

**Hikvision Russia**  
T +7-495-669-67-99  
[saleru@hikvision.com](mailto:saleru@hikvision.com)

**Hikvision Korea**  
T +82-(0)31-731-8817

[sales.korea@hikvision.com](mailto:sales.korea@hikvision.com)

**Hikvision Poland**

T +48-22-460-01-50

[info.pl@hikvision.com](mailto:info.pl@hikvision.com)

**Hikvision Indonesia**

T +62-21-2933759

[Sales.Indonesia@hikvision.com](mailto:Sales.Indonesia@hikvision.com)

**Hikvision Colombia**

[sales.colombia@hikvision.com](mailto:sales.colombia@hikvision.com)



**Documents / Resources**



[HIKVISION Bullet Network Camera iDS-2CD7A26G0](#) [pdf] Specifications  
HIKVISION, Bullet Network Camera, iDS-2CD7A26G0, 2 MP ANPR IR V

**References**

- [USB IP Hikvision iDS-2CD7A26G0/P-IZHY 2MP Varifocal ANPR Bullet Network Camera](#)

[Manuals+](#)