



HIKVISION DS-2CD2146G2-I(SU) AcuSense 4 MP IR Fixed Dome Network Camera User Guide

[Home](#) » [Hikvision](#) » HIKVISION DS-2CD2146G2-I(SU) AcuSense 4 MP IR Fixed Dome Network Camera User Guide 

HIKVISION



AcuSense 4 MP IR Fixed Dome Network Camera



- High quality imaging with 4 MP resolution
- Excellent low-light performance with powered-by-DarkFighter technology
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to 120 dB true WDR technology
- False alarm reduction through human and vehicle target classification based on deep learning
- -ISU: Water and dust resistant (IP66) and vandal-resistant (IK10); -I: Water and dust resistant (IP67) and



vandal-resistant (IK10)

- -ISU: built-in microphone for real-time auto security
- 3D DNR technology delivers clean and sharp images

Contents

- [1 AcuSense](#)
- [2 Specification](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)



AcuSense

Empowered by deep learning algorithms, Hikvision AcuSense technology brings human or vehicle target classification alarms to front- and back-end devices. The system can greatly reduce false alarms generated by targets other than humans or vehicles, vastly improving alarm efficiency and effectiveness.



www.hikvision.com

Specification

Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. Illumination	Color: 0.003 Lux @ (F1.4, AGC ON)
Shutter Speed	1/3 s to 1/100,000 s
Day & Night	ICR Cut
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Slow Shutter	Yes
P/N	P/N
Wide Dynamic Range	120 dB
Lens	

Lens Type & FOV	2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° 6 mm, horizontal FOV 53°, vertical FOV 28°, diagonal FOV 62°
Aperture	F1.4
Lens Mount	M12
Aperture Type	Fixed
Illuminator	
IR Range	Up to 30 m
Wavelength	850 nm
Smart Supplement Light	Yes
Supplement Light	IR
Video	
Max. Resolution	2592 × 1944
Main Stream	50Hz: 20fps (2592 × 1944) 25fps (2688 × 1520, 2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20fps (2944 × 1656) 30fps (2688 × 1520, 2304 × 1296, 1920 × 1080, 1280 × 720)
Sub Stream	50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)
Third Stream	50Hz: 25fps (1280 × 720, 640 × 480, 640 × 360, 360 × 240) 60Hz: 30fps (1280 × 720, 640 × 480, 640 × 360, 360 × 240)
Video Compression	Mainstream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
H.264+	Main Stream supports
H.265+	Main Stream supports
Bit Rate Control	CBR/VBR
Scalable Video Coding (SVC)	Yes
Region of Interest (ROI)	1 fixed regions for each stream

Audio	
Environment Noise Filtering	Yes

Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
Audio Compression	G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3
Audio Bit Rate	64Kbps(G.711ulaw/G.711alaw)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2)/ 8-320Kbps(MP3)
Network	
Simultaneous Live View	Up to 6 channels
API	ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS
Smooth Streaming	Yes
User/Host	Up to 32 users. 3 user levels: administrator, operator, and user
Security	Password protection, complicated password, HTTPS encryption, IP address filter, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.2, WSSE, and digest authentication for ONVIF
Network Storage	microSD/SDHC/SDXC card (256 GB) local storage, and NAS (NFS, SMB/CIFS), auto network replenishment (ANR) Together with high-end Hikvision memory card, memory card encryption and health detection are supported
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	Plug-in required live view: IE8+, Chrome 41.0-44, Firefox 30.0-51, Safari 8.0-11 Plug-in free live view: Chrome 57.0+, Firefox 52.0+
Image	
Day/Night Switch	Day, Night, Auto, Schedule
Image Enhancement	BLC, HLC, 3D DNR
Image Parameters Switch	Yes
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance adjustable by client software or web browser
Interface	

Alarm	-ISU: 1 input, 1 output (max. 12 VDC @30 mA)
Audio	-ISU: 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 K Ω , interface type: non-equilibrium; 1 output (line out), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 100 Ω , interface type: non-equilibrium
On-board Storage	Built-in micro SD slot, up to 256 GB
Hardware Reset	Yes
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Intelligent (Traditional Algorithm)	
Basic Event	Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error), scene change detection
Intelligent (Deep Learning Algorithm)	
Face Capture	Yes
Premier Protection	Line crossing detection, intrusion detection, region entrance detection, region exiting detection
General	
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Power Supply	12 VDC $\pm$ 25%, reverse polarity protection PoE: 802.3af, class 3
Power Consumption and Current	12 VDC, 0.45 A, max. 5.4 W PoE: (802.3af, 36 V to 57 V), 0.2 A to 0.1 A, max. 6.5 W
Power Interface	Ø5.5 mm coaxial power plug
Material	Metal upper cover and base
Camera Dimension	Ø121 × 92 mm (4.8" × 3.6")


Package Dimension	150 × 150 × 141 mm (5.9" × 5.9" × 5.6")
Camera Weight	585 g (1.3 lb.)
With Package Weight	836 g (1.8 lb.)
Linkage Method	Upload to NAS/memory card, notify surveillance center, trigger record, trigger capture , strobe light, audible warning *Note: External device is required.
Web Client Language	32 languages English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil)
General Function	Anti-flicker, heartbeat, mirror, privacy masks, flash log, password reset via e-mail, pixel counter
Software Reset	Yes
Approval	
EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014); RCM (AS/NZS CISPR 32: 2015) ; IC(ICES-003: Issue 6, 2016); KC (KN 32: 2015, KN 35: 2015)
Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013); BIS (IS 13252(Part 1):2010+A1:2013+A2:2015); LOA (IEC/EN 60950-1)
Environment	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
Protection	-ISU: Ingression protection: IP66 (IEC 60529-2013), IK10 (IEC 62262:2002) -I: Ingression protection: IP67 (IEC 60529-2013), IK10 (IEC 62262:2002)

Available Model

DS-2CD2146G2-I(2.8 mm, 4 mm, 6 mm)

DS-2CD2146G2-ISU(2.8 mm, 4 mm, 6 mm)

▪ Dimension

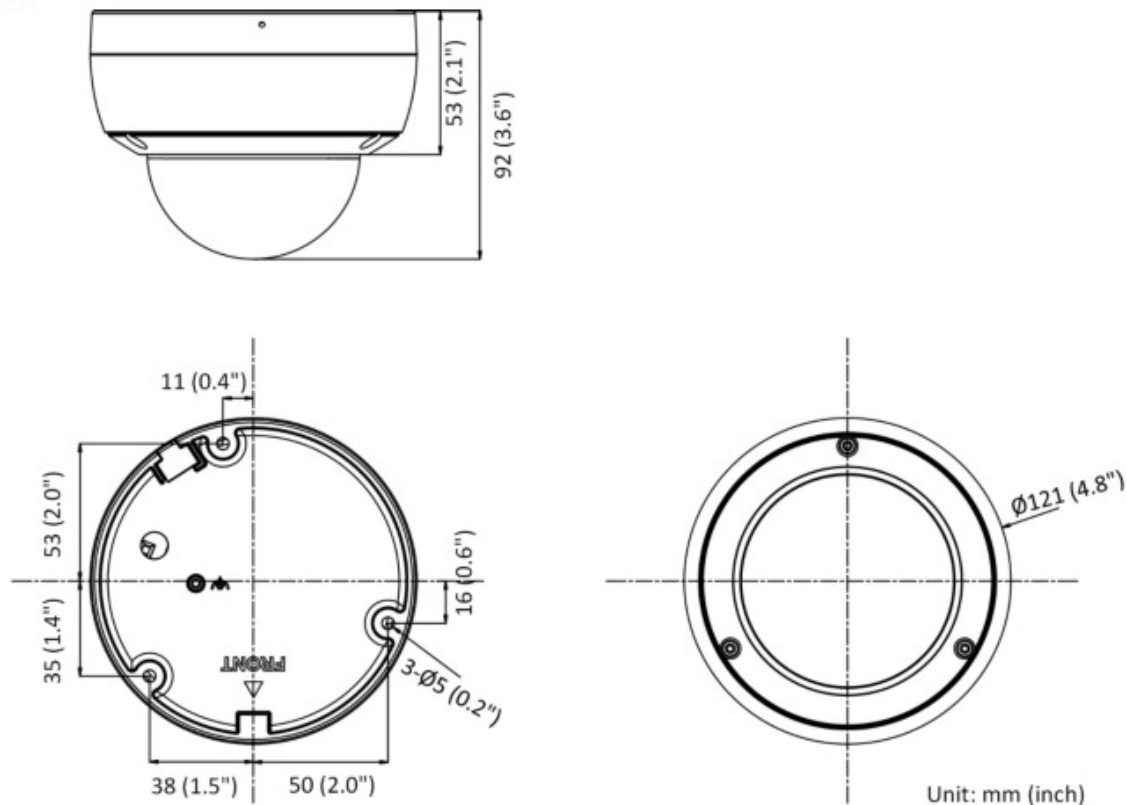

▪ Accessory



DS-1271ZJ-120
Pendent Mount



DS-1272ZJ-120B
Wall Mount



DS-1272ZJ-120
Wall Mount



DS-1276ZJ-SUS
Corner Mount



DS-1275ZJ-SUS
Vertical Pole Mount



DS-1253ZJ-M
Rain Shade for Outdoor
Dome Camera



DS-1280ZJ-DM46
Junction Box

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District
Hangzhou 310051, China
T +86-571-8807-5998

overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com	Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com
Envision Australia T +61-2-8599-4233 salesau@hikvision.com	Hikvision South Africa Tel: +27 (101 0351172 sale.africa@hikvision.com
Hikvision India T +91-22-28469900 sales@pramahikvision.com	Hikvision France T +33(011-85-330-450 infofr@hikvision.com
Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com	Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru
Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com	Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com
Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com	Hikvision UAE T +971-4-4432090 salesme@hikvision.com
Hikvision Italy T +39-0438-6902 info.it@hikvision.com	Hikvision Singapore T +65-6684-4718 sg@hikvision.com
Hikvision Brazil T +5511 3318-0050 Latam.support@hikvision.com	Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com
Hikvision Turkey T +90 1216)521 7070- 7074 sales.tr@hikvision.com	Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru
Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com	Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com
Hikvision Russia T +7-495-669-67-99 sateru@hikvision.com	Hikvision Indonesia T +62-21-2933759 Satesindonesia@hikvision.com
Hikvision Korea T +82-10131-731-8817 sales.korea@hikvision.com	Hikvision Colombia sales.colombia@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com	
--	--

© Hikvision Digital Technology Co., Ltd. 2019 | Data subject to change without notice |

Documents / Resources



[HIKVISION DS-2CD2146G2-I\(SU\) AcuSense 4 MP IR Fixed Dome Network Camera](#) [pdf] User Guide
DS-2CD2146G2-I SU, AcuSense 4 MP IR Fixed Dome Network Camera

References

- [Use IP Hikvision DS-2CD2146G2-ISU/B 4MP AcuSense Fixed Dome Network Camera With Built-in Microphone Black](#)

[Manuals+](#).