



HIKVISION DS-2CD2347G2-LSU/SL 4 MP ColorVu Strobe Light and Audible Warning Fixed Turret Network Camera Instructions

[Home](#) » [Hikvision](#) » HIKVISION DS-2CD2347G2-LSU/SL 4 MP ColorVu Strobe Light and Audible Warning Fixed Turret Network Camera Instructions 

HIKVISION



DS-2CD2347G2-LSU/SL
4 MP ColorVu Strobe Light and Audible Warning Fixed Turret Network Camera

ColorVu



Hikvision ColorVu technology provides 24/7 vivid colorful images with F1.0 advanced lenses and high-performance sensors. F1.0 super-aperture collects more light to produce brighter images. Advanced sensor technology can vastly improve the utilization of available light.

- High-quality imaging with 4 MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong backlight due to 130 dB WDR technology
- Focus on human and vehicle targets classification based on deep learning
- 24/7 colorful imaging
- Active strobe light and audio alarm to warn intruders off
- Provide real-time security via built-in two-way audio
- Audio and alarm interface available
- Water and dust resistant (IP67)



Contents

[1 Specification](#)

[2 Documents /
Resources](#)

[2.1 References](#)

[3 Related Posts](#)

Specification

Camera	
Image Sensor	1/1.8" Progressive Scan CMOS
Min. Illumination	Color: 0.0005 Lux @ (F1.0, AGC ON), B/W: 0 Lux with white light
Shutter Speed	1/3 s to 1/100,000 s
Slow Shutter	Yes
Wide Dynamic Range	130 dB
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°
Lens	
Focal Length & FOV	2.8 mm, horizontal FOV 111.9°, vertical FOV 60.5°, diagonal FOV 133.6° 4 mm, horizontal FOV 95.2°, vertical FOV 50.6°, diagonal FOV 114.7°
Lens Mount	M16
Aperture	F1.0
Depth of Field	2.8 mm: 3.1 m to ∞ 4 mm: 5.4 m to ∞
DORI	
DORI	2.8 mm, D: 58.2 m, O: 23.1 m, R: 11.6 m, I: 5.8 m 4 mm, D: 77 m, O: 30.5 m, R: 15.4 m, I: 7.7 m
Illuminator	
Smart Supplement Light	Yes
White Light Range	Up to 30 m
Visual Alarm	Yes
Video	
Max. Resolution	2688 × 1520

Main Stream	50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Third Stream	50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) *Third stream is supported under certain settings.
Video Compression	Mainstream: H.265/H.264/H.265+/H.264+ Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264 * the Third stream is supported under certain settings.
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
H.264+	Mainstream supports
H.265+	Mainstream supports
Bit Rate Control	CBR/VBR
Scalable Video Coding (SVC)	H.265 and H.264 encoding
Region of Interest (ROI)	1 fixed region for mainstream and sub-stream

Audio	
Audio Compression	G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3/AAC
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC)
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
Environment Noise Filtering	Yes
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, ARP
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK
User/Host	Up to 32 users. 3 user levels: administrator, operator and user


Security	Password protection, complicated password, HTTPS encryption, IP address filter, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface
Network Storage	NAS (NFS, SMB/CIFS), auto network replenishment (ANR), MicroSD/SDHC/SDXC card (256 GB) local storage Together with high-end Hikvision memory card, memory card encryption and health detection are supported
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	Plug-in required live view: IE 10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+
Image	
Image Parameters Switch	Yes
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance adjustable by client software or web browser
Day/Night Switch	Auto, Schedule
SNR	≥ 52 dB
Image Enhancement	BLC, HLC, 3D DNR
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/SDHC/SDXC slot, up to 256 GB
Built-in Microphone	Yes
Built-in Speaker	1.2 W, 10 cm: 95 dB
Audio	1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 K Ω , interface type: non-equilibrium 1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω , interface type: non-equilibrium
Alarm	1 input, 1 output (max. 24 VDC/24 VAC, 1 A)
Hardware Reset	Yes
Event	
Basic Event	Motion detection (human and vehicle targets classification), video tampering alarm, exception
Smart Event	Scene change detection

Deep Learning Function	
Face Capture	Yes
Perimeter Protection	Line crossing detection, intrusion detection, region entrance detection, region exiting detection Supports human and vehicle targets classification
General	
Linkage Method	Upload to NAS/memory card/FTP, notify surveillance center, trigger recording, trigger capture, send email, strobe light, audible warning, trigger alarm output
Camera Material	Aluminum alloy body
Camera Dimension	Ø138.3 mm × 115.4 mm (Ø5.4" × 4.5")
Package Dimension	170 mm × 170 mm × 150 mm (6.7" × 6.7" × 5.9")
Camera Weight	Approx. 760 g (1.7 lb.)
With Package Weight	Approx. 1040 g (2.3 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Web Client Language	33 languages English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian
General Function	Anti-flicker, heartbeat, mirror, privacy mask, flash log, password reset via email, pixel counter
Firmware Version	V5.5.114
Software Reset	Yes
Power Consumption and Current	12 VDC, 0.54 A, max. 6.5 W PoE (802.3af, 36 V to 57 V), 0.22 A to 0.14 A, max. 8 W
Power Supply	12 VDC ± 25% PoE: 802.3af, Class 3
Power Interface	Ø5.5 mm coaxial power plug
Approval	
EMC	FCC SDoC: 47 CFR Part 15, Subpart B; CE-EMC: EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014; RCM: AS/NZS CISPR 32: 2015; IC VoC: ICES-003: Issue 6, 2016; KC: KN 32: 2015, KN 35: 2015
Safety	UL: UL 60950-1; CB: IEC 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014; CE-LVD: EN 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014; LOA: IEC/EN 60950-1
Environment	CE-RoHS: 2011/65/EU; WEEK : 2012/19/EU; Reach: Regulation (EC) No 1907/2006


Protection	IP67: IEC 60529-2013
------------	----------------------

Available Model
DS-2CD2347G2-LSU/SL (2.8/4 mm)

• Dimension

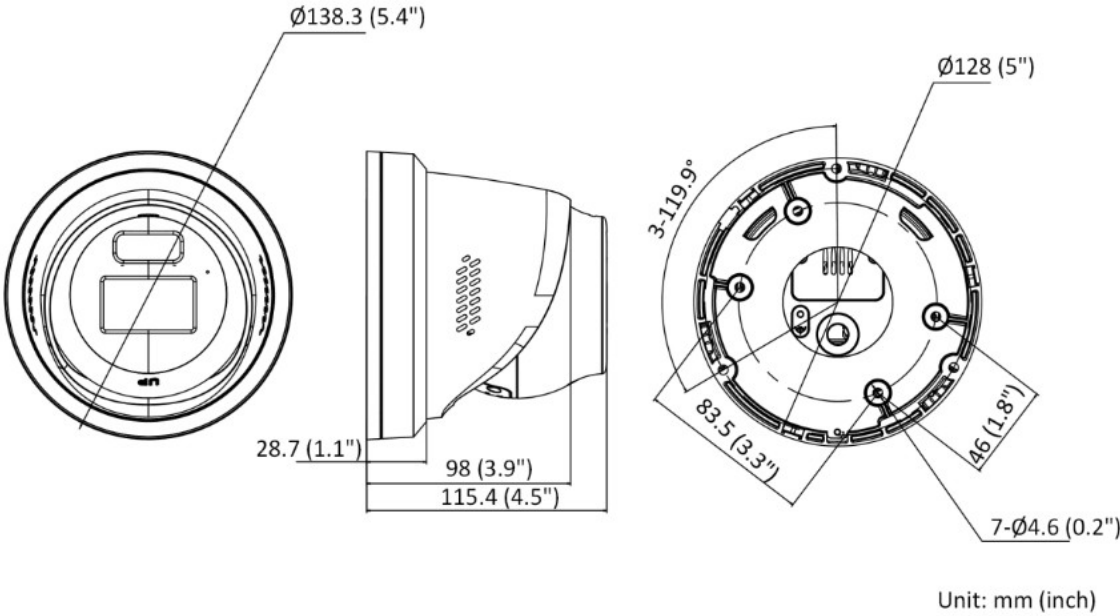

- Accessory
- Optional

DS-1276ZJ-SUSC corner Mount	DS-1273ZJ-140B Wall Mount	DS-1275ZJ-SUS Vertical PoleMount	DS-1273ZJ-140 Wall Mount	DS-1271ZJ Pendant Mount
				

HIKVISION

Headquarters
No.555 Qianmo Road Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sates.usa@hikvision.com	Hikvislon Europe T +31-23-5542770 sales.eu@hikvision.com
Hikvislon Australia T +61-2-8599-4233 salesau@hikvision.com	Hikvislon Italy T +39-0438-6902 infoit@hikvision.com
Hikvision India T +91-22-28469900 sales@pramahikvision.com	Hikvislon Brazil T +55 11 3318-0050 Latam.support@hikvision.com
Hikvislon Canada T+1-866-200-6690 sales.canada@hikvision.com	Hikvision Turkey T +90 (2161521 7070- 7074 sates.tr@hikvision.com
Hikvislon Thailand T +662-275-9949 sales.thailand@hikvision.com	Hikvislon Malaysia T +601-7652-2413 Sales.my@hikvision.com
Hikvislon UK S Ireland T +01628-902140 sales.uk@hikvision.com	Hikvislon UAE T +971-4-4432090 salesme@hikvision.com
Hikvision South Attica Tel: +271101 0351172 sale.africa@hikvision.com	Hikvislon Singapore T +65-6684-4718 sg@hikvision.com
Hikvislon France T +331011-85-330-450 info.r@hikvision.com	Hikvislon Spain +34-91-737-16-55 info.es@hikvision.com
Hikvislon Kazakhstan T +7-727-9730667 nikia.pantilov@hikvision.ru	Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru
Hikvislon Vietnam T +84-974270888 Sales.vt@hikvision.com	Hikvislon Hong Kong +852-2151-1761 into.hk@hikvision.com
Hikvislon Russia T +7-495-669-67-99 saieru@hikvision.com	Hikvision Indonesia T +62-21-2933759 Salesindonesia@hilwision.com
Hikvislon Korea T +82-10131-731-8817 sales.korea@hiladsion.com	Hikvision Colombia sales.colombia@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |

Documents / Resources



[HIKVISION DS-2CD2347G2-LSU/SL 4 MP ColorVu Strobe Light and Audible Warning Fixed Turret Network Camera](#) [pdf] Instructions
DS-2CD2347G2-LSU SL, 4 MP ColorVu Strobe Light and Audible Warning Fixed Turret Network Camera

References

- [Hikvision DS-2CD2347G2-LSU/SL 4MP Fixed Turret Camera with Live-Guard](#)