

Contents [[hide](#)]

- [1 HIKVISION DS-D5024F2-AV2 FHD Monitor](#)
- [2 Specifications](#)
- [3 Physical Interface](#)
- [4 Dimension](#)
- [5 Accessory](#)
- [6 FAQs](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



HIKVISION DS-D5024F2-AV2 FHD Monitor



Specifications

Display

Screen Size	23.8 inch
Active Display Area	527.04 (H) mm × 296.46 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.2745 (H) mm × 0.2745 (V) mm
Brightness	250 cd/m ²
Viewing Angle	178° (H)/178° (V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	4000:1
Response Time	7 ms
Refresh Rate	Typ. 60 Hz, Max. 100 Hz
Haze	Haze 25%
Reliability	7 × 16 H
Color Gamut	72% NTSC

Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1
Video & Audio Output	Audio Out × 1

Power

Power Supply	DC 12 V, 2.0 A
--------------	----------------

Standby Consumption	≤ 0.5 W
---------------------	---------

Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	20% RH to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% RH to 90% RH (Non-Condensing)

General	
Casing Material	Plastic
VESA	75 mm × 75 mm (4 – M4 × 6 mm)
Bezel Width	2.0 mm (top/left/right), 23.55 mm (bottom)
Product Dimensions (W × H × D)	With base: 539.7 (W) mm × 427.33 (H) mm × 185.69(D) mm 21.25 (W) inch × 16.82 (H) inch × 7.31 (D) inch Without base: 539.7 (W) mm × 327.33 (H) mm × 43.5 (D) mm 21.25 (W) inch × 12.89 (H) inch × 1.71 (D) inch

Package Dimensions (W × H × D)	652 (W) mm × 445 (H) mm × 116 (D) mm 25.67 (W) inch × 17.52 (H) inch × 4.57 (D) inch
Net Weight	2.85 ± 0.5 kg (6.28 ± 1.10 lb)
Gross Weight	3.85 ± 0.5 kg (8.49 ± 1.10 lb)
Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.

Power

The monitor operates on a DC 12V, 2.0A power supply with a power consumption of 24W. Standby consumption is 0.5W.

Physical Interface


The monitor features the following interfaces:

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
Audio Out	3.5 mm Audio output interface	DC	DC 12 V 2.0 A input interface

Available Model


- DS-D5024F2-AV2

Dimension

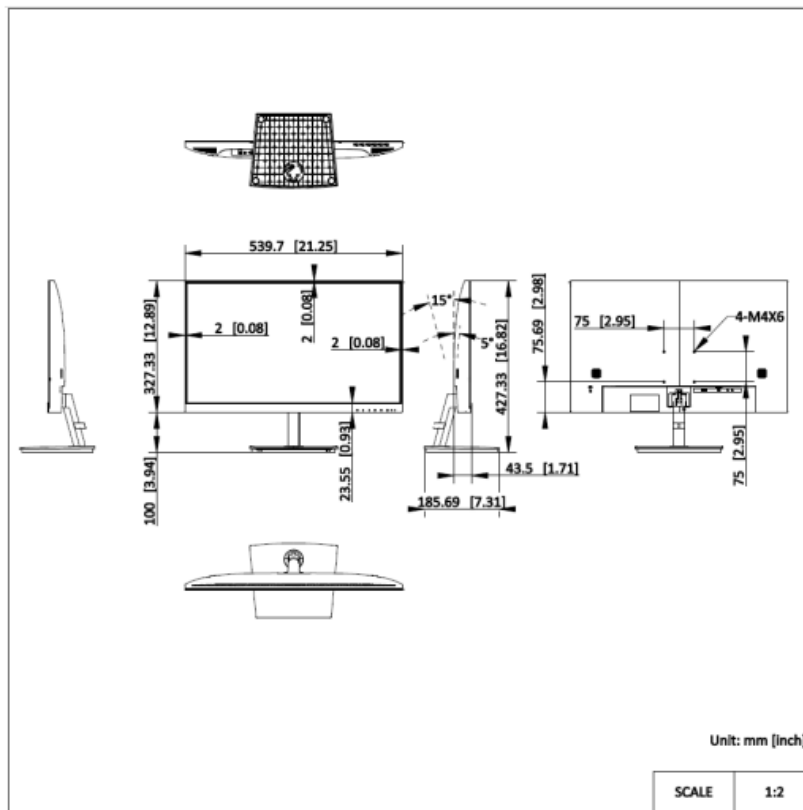

Accessory

Optional



DS-DM1940W Wall-mounted Bracket

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China

T +86-571-8807-5998



www.hikvision.com

FAQs

Q: What is the power supply for the monitor?

A: The monitor operates on a DC 12V, 2.0A power supply.

Q: What is the screen size of the monitor?

A: The screen size is 23.8 inches.

Q: What interfaces are available on the monitor?

A: The monitor features HDMI, Audio Out, and VGA DC interfaces.

Documents / Resources

	HIKVISION DS-D5024F2-AV2 FHD Monitor [pdf] Owner's Manual DS-D5024F2-AV2 FHD Monitor, DS-D5024F2-AV2, FHD Monitor, Monitor
---	---

References

- [User Manual](#)

 DS-D5024F2-AV2, DS-D5024F2-AV2 FHD Monitor, FHD Monitor, Hikvision,
 Hikvision Monitor

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.