

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Riflewell](#) /

› [Riflewell 6-10 Gun Rifle Safe Digital Keypad Instruction Manual T-AKM-132D](#)

## Riflewell T-AKM-132D

# Riflewell 6-10 Gun Rifle Safe Digital Keypad Instruction Manual

Model: T-AKM-132D

<a href="#">Safety Information</a>	<a href="#">Package Contents</a>	<a href="#">Setup &amp; Assembly</a>	<a href="#">Operation</a>	<a href="#">Features</a>	<a href="#">Maintenance</a>
	<a href="#">Troubleshooting</a>	<a href="#">Specifications</a>	<a href="#">Warranty &amp; Support</a>		

## INTRODUCTION

This manual provides detailed instructions for the assembly, operation, and maintenance of your Riflewell 6-10 Gun Rifle Safe with Digital Keypad. Please read this manual thoroughly before installation and use to ensure proper function and security.



Figure 1: Riflewell 6-10 Gun Rifle Safe (Model T-AKM-132D) - Exterior and Interior View.

## SAFETY INFORMATION

---

**WARNING:** Failure to follow these instructions may result in serious injury or property damage.

- Always store firearms unloaded and locked. Ammunition should be stored separately.
- Keep the safe locked and the keys stored in a secure location away from children and unauthorized individuals.
- Do not store the emergency keys inside the safe.
- Ensure the safe is securely mounted to prevent tipping or removal.
- Keep children away from the safe. This safe is designed to prevent unauthorized access, especially by children.



RIFLEWELL

## 6-10 GUN SAFE FOR RIFLE

Better Protect For Your Property Safety



Digital Keypad



Mute Function



Large Size



Smart Alarm



Anti-Smashing



Protective Lining



All Steel Material



LED Light



Figure 2: Emphasizing child safety by keeping firearms and dangerous items secured within the safe.

## PACKAGE CONTENTS

Verify that all components are present before beginning assembly:

- 1 x Riflewell 6-10 Large Unassembled Gun Safe
- 2 x Emergency Keys
- 4 x Expansion Screws
- 1 x Emergency Battery Box
- 1 x Suction Magnetic Light
- 3 x Gun Supports (Adjustable Racks)
- 1 x Instruction Manual
- 1 x USB Type-C Cable (for external power)



# LARGE SIZE GUN CABINET

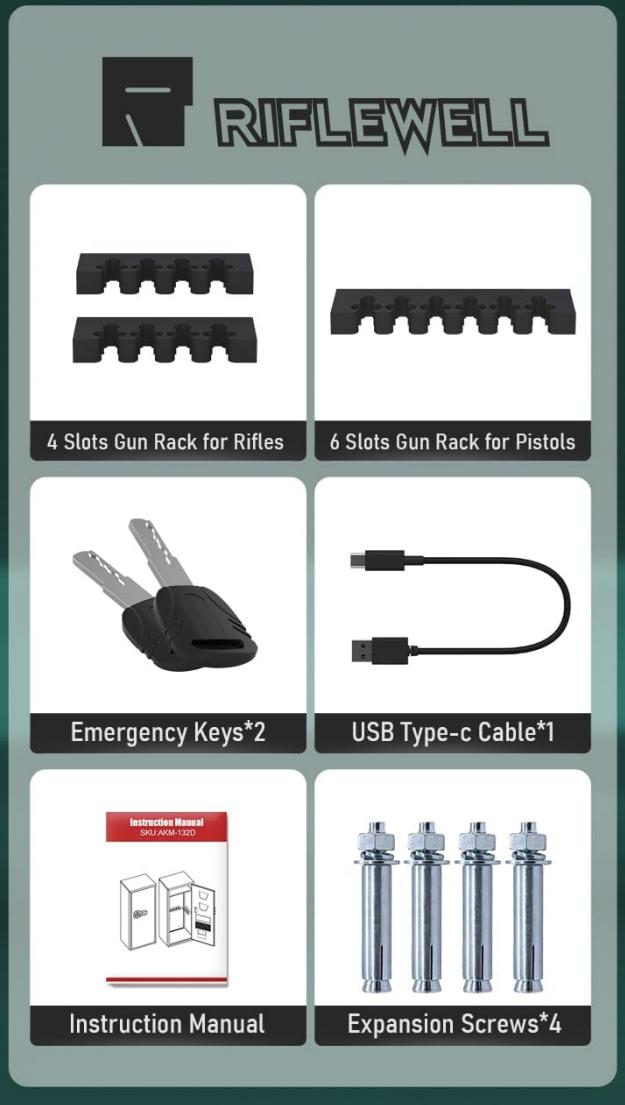
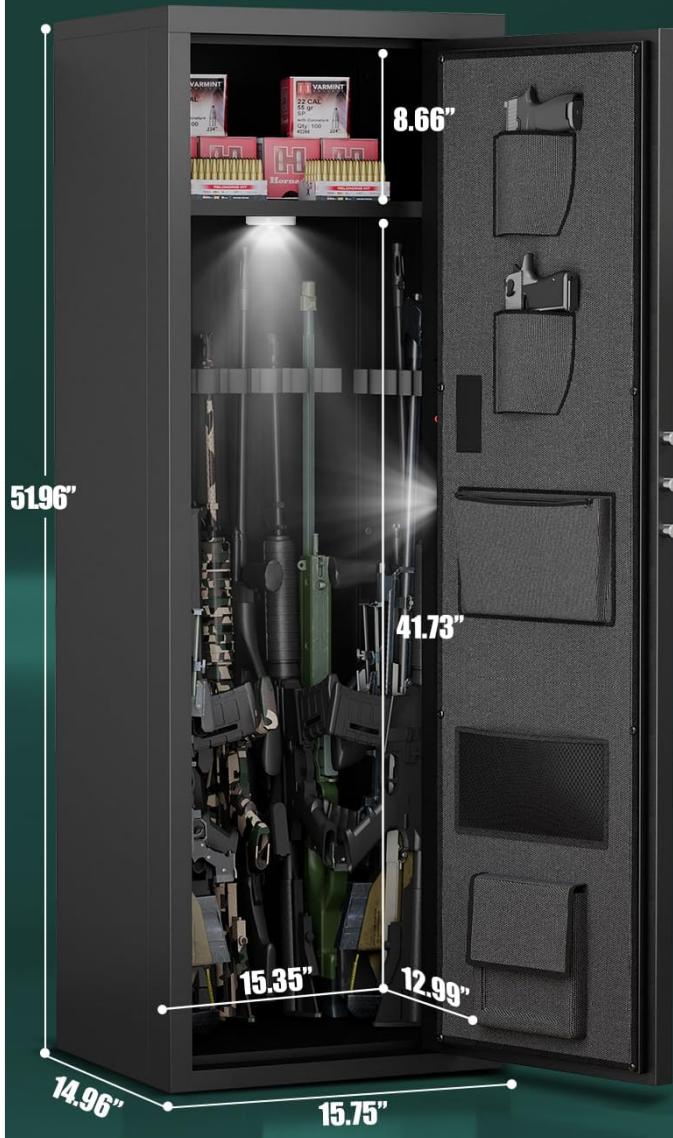


Figure 3: Package contents and key dimensions of the safe.

## SETUP & ASSEMBLY

The Riflewell gun safe is shipped unassembled. Follow these steps for proper assembly and installation.

### 1. Assembly

Detailed assembly instructions are provided in the included instruction manual. All parts are clearly marked. It is recommended to have assistance during assembly due to the size and weight of the components.

### 2. Battery Installation

The digital keypad requires batteries for operation. Locate the battery compartment on the back of the keypad. Insert the required batteries (typically AA, not included) ensuring correct polarity. Close the compartment securely.

### 3. Mounting the Safe

For maximum security, the safe should be securely mounted to a floor or wall. The safe features 4 pre-drilled holes on the back for this purpose. Use the provided expansion screws.

1. Position the safe in the desired location.
2. Mark the drilling points through the pre-drilled holes on the back of the safe onto the wall or floor.
3. Move the safe and drill pilot holes at the marked locations.
4. Reposition the safe and secure it using the expansion screws.

Figure 4: Steps for securely mounting the safe to a wall or floor.

## OPERATION

### 1. Setting Passwords

The safe can store two sets of digital passwords. Refer to the detailed instructions in the included manual for programming your personal codes. The code memory function ensures your code is retained even if power is lost.



Figure 5: Digital keypad with backlit buttons and key features.

## 2. Unlocking Methods

Your Riflewell safe offers multiple ways to access its contents:

- **Digital Keypad:** Enter your programmed password and turn the knob.
- **Emergency Keys:** In case of battery failure or forgotten password, use the emergency key to open the safe. Insert the key into the hidden keyhole, turn, and then turn the knob.
- **External Power + Password:** If batteries are depleted, connect the emergency battery box or a USB Type-C cable to the external power jack, then enter your password and turn the knob.

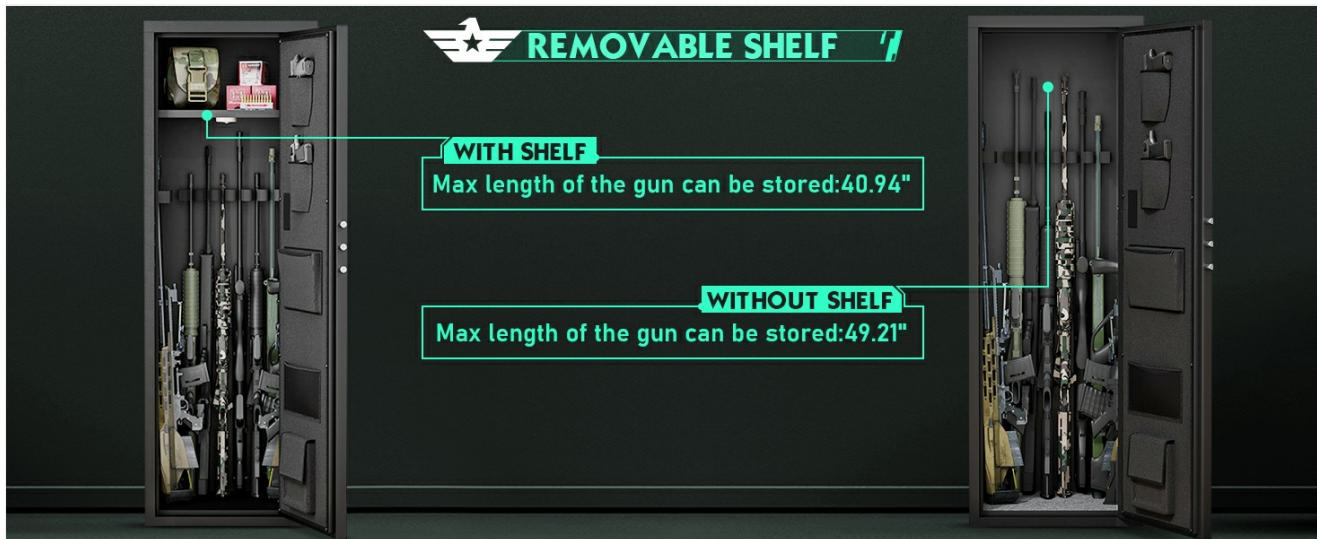


Figure 6: Multiple methods for unlocking the safe.

## 3. Dual Alarm System

The safe is equipped with a dual alarm system for enhanced security:

- **Incorrect Password Alarm:** If an incorrect password is entered 3 consecutive times, an alarm will sound for 60 seconds.
- **Vibration Alarm:** If the safe is shaken or hit violently, the vibration alarm will be triggered immediately.

## 4. Mute Function

To operate the safe silently, activate the mute function. Press the '\*' button twice, then press '#' to toggle the mute function on or off. A prompt sound will confirm the change.

## 5. Low Voltage Warning

When the battery voltage drops below 4.8V, the safe will emit a prompt sound to remind you to replace the batteries.

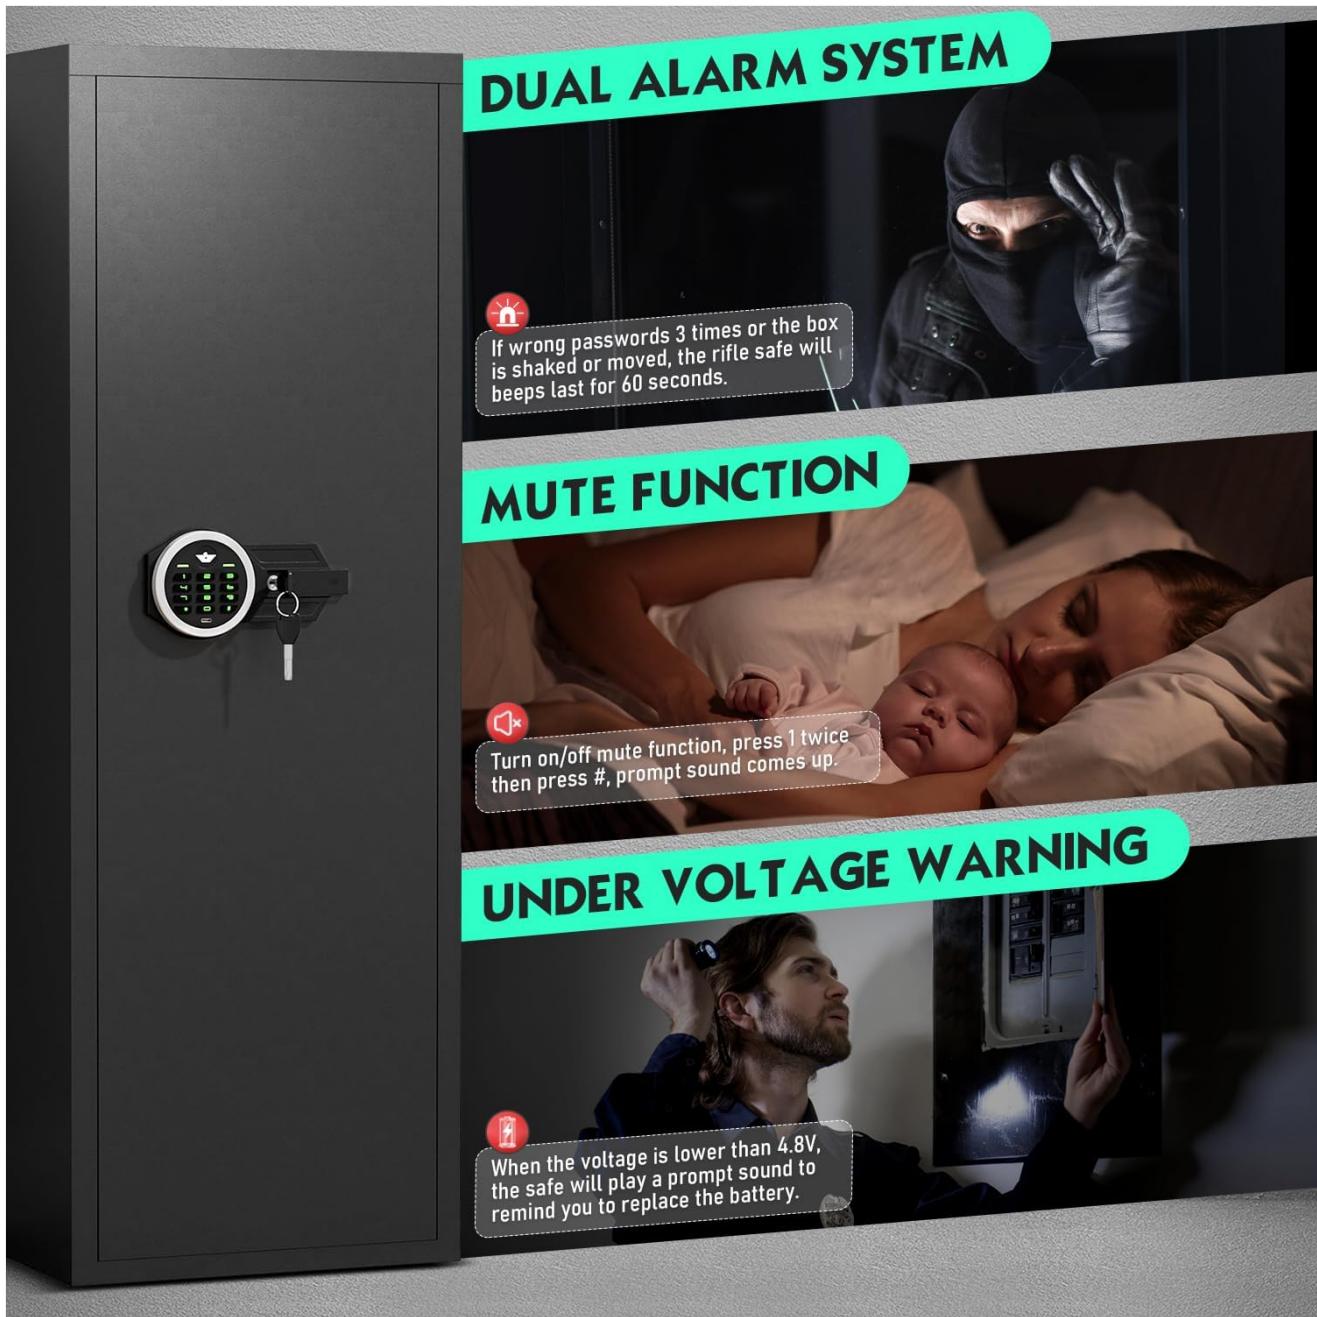


Figure 7: Dual alarm system and mute function operation.

## FEATURES

### 1. Flexible Storage

- **Removable Shelf:** The interior includes a removable steel shelf, allowing for flexible storage configurations. With the shelf, the maximum gun length is approximately 40.94 inches. Without the shelf, it accommodates guns up to 49.21 inches.
- **Adjustable Gun Racks:** Three magnetic adjustable gun racks are provided, allowing you to customize the interior layout for different types of firearms (rifles, shotguns, pistols).
- **Additional Storage:** The safe includes 2 storage bags and a net pocket, along with 2 pistol bags, for organizing ammunition, pistols, or other valuables.

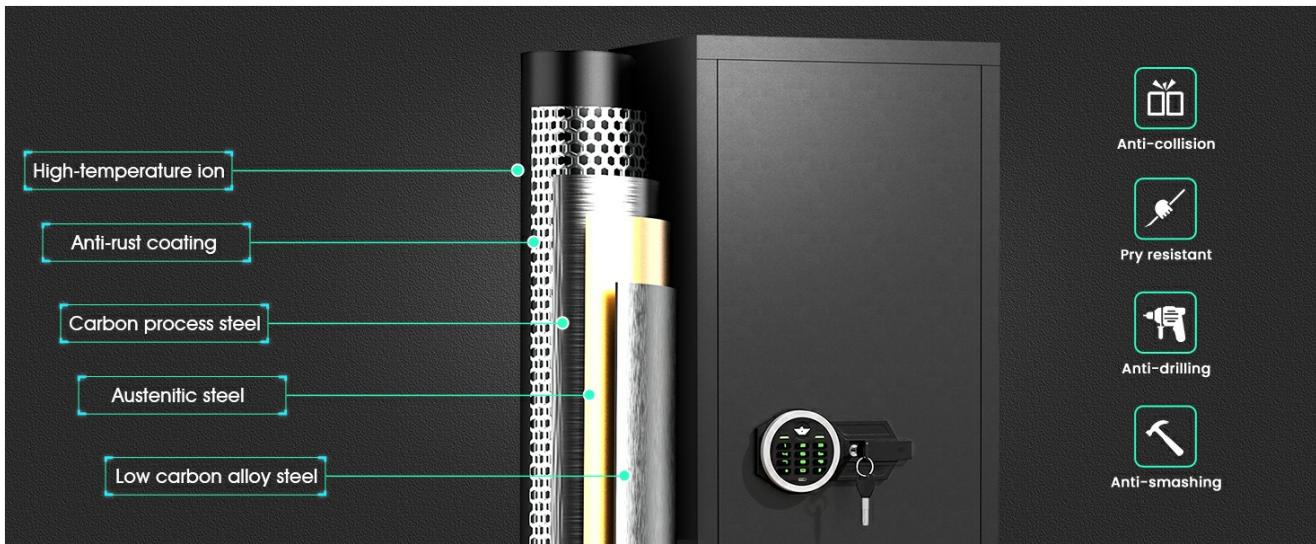


Figure 8: Removable shelf and its impact on internal storage height.

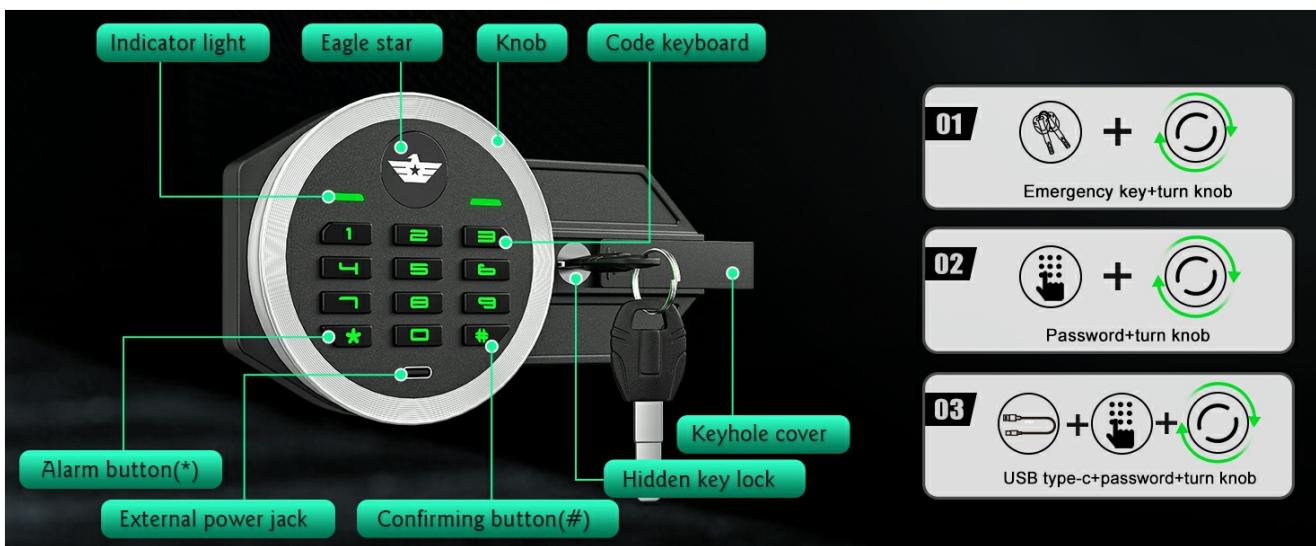


Figure 9: Adjustable gun racks for customized firearm storage.

## 2. Interior LED Light

The safe includes an interior LED light and an additional large magnetic light to illuminate the contents, making access easier in low-light conditions.

## 3. Robust Construction

Constructed from low carbon alloy steel, the safe features 3 solid locking bolts, a high-strength metal lock core, and an anti-corrosion design for enhanced security and durability. It is designed to be tamper-resistant and pry-proof.



Figure 10: Door opening angle and dimensions of the robust locking bolts.

## MAINTENANCE

- Cleaning:** Wipe the exterior of the safe with a soft, damp cloth. Avoid abrasive cleaners.
- Battery Replacement:** Replace the keypad batteries promptly when the low voltage warning sounds to ensure continuous operation. Use high-quality alkaline batteries.
- Key Storage:** Always keep emergency keys in a secure location outside the safe, accessible only to authorized persons.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Keypad not responding	Dead batteries	Replace batteries or use external power supply.

Problem	Possible Cause	Solution
Safe does not open with password	Incorrect password entered; Batteries low/dead	Re-enter correct password carefully. Replace batteries or use external power. Use emergency key if necessary.
Alarm sounds unexpectedly	Incorrect password attempts; Safe vibrated/moved	Ensure correct password entry. Check if the safe was disturbed.
Low voltage warning sound	Batteries are low	Replace all batteries in the keypad.

## SPECIFICATIONS

---

Feature	Detail
Brand	Riflewell
Model Number	T-AKM-132D
Product Dimensions (D x W x H)	14.96"D x 15.75"W x 51.96"H
Lock Type	Electronic Combination Lock
Color	Black
Material	Low Carbon Alloy Steel
Mounting Type	Floor Mount
Capacity	6-10 Rifles/Shotguns (depending on configuration)

## WARRANTY INFORMATION

---

The Riflewell 6-10 Gun Rifle Safe comes with a **1-Year Warranty** from the date of purchase. This warranty covers manufacturing defects and malfunctions under normal use. Please retain your proof of purchase for warranty claims.

## CUSTOMER SUPPORT

---

If you encounter any issues or have questions regarding your Riflewell gun safe, please contact our customer service team. Our experienced support staff is available to assist you within 24 hours.

### How to find the seller on Amazon for support:

1. Log in to your Amazon buyer's account.
2. Navigate to "Your Orders".
3. Find your order for the Riflewell gun safe.
4. Click "Get help" or "Contact Seller" for assistance with this product.

## Protect Your Property Safety

We are committed to continuously pursuing innovation to meet our customers' firearm storage needs with designs that are both user-friendly and efficient.



Digital Keypad



Fingerprint



Keys



Anti-Smashing



Protective Lining



All Steel Material



Smart Alarm



Mute Function



LED Light



Gun Rack



Type-C Cable



Emergency Battery Box

We consistently stand the customer's perspective, meticulously refining every aspect of our design to ensure your complete satisfaction.

Figure 11: Riflewell customer support team ready to assist.

© 2025 Riflewell. All rights reserved.