



HIKVISION DS-KH9510-WTE1 Video Intercom Network Indoor Station Owner's Manual

[Home](#) » [Hikvision](#) » HIKVISION DS-KH9510-WTE1 Video Intercom Network Indoor Station Owner's Manual 

*HIKVISION DS-KH9510-WTE1 Video Intercom Network
Indoor Station Owner's Manual*

DS-KH9510-WTE1(B)
Video Intercom Network Indoor Station

HIKVISION®




Contents

- [1 Key Feature](#)
- [2 Physical Interface](#)
- [3 Specification](#)
- [4 Available Model](#)
- [5 Dimension](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Key Feature

- 10.1-inch colourful touch screen with resolution 1024 × 600
- Supports Android app installation
- Open platform for the third-party software integration
- Video intercom live view on mobile phone all-day
- Built-in Hik-Connect for all-in-one management
- Wireless intrusion panel for on-site management
- Receives 7 seconds of video verification from alarm systems

Physical Interface

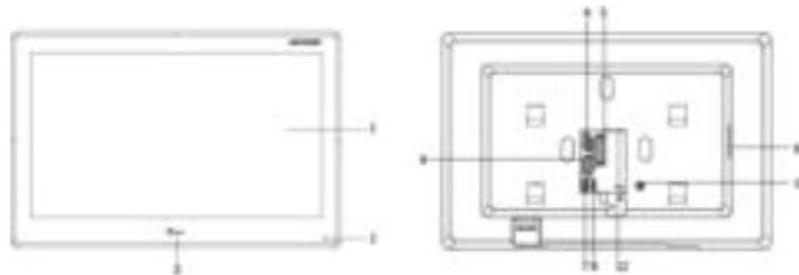

No.	Description	No.	Description
1	Screen	7	Debugging Port
2	Microphone	8	microUSB Interface
3	Unlock Button	9	Loudspeaker
4	Power Supply Interface	10	Reserved
5	Alarm Terminals	11	TAMPER
6	RS-485/Relay Interface	12	Network Interface

Specification

System parameters

Operating system	Embedded Android operation system
ROM	8 GB Emmc
RAM	2 GB
CPU	Embedded processor

Display parameters

Screen size	10.1-inch
Operation method	Capacitive touch screen
Type	Colorful IPS
Resolution	1024 × 600

Video parameters

Lens	/
Resolution	/
FOV	/
WDR	/
Video compression standard	/
Focal length	/

Audio parameters

Audio compression standard	G.711 U, G.711 A
----------------------------	------------------

Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200
Notice capacity	16
Linked indoor extensions capacity	5
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	Support
Wi-Fi standard	Wi-Fi 802.11 b/g/n
Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	

Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	1
TF card	Reserverd
Alarm output	1 relay output, 1 alarm output
Power interface	1
General	
Button	/
Installation	Surface mounting
Indicator	/
Weight	Without package: 875 g With package: 1060 g
Protective level	/
Working temperature	-10 ° C to 50 ° C (14 ° F to 122 ° F)
Working humidity	10% to 90%
Dimensions	254 mm × 166 mm × 26.65 mm (10.0" × 6.54" × 1.05")
Battery	/
Power supply	IEEE802.3af, standard PoE 12 VDC, 1 A
Application environment	Indoor
Power consumption	≤ 8 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Norwegian, Danish

RAM

Available Model

DS-KH9510-WTE1(B)

Dimension



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5988
www.hikvision.com



Follow us on social media to get the latest product and solution information.



HIKVISION



HIKVISIONHQ



HIKVISIONHQ



HIKVISION_Global



HIKVISION Corporate Channel



HIKVISIONHQ

[Linden](#)

[Facebook](#)

[Twitter](#)

[International-chat](#)

[YouTube](#)

[Instagram](#)

Documents / Resources



[HIKVISION DS-KH9510-WTE1 Video Intercom Network Indoor Station](#) [pdf] Owner's Manual

DS-KH9510-WTE1 Video Intercom Network Indoor Station, DS-KH9510-WTE1, Video Intercom Network Indoor Station, Intercom Network Indoor Station, Network Indoor Station, Indoor Station, Station

[Manuals+](#)