



# HIKVISION DS-PM1-O1L-WE Relay Module User Guide

[Home](#) » [Hikvision](#) » HIKVISION DS-PM1-O1L-WE Relay Module User Guide 

## Contents

- [1 HIKVISION DS-PM1-O1L-WE Relay Module](#)
- [2 APPEARANCE](#)
- [3 WIRING](#)
- [4 ENROLLMENT](#)
- [5 INSTALLATION](#)
- [6 FORMATTING](#)
- [7 Specification](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

**HIKVISION®**


**HIKVISION DS-PM1-O1L-WE Relay Module**



## Step: 1

### APPEARANCE


1. Antenna
2. Wiring Terminal
3. Learn Button

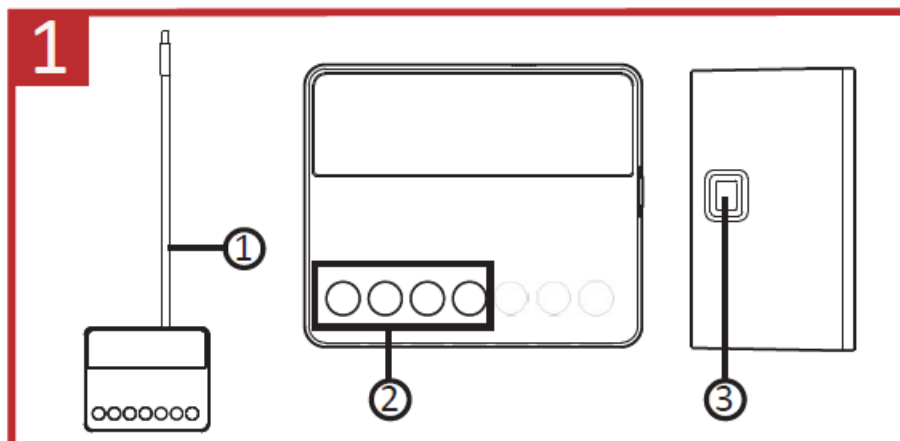

## Step: 2


### WIRING

1. Power Input Wiring
2. Relay Output Wiring
3. Peripheral Tamper-Proof Wiring

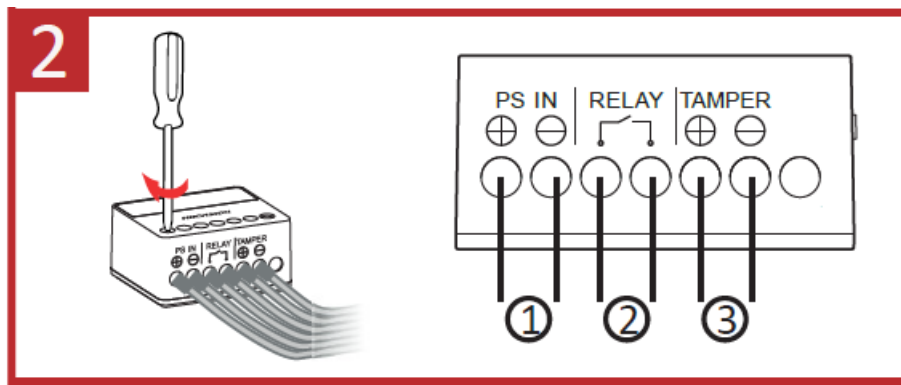

Step: 3

## ENROLLMENT

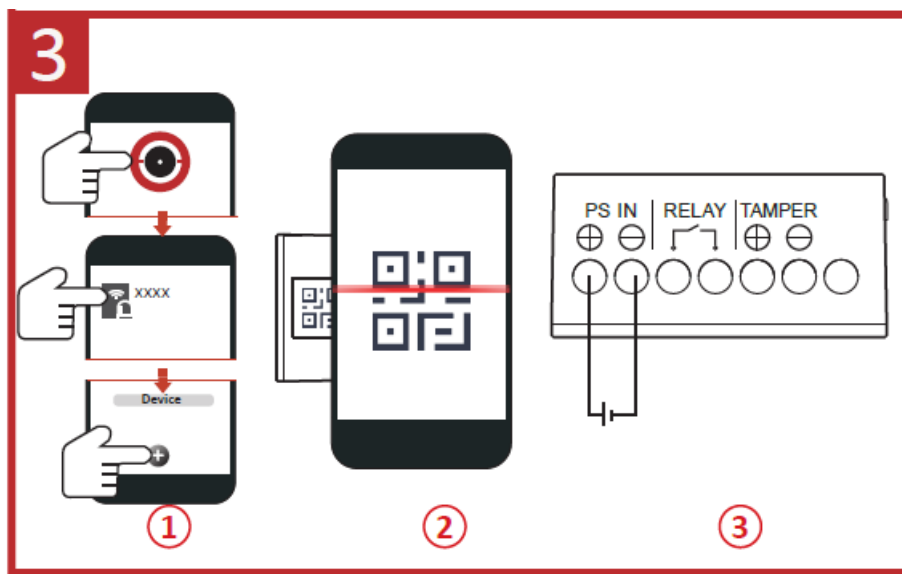

Step: 4


## INSTALLATION

Paste the expander in the required place with sponge tape.

Step: 5

## FORMATTING

Hold the Learn button for 8 s, and meanwhile power the expander on.

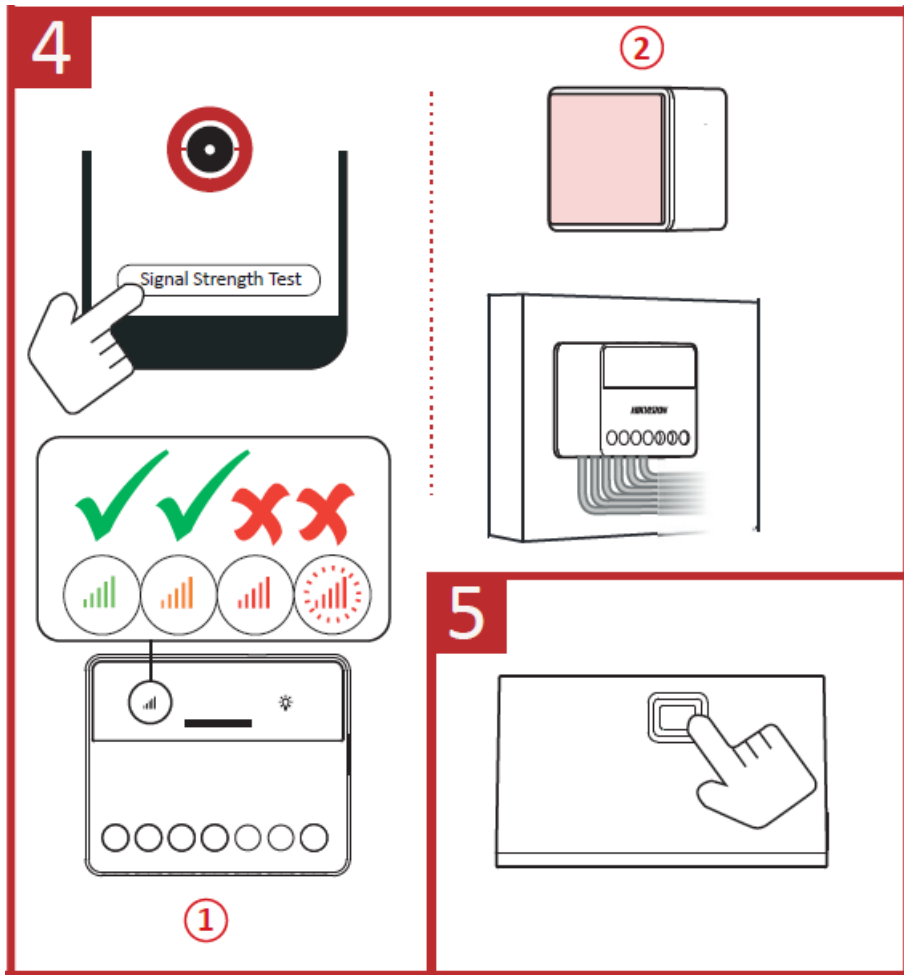


Specification

|                                 |                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------|
| Function button                 | 1, for initialization                                                                 |
| Scenario settings               | By alarm, by operation, by fault,by schedule, by manual                               |
| Alarm input                     | 1, for the tamper, NO/NC                                                              |
| Relay output Voltage protection | 1, NO/NC (Max.5A at 36 VDC )<br>Supported, cut off when $\leq 6.5$ V or $\geq 36.5$ V |
| RF method                       | Two-way communication                                                                 |
| RF frequency                    | 868 MHz                                                                               |
| RF distance                     | 1800 m                                                                                |
| Power supply                    | 7 VDC to 24 VDC                                                                       |
| LEDs status                     | 3, register/signal (green/red), power (green),relay status (blue)                     |
| Operation temperature           | -10°C to +55°C                                                                        |
| Operation humidity              | 10% to 90%                                                                            |
| Shell material                  | Plastic                                                                               |
| Dimension (W x H xD)            | 38 x 25 x 18mm                                                                        |
| Weight                          | 28.5 g                                                                                |
| Installation method             | Wall mounting                                                                         |



More Languages.

## Documents / Resources



**[HIKVISION DS-PM1-O1L-WE Relay Module](#)** [pdf] User Guide  
DS-PM1-O1L-WE Relay Module, DS-PM1-O1L-WE, Relay Module, Module

## References

- [🌐 Hikvision US | The world's largest video surveillance manufacturer |](#)
- [🌐 HOME](#)
- [🌐 Hikvision US | The world's largest video surveillance manufacturer |](#)

Manuals+.