



HIKVISION DS-PS1-I-WE Wireless Internal Sounder User Guide

[Home](#) » [Hikvision](#) » HIKVISION DS-PS1-I-WE Wireless Internal Sounder User Guide 

Contents


- [1 HIKVISION DS-PS1-I-WE Wireless Internal Sounder](#)
- [2 APPEARANCE](#)
- [3 ENROLLMENT INSTALLATION](#)
- [4 Specification](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)



HIKVISION DS-PS1-I-WE Wireless Internal Sounder




APPEARANCE


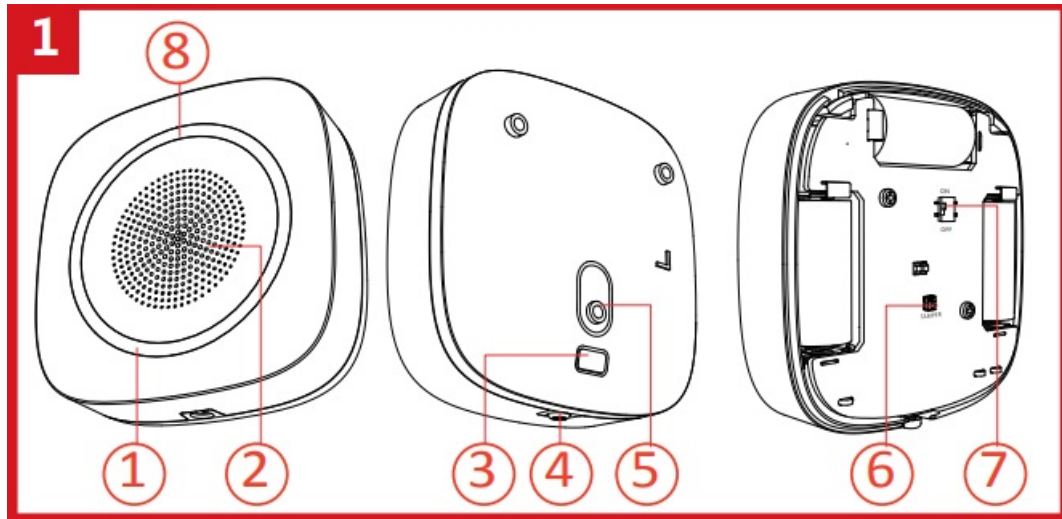


1. Strobe Light
2. Buzzer
3. Cable Hole
4. Set Screw
5. Tamper Screw Hole
6. Tamper Button
7. Power Switch
8. Indicator

ENROLLMENT

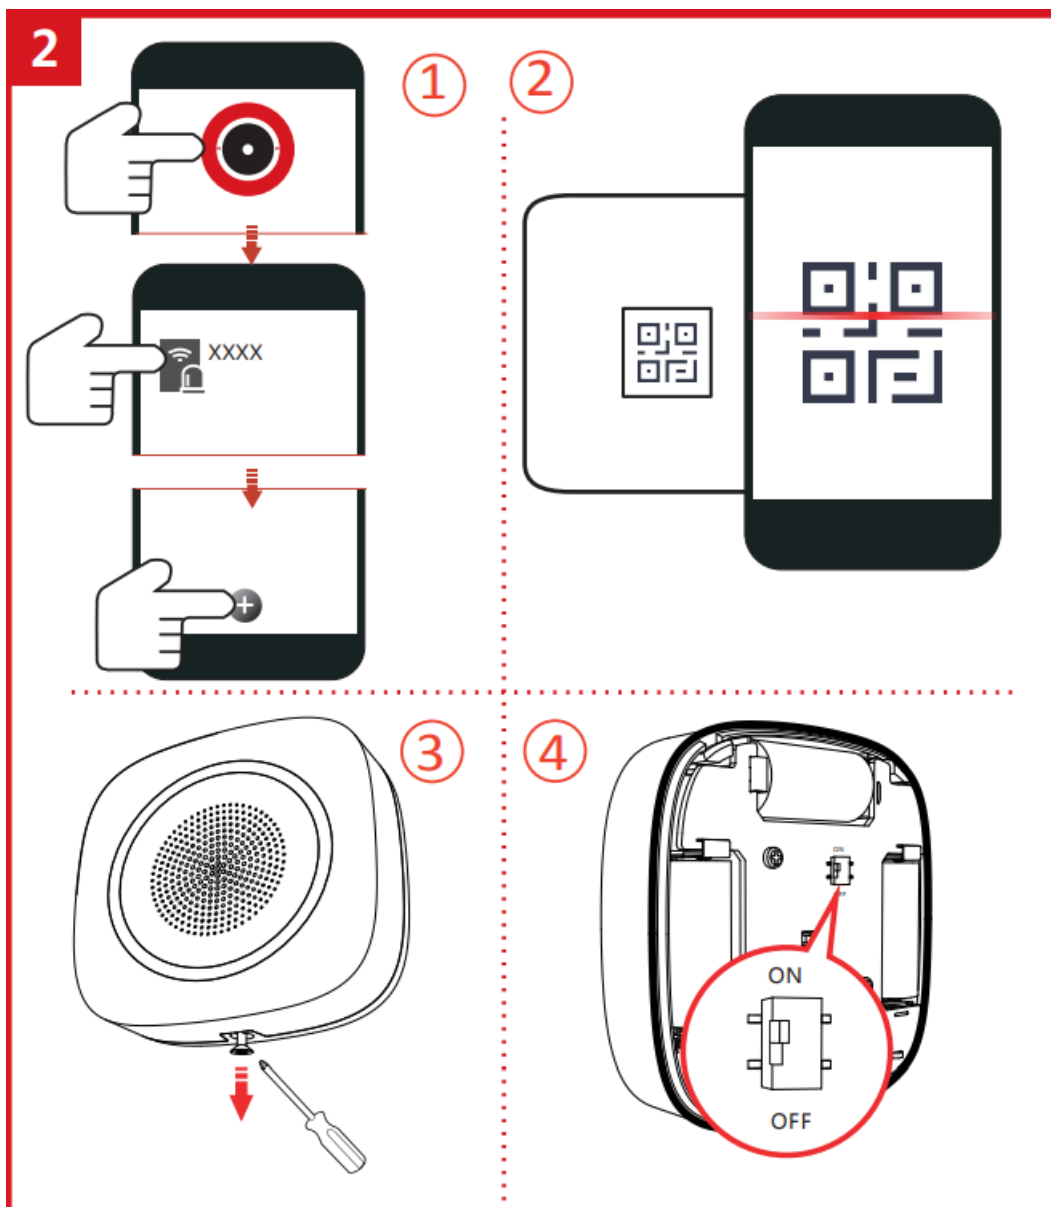

INSTALLATION

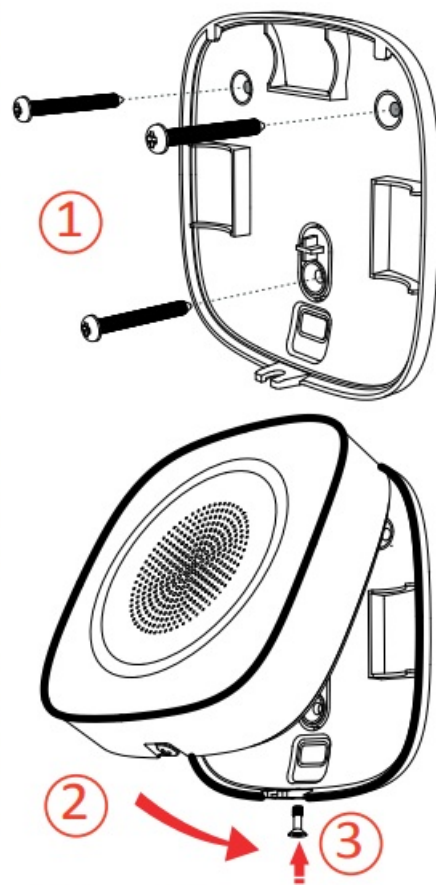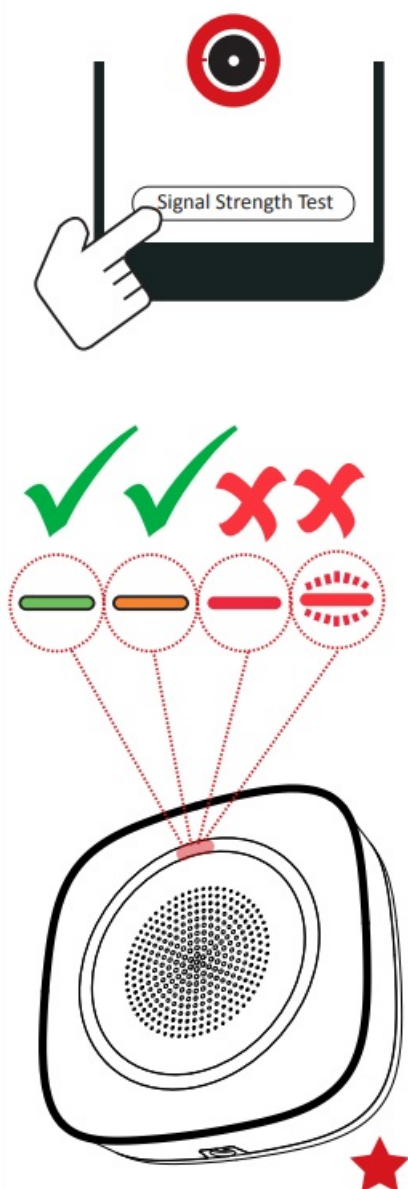

User Manual



User Manual

Scan the QR code for more information and operation help.

Specification

RF	Frequency	868 MHz
	Metod	Two-way communication
	Distance	1.6 KM
Indication	Indicator	Red/Green/Amber
	Strobe light	Red/Blue
Power	Power	Battery (default power supply method)
	Consumption	Quiescent Current: 40uA Max. 3 V/4A (alerts in volume level 3)
	Low Battery Cut Off	2.45 V
	Voltage Range	Fully charged (new) to 2.45V DC (battery)
	Battery life span	3 CR123A, 3 years in work status (triggered every two weeks and alerting 90 s for each triggering)
Interface	Power switch	Power switch
	Tamper switch	Front and rear tamper-proof
Buzzer	Decibel	90 to 110 db
	Max. sound duration	15min 900s
General	Operation Temperature	-10 °C to 40 °C (14 °F to 104 °F)
	Operation Humidity	10% to 90%
	Dimension(W × H × D)	88× 88 × 32 mm (3.46" ×3.46" × 1.26"
	Weight	169.5g
	Installation	Wall mounting

50131-1:2006+A2:2017 EN 50131-4:2019 EN 50131-5-3:2017

Security Grade(SG)2 Environmental Class(EC) II

Signal Strength Test

Certified by Telefication

Documents / Resources



[HIKVISION DS-PS1-I-WE Wireless Internal Sounder](#) [pdf] User Guide

DS-PS1-I-WE, Wireless Internal Sounder, DS-PS1-I-WE Wireless Internal Sounder, Internal So
under, Sounder