

[Home](#) » [Hikvision](#) » **HIKVISION iDS-TCM403-BI-UHK 4 MP High Performance IR ANPR Bullet Camera Installation Guide**

Contents [[hide](#)]

- [1 HIKVISION iDS-TCM403-BI-UHK 4 MP High Performance IR ANPR Bullet Camera](#)
- [2 Specification](#)
- [3 Typical Application](#)
- [4 Dimension](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)



HIKVISION iDS-TCM403-BI-UHK 4 MP High Performance IR ANPR Bullet Camera



Specification

Camera	
Image Sensor	1/1.8" progressive scan CMOS
Max. Resolution	2688 × 1520

Min. Illumination	Color: 0.001 Lux @ (F1.2, AGC ON)
Shutter Time	1/25 s to 1/100,000 s
Day Night	IR cut filter
Lens	
Focal Length FOV	2.8-12mm : Horizontal: 113.5° to 39°, Vertical: 58.4° to 22.7° , Diagonal: 141.3° to 44.3° 8-32mm : Horizontal: 41.9° to 15.1°, Vertical: 22.9° to 8.64°, Diagonal: 48.8° to 17.3° 10-50mm: Horizontal: 32.2° to 7.8°, Vertical: 18.1° to 4.4°, Diagonal: 37.1° to 8.95° 20-50 mm lens or suitable for one camera one lane deployment
Focus	Auto
Iris Type	DC-IRIS
Aperture	2.8-12mm : F1.38 8-32mm : F1.7 10-50mm : F1.7
Illuminator	
Built-in Supplement Light Type	IR light
Built-in Supplement Light Range	Up to 40 m
IR Wavelength	850 nm

Video	
Main Stream	50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 760, 704 × 576, 352 × 288) 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 760, 704 × 576, 352 × 288)
Sub-Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 760, 704 × 576, 352 × 288) 60 Hz: 30 fps (1920 × 1080, 1280 × 760, 704 × 576, 352 × 288)
Third Stream	50 Hz: 25 fps (1280 × 760, 704 × 576, 352 × 288) 60 Hz: 30 fps (1280 × 760, 704 × 576, 352 × 288)
Video Compression	H.264 and H.265 encoding Main stream: H.265/H.264/MJPEG Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline profile/Main profile/High profile
H.265 Type	Main profile
Audio	

Audio Compression	G.711/G.722.1
Audio Bit Rate	8Kbps (G.711) /16Kbps (G.722.1)
Network	
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,SFTP,DHCP,DNS,DDNS,RT P,RTSP,RTCP,NTP,SMTP,SNMP,I GMP,QoS,IPv4/IPv6,UDP,SSL/TLS,ISUP,ARP,802.1X
Simultaneous Live Vie w	Up to 6 channels
API	ONVIF (PROFILE S, PROFILE G, PROFILE T),ISAPI,SDK,IS UP

User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection,Complicated password,HTTPS encrypti on,802.1X authentication (EAP-PEAP, EAP-LEAP, EAP-MD5) ,Watermark,IP address filter,Basic and digest authentication f or HTTP/HTTPS,WSSE and digest authentication for ONVIF, RTP/RTSP over HTTPS,Control timeout settings,Security au dit log,TLS 1.2, 1.3,Host authentication (MAC address)
Network Storage	Micro SD/TF card (512 GB), local storage and CVR, NVR, A NPR
Web Browser	Chrome V61+, IE9 to IE11, Firefox V41+, Edge
Image	

Image Settings	Rotation mode, saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable via client software or web browser.
Day/Night Switch	Auto/Scheduled/Manual
Wide Dynamic Range (WDR)	140 dB
Image Enhancement	BLC, 3D DNR
Interface	
Ethernet Interface	1 RJ45 10M/100M/1000M Ethernet interface
On-Board Storage	Built-in memory card slot, supporting microSD/SDHC/SDXC card, up to 512GB
Audio	Supported
Alarm	1 input interface, 1 output interface, 2 relays
RS-485	1 RS-485 interface
Wiegand	1 Wiegand (CardID 26bit, SHA-1 26bit, Hik 34bit)
Event	
Basic Event	HDD Error, Network Disconnected, IP Address Conflicted, Vehicle Detector Exception, Traffic Light Detector Exception
Road Traffic and Vehicle Detection	
Coverage	Up to 3 lane(s)

Smart Function	Traffic flow detection vehicle type, lane flow, lane speed, space headway, time headway, lane time occupancy rate, lane space occupancy rate, queuing length, and traffic status Incident detection: congestion, stopped vehicle, lane change, wrong-way driving, speeding, low-speed driving
----------------	---

LPR Countries/Regions	Middle East: The United Arab Emirates (Abu Dhabi, Ajman, Dubai, Fujairah, Ras Al Khaimah, Sharjah and Umm Al Quwain), Qatar, Iraq, Egypt, Jordan, Kuwait, Saudi Arabia, Pakistan, Oman, Lebanon, Bahrain, Africa: Nigeria, Kenya, Ivory Coast , South Africa, Tanzania, Mauritius, Morocco, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Senegal, Algeria, Asia-Pacific: Australia, New Zealand, Indonesia, Malaysia, Singapore, South Korea, Thailand, Vietnam, the Philippines, Hong Kong, Macao, Taiwan, Myanmar, India, Mongolia, Cambodia, Laos, Bangladesh, Nepal, Sri Lanka, America: Canada, Argentina, Chile, Paraguay, Uruguay, El Salvador, Bolivia, Colombia, Brazil, Ecuador, Peru, Mexico, Panama, Costa Rica, Trinidad and Tobago, the Dominican Republic, Guatemala, Europe: Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, the Republic of North Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, the UK, Ireland, Germany, Italy, Austria, Israel, Palestinian, Belgium, Luxembourg, Albania, Kosovo, Serbia, Romania, Montenegro, Denmark, Finland, Sweden, Slovenia, Portugal, Malta, Cyprus, Iceland, Liechtenstein, Bosnia and Herzegovina, Russian-Speaking Regions: Azerbaijan, Belarus, Kazakhstan, Lithuania, Georgia, Estonia, Latvia, Russia, Ukraine, Moldova, Uzbekistan, Kyrgyzstan, Armenia, Turkmenistan, Tajikistan
-----------------------	--

Accuracy (Under recommended installation and lighting conditions)	- Minimum capture rate = 97% & 95% for 3 and 4-wheel traffic for day and night respectively. - Minimum capture rate = 85% & 75% for motorcycle for day and night respectively.
No License Plate Detection	Supported
Motorcycle LPR	Supported
ANPR	ANPR camera shall classify the vehicles captured based on color as well as vehicle type (car, motorcycle, rickshaws, vans, buses, trucks etc)
	ANPR camera records shall contain at least the record identifier, interpreted VRM, location, date & time of capture.
	ANPR cameras shall have local storage (SD card or equivalent or better). Upon disconnection of network, all data shall be stored on local storage and after restoration of network, data shall be pushed to main software
Vehicle Color	Red, yellow, green, blue, pink, purple, cyan, brown, white, grey, black Recognizable at daytime only.

Vehicle Manufacturer	84 manufacturers: Hyundai, Toyota, KIA, Honda, Volkswagen, Benz, Nissan, Ford, Isuzu, BMW, Chevrolet, Mitsubishi, Renault, Opel, Suzuki, Skoda, Daewoo, Audi, Mazda, GAC HINO, Peugeot, SsangYong, Citroen, Fiat, Scania, MAN, Volvo, Lexus, Seat, Land Rover, Daihatsu, Dongwo, Subaru, Iveco, MINI, JEEP, Porsche, Chery, Dodge, Chrysler, Acura, Alfa Romeo, Great Wall, Infiniti, Smart, Saic Maxus, JAC, Jaguar, GMC, Lincoln, JMC, SAAB, FAW, Yutong, Guangzhou Yunbao, Joylong, Geely, Cadillac, JBC, An'kai, Haima, Foton, King Long, Dongfeng, Geely-Emgrand, Perodua, UD, BYD, Renault Samsung, Proton, HICOM, Malaysia_Unknown 1, Hyundai-Rohens, SsangYong-Old Version, Equus-Old Version, CNHTC, Rolls-Royce, Beiben Truck, Haval, Hino, Kia-Borrego, Chang'an, Alfa, FORO
Seat Belt Detection	Supported (with flash supplement light)
Mobile Phone Detection	Supported (with flash supplement light)

Without Helmet Detection	Supported
Wrong Way Detection	Supported
Capture Speed Range	5 to 120 km/h
General	
Operating System	Linux

Power	DC 12 V to 24 V, 1.25 A, max. 15 W, two-core terminal block , PoE: 802.3at, Type 2, Class 4, max. 15 W
Material	Aluminum alloy
Dimension	428.5 mm × 120 mm × 132.8 mm (16.9" × 4.72" × 5.2") (L × W × H)
Package Dimension	452 mm × 398 mm × 198 mm (17.8" × 15.67" × 7.8") (L × W × H)
Weight	Approx. 3 kg (6.61 lb.)
With Package Weight	Approx. 5.19 kg (11.44 lb.)
Operating Condition	-30 °C to 70 °C (-22 °F to 158 °F). Humidity 95% or less (no n-condensing)
General Function	One-key reset, three streams, heartbeat, password protection, watermark
Language	8 languages: English, Russian, Croatian, Korean, Russian, Traditional Chinese, Ukrainian, Spanish
Storage Condition	-30 °C to +60 °C (-22 °F to +140 °F). Humidity 95% or less (Non-condensing)
Approval	

EMC	CE-EMC: EN 55032: 2015/A11:2020+A1:2020, EN IEC61000-3-2: 2019/A1:2021, EN 61000-3-3: 2013+A1:2019/A2:2021, EN 50130-4: 2011 +A1: 2014
Safety	CB: IEC 62368-1: 2014+A11,CB: IEC 62368-1: 2018+A11,C E-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU,WEEE: 2012/19/EU,Reach: Regulation (EC) No 1907/2006
Protection	IK10: IEC 62262:2002,IP67: IEC 60529-2013
Anti-Corrosion Protection	-Y: NEMA 4X (NEMA 250-2018)

Typical Application


Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.

Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.




- High quality imaging with 4 MP resolution(1/1.8" CMOS)
- Clear imaging against strong back light due to 140 dB WDR technology
- Built-in ANPR engine, equipped with AI algorithm
- Efficient H.265+ compression technology to save bandwidth and storage
- Water and dust resistant (IP67) and vandal proof (IK10)
- Camera shall connect with external light, radar etc

Dimension

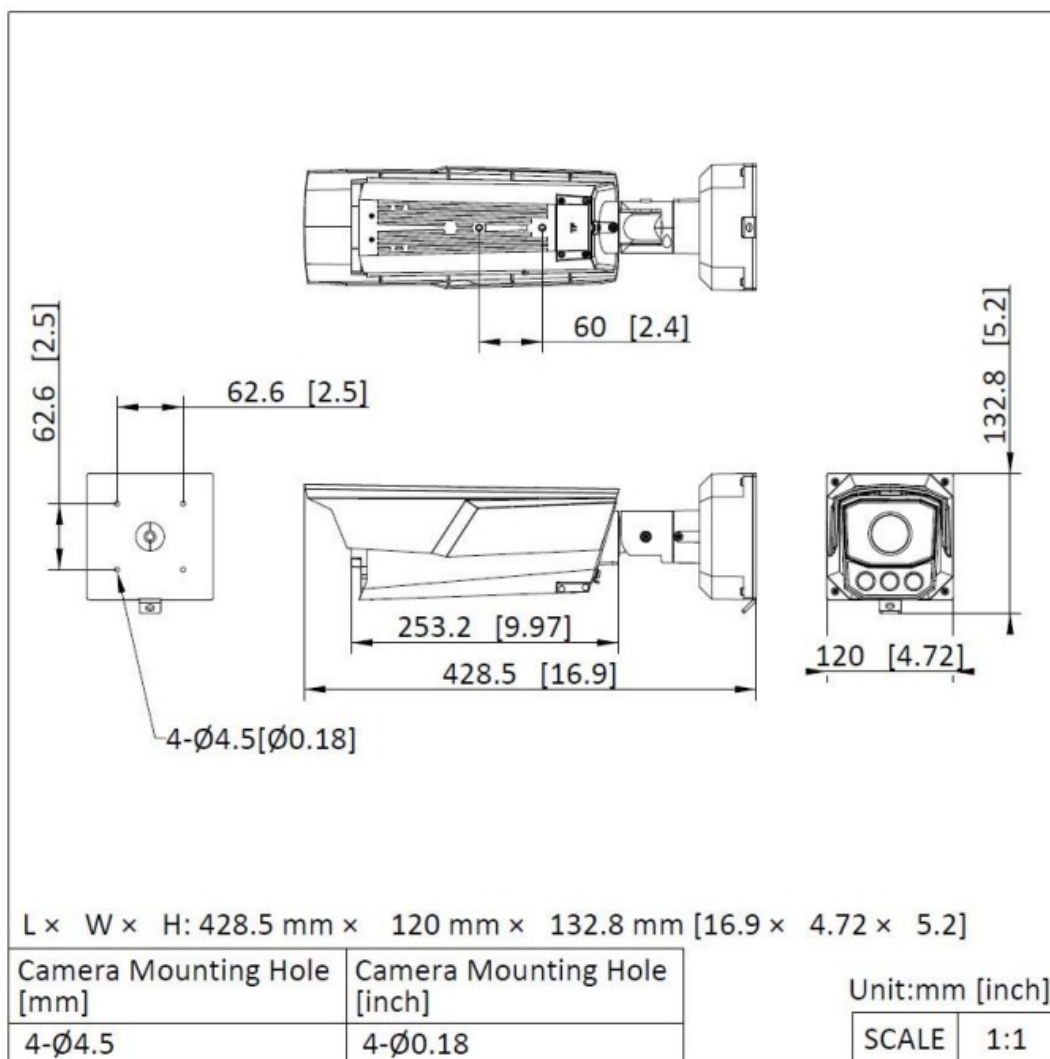

iDS-TCM403-BI-UHK

4 MP High Performance IR ANPR Bullet Camera

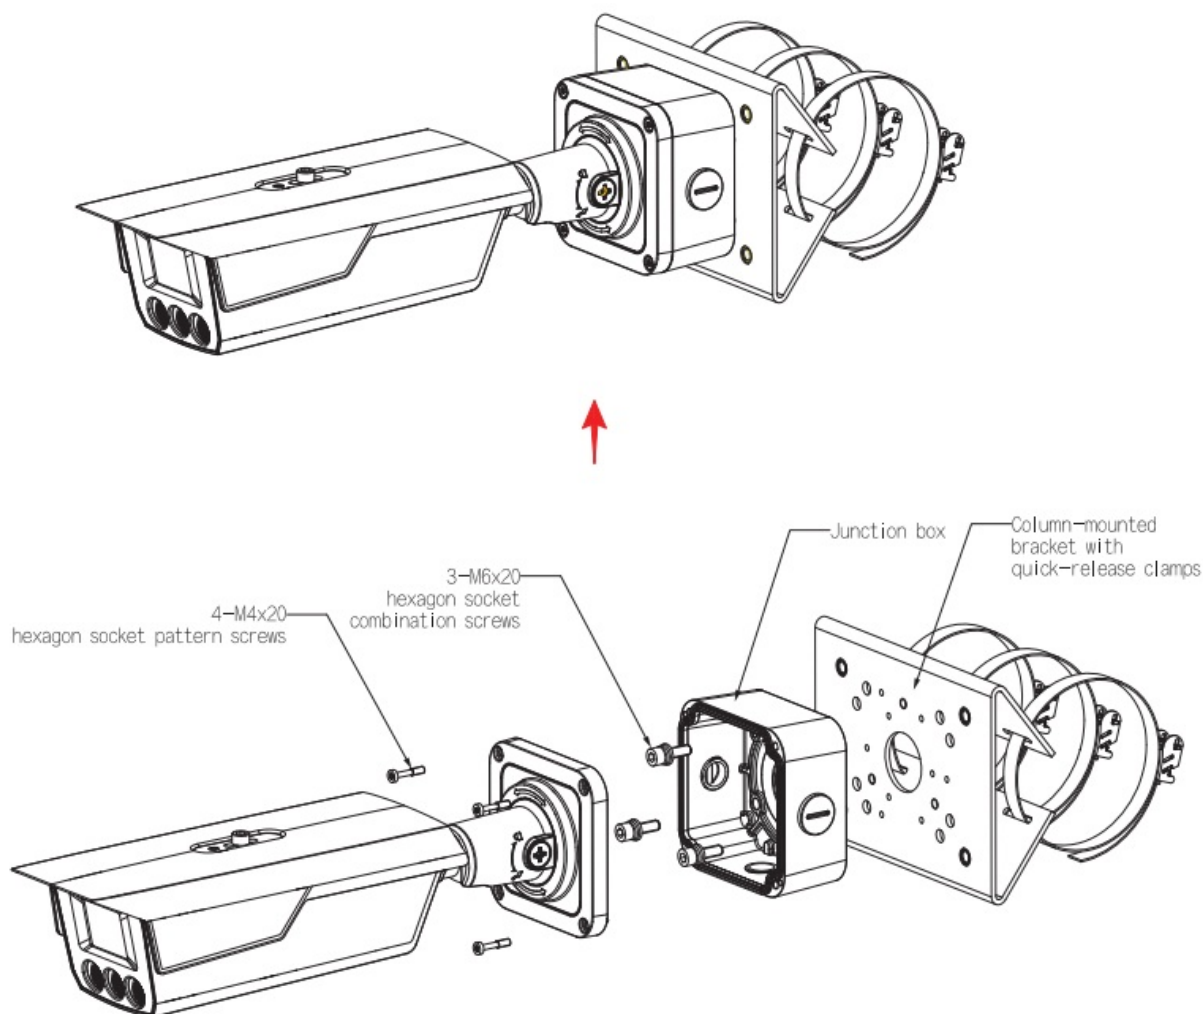

Accessory Optional

- DS-1275ZJ-BJH/60, 0mm Hoop & Bracket
- DS-1275ZJ-BJH/12 7mm Hoop & Bracket
- DS-1278ZJ-HWB Hoop & Bracket
- DS-1701ZJ/BJH Hoop & Bracket
- DS-1232ZJ-T/BJH Cardan Joint

DS-1275ZJ-BJH/60 0mm Hoop & Bracket	DS-1275ZJ-BJH/12 7mm Hoop & Bracket	DS-1278ZJ-HWB Hoop & Bracket	DS-1701ZJ/BJH Hoop & Bracket	DS-1232ZJ-T/BJH Cardan Joint
				



Headquarters No.555 Oianmo Road, Binjiang District, Hangzhou
310051, China

T +86-571-8807-5998

www.hikvision.com

Follow us on social media to get the latest product and solution information.

Documents / Resources

	HIKVISION iDS-TCM403-BI-UHK 4 MP High Performance IR ANPR Bullet Camera [pdf] Installation Guide iDS-TCM403-BI-UHK 4 MP High Performance IR ANPR Bullet Camera, iDS-TCM403-BI-UHK, 4 MP High Performance IR ANPR Bullet Camera, High Performance IR ANPR Bullet Camera, Performance IR ANPR Bullet Camera, IR ANPR Bullet Camera, ANPR Bullet Camera, Bullet Camera
---	---

References

- [User Manual](#)

Hikvision
4 MP High Performance IR ANPR Bullet Camera, ANPR Bullet Camera, Bullet Camera, High Performance IR ANPR Bullet Camera, Hikvision, iDS-TCM403-BI-UHK, iDS-TCM403-BI-UHK 4 MP High Performance IR ANPR Bullet Camera, IR ANPR Bullet Camera, Performance IR ANPR Bullet Camera

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.