

**HIKVISION**  
**IPC-D140HA-D WW 4**  
**MP EXIR Fixed Dome**  
**Network Camera**



## HIKVISION IPC-D140HA-D WW 4 MP EXIR Fixed Dome Network Camera Owner's Manual

[Home](#) » [Hikvision](#) » HIKVISION IPC-D140HA-D WW 4 MP EXIR Fixed Dome Network Camera Owner's Manual 

### Contents

- [1 HIKVISION IPC-D140HA-D WW 4 MP EXIR Fixed Dome Network Camera](#)
- [2 Product Usage Instructions](#)
- [3 FAQ](#)
- [4 Features](#)
- [5 Specification](#)
- [6 Typical Application](#)
- [7 Dimension](#)
- [8 Accessory](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)

**HIKVISION®**

**HIKVISION IPC-D140HA-D WW 4 MP EXIR Fixed Dome Network Camera**



## Specifications

- **Resolution:** 4 MP
- **Wi-Fi Connection:** Yes
- **Audio:** Two-way audio
- **Compression Technology:** H.265
- **Infrared Technology:** EXIR 2.0
- **Weather Resistance:** IP66
- **Memory Card Slot:** Supports microSD/microSDHC/microSDXC card up to 512 GB

## Product Usage Instructions

### Installation

1. Mount the camera in the desired location.
2. Ensure the camera is connected to a power source.
3. If using Wi-Fi, follow the instructions to connect the camera to your network.

### Camera Settings

- Adjust image settings such as saturation, brightness, contrast, and sharpness using client software.
- Configure day/night switch settings for optimal performance.
- Set up privacy masks if needed.

### Audio Features

- Utilize the built-in microphone and speaker for two-way audio communication.
- Adjust audio settings such as compression and sampling rate as needed.

## Storage and Connectivity

- Insert a compatible memory card into the built-in memory card slot for local storage.
- Connect the camera to your network using the Ethernet port for remote access.

## FAQ

### Q: Can this camera be used outdoors?

**A:** Yes, the camera is water and dust-resistant with an IP66 rating, making it suitable for outdoor use.

### Q: What is the maximum storage capacity supported by this camera?

**A:** The camera supports microSD/microSDHC/microSDXC cards up to 512 GB for storage.

### Q: How can I access live views remotely?

**A:** You can use the Hik-Connect cloud service and app for remote management and live views of the camera.

## Features



- High-quality imaging with 4 MP resolution
- Realizing Wi-Fi connection and easy installation
- Provides real-time security via built-in two-way audio
- Efficient H.265 compression technology
- EXIR 2.0, advanced infrared technology with long IR distance
- Water and dust resistant (IP66)
- Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
- Hik-Connect cloud service and app for remote management and views of devices

## Specification

Camera	
Image Sensor	1/2.9" Progressive Scan CMOS
Max. Resolution	2560 × 1440
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s

Day & Night	IR cut filter
<b>Lens</b>	
Lens Type	Fixed focal lens, 2.8 and 4 mm optional
Focal Length & FOV	2.8 mm, horizontal FOV 91°, vertical FOV 49°, diagonal FOV 108° 4 mm, horizontal FOV 74°, vertical FOV 40°, diagonal FOV 87°
Aperture	F1.6
Iris Type	Fixed
Lens Mount	M12
Depth of Field	2.8 mm: 1.5 m to ∞ 4 mm: 2 m to ∞
<b>DORI</b>	
DORI	2.8 mm, D: 63 m, O: 25 m, R: 12 m, I: 6 m 4 mm, D: 78 m, O: 31 m, R: 15 m, I: 7 m
<b>Illuminator</b>	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
<b>Video</b>	
Main Stream	50 Hz: 20 fps (2560 × 1440), 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 20 fps (2560 × 1440), 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (1280 × 720, 768 × 432, 512 × 288) 60 Hz: 30 fps (1280 × 720, 768 × 432, 512 × 288)
Video Compression	Main stream: H.265/H.264 Sub-stream: H.265/H.264
Video Bit Rate	Up to 2 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile

Bit Rate Control	CBR, VBR
<b>Audio</b>	
Audio Compression	G.711ulaw/G.711alaw/AAC-LC
Audio Bit Rate	64 Kbps (G.711)/16 to 64 Kbps (AAC-LC)
Audio Sampling Rate	8 kHz/16 kHz
Environment Noise Filtering	Yes
<b>Network</b>	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP, RTSP, RTCP, NTP, UPnP, IGMP, QoS, IPv4, UDP, Bonjour, SSL/TLS
Simultaneous Live View	Up to 4 channels
API	ONVIF, SDK

User/Host	administrator
Security	Password protection, HTTPS encryption, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE for Open Network Video Interface
Client	iVMS-4200, HiLookVision, Hik-Partner-Pro
<b>Wi-Fi</b>	
Frequency Range	2.412 GHz to 2.472 GHz
Channel Bandwidth	20 MHz
Modulation	802.11b: CCK, QPSK, BPSK, 802.11g: OFDM, 802.11n: OFDM
Wi-Fi Protocol	IEEE802.11b, IEEE802.11g, IEEE802.11n
Transfer Rate	11b: up to 54 Mbps, 11g: up to 54 Mbps, 11n: up to 150 Mbps
Wireless Range	Up to 120 m (The performance varies based on the actual environment)
Antenna	2 Antennas

<b>Image</b>	
Image Settings	Saturation, brightness, contrast, sharpness, adjustable by client software
Day/Night Switch	Auto, Schedule, Day, Night
Wide Dynamic Range (WDR)	Digital WDR
SNR	≥ 52 dB
Privacy Mask	4 programmable polygon privacy masks
<b>Interface</b>	
Built-in Microphone	Yes, 1 built-in microphone
Built-in Speaker	Yes, 1 built-in speaker
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Reset Key	Yes
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
<b>Event</b>	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)), exception
Linkage	Upload to memory card, notify surveillance center, trigger capture, audible warning, auto-tracking lite
<b>Deep Learning Function</b>	

Perimeter Protection	Line crossing, intrusion, region entrance, region exiting Support alarm triggered by specified target types (human and vehicle)
<b>General</b>	
Power	12 VDC $\pm$ 10%, 1 A, max. 10 W, Ø2 mm coaxial power plug, reverse polarity protection
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
General Function	Heartbeat, mirror
Material	Base: metal, front cover: polycarbonate, back cover: polycarbonate
Dimension	120 mm × 120 mm × 95 mm (4.7" × 4.7" × 3.7")
Package Dimension	170 mm × 170 mm × 150 mm (6.7" × 6.7" × 5.9")
Weight	Approx. 593 g (1.3 lb.)
With Package Weight	Approx. 886 g (1.95 lb.)

<b>Approval</b>	
EMC	CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014
RF	CE-RED (EN 301489-1 V2.1.1(BT or 2.4G); EN 301489-17 V3.1.1(BT or 2.4G) ; EN 300328 V2.1.1(BT or 2.4G); EN 62311:2008(BT or 2.4G));
Safety	CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU
Protection	IP66: IEC 60529-2013

## Typical Application

- Hikvision products are classified into three levels according to their anti-corrosion performance.
- Refer to the following description to choose for your using environment.
- This model has NO SPECIFIC PROTECTION.


Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

## Available Model

- IPC-D140HA-D/W(2.8mm)(W)
- IPC-D140HA-D/W(4mm)(W)

## Dimension



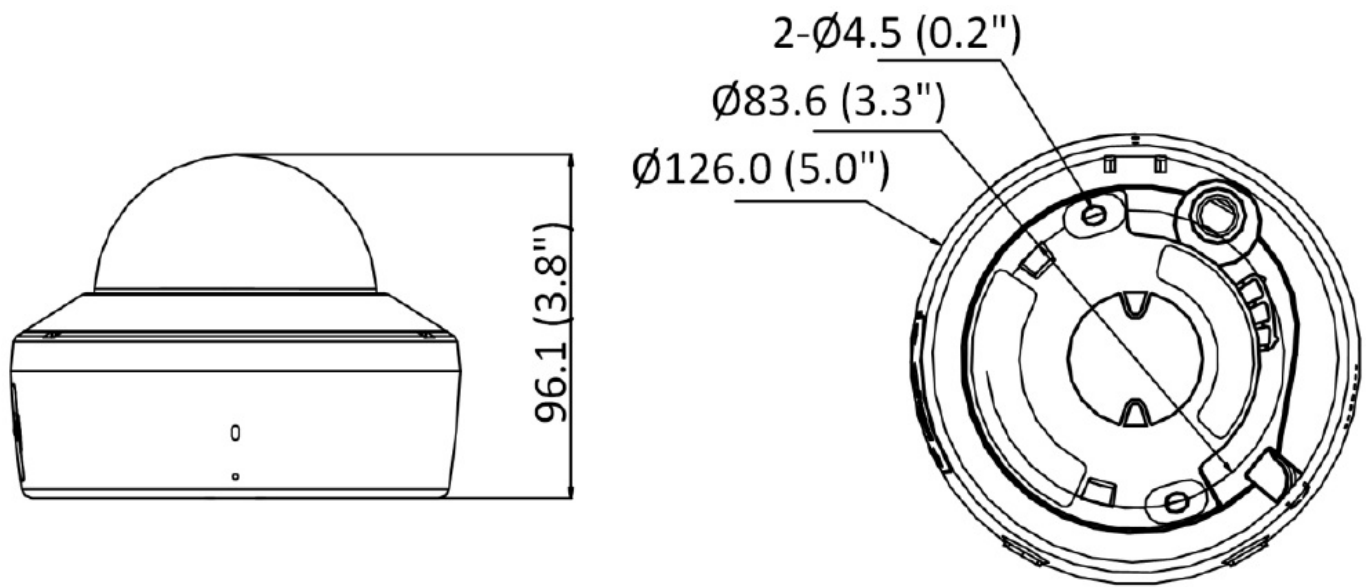

Unit: mm (inch)

## Accessory


### Optional

DS-1272ZJ-120 Wall mount	DS-1272ZJ-120B Wall mount	DS-1271ZJ-120 Pendant Mount

- Headquarters
- No.555 Qianmo Road, Binjiang District,
- Hangzhou 310051, China
- T +86-571-8807-5998
- Technical Support: [support@hikvision.com](mailto:support@hikvision.com)

- Follow us on social media to get the latest product and solution information.
- Hikvision
- HikvisionHQ
- HikvisionHQ
- Hikvision\_Global
- YouTube
- Hikvision Corporate Channel
- hikvisionhq
- © Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied.
- We reserve the right to introduce modifications without notice.

## Documents / Resources

	<p><a href="#">HIKVISION IPC-D140HA-D WW 4 MP EXIR Fixed Dome Network Camera</a> [pdf] Owner's Manual</p> <p>IPC-D140HA-D, IPC-D140HA-D-W, IPC-D140HA-D-W W, IPC-D140HA-D WW 4 MP EXIR Fixed Dome Network Camera, IPC-D140HA-D, WW 4 MP EXIR Fixed Dome Network Camera, EXIR Fixed Dome Network Camera, Fixed Dome Network Camera, Dome Network Camera, Network Camera, Camera</p>
---	--

## References

- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.