



# HIKVISION Network Video Recorder User Manual

[Home](#) » [Hikvision](#) » HIKVISION Network Video Recorder User Manual 

## HIKVISION Network Video Recorder



Firmware Basic Information	Firmware Version:	V4.50.000 build210125
	SDK Version:	V6.1.6.5_build20201028
	Play Library:	V6.0.0.5
	Web component:	V4.0.1.1build201209
	Open SDK Version:	V2.1.4

### Reason of Upgrade

Add new features and optimize product performance.

## Contents


- 1 New features
- 2 Modified functions
- 3 Documents / Resources
- 4 Related Posts

## New features

### 1. Local GUI menu operation optimization



1. Local Live View supports shortcut operation of right-click menu. The specific menu options are: Single-screen selection; Multi-screen selection; Previous screen; Next screen; Start/stop Auto-switch; Add IP channel; Playback; PTZ control; Full screen/Main menu


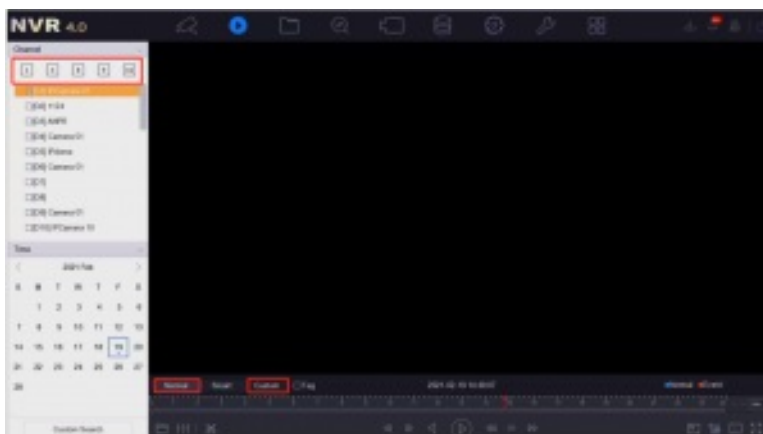


2. Local normal playback and custom playback support channel group selection function.




3. The progress bar supports mouse wheel control when playing back video, and the left mouse button is used for positioning
4. Remove the double progress bar, the progress bar only displays the video distribution of the currently selected channel.

## 2. N+M function

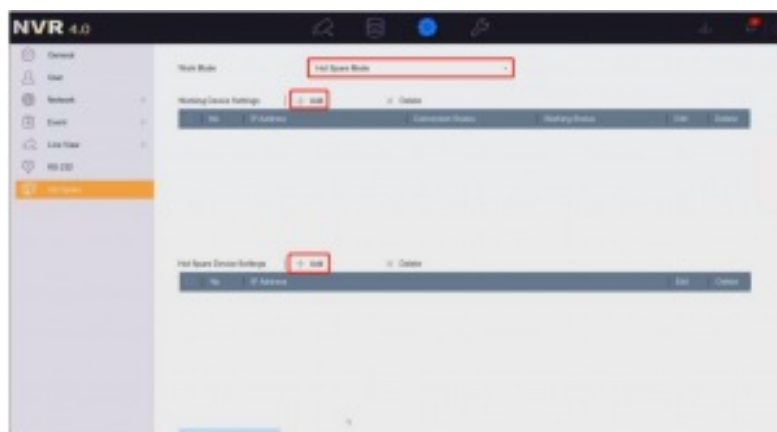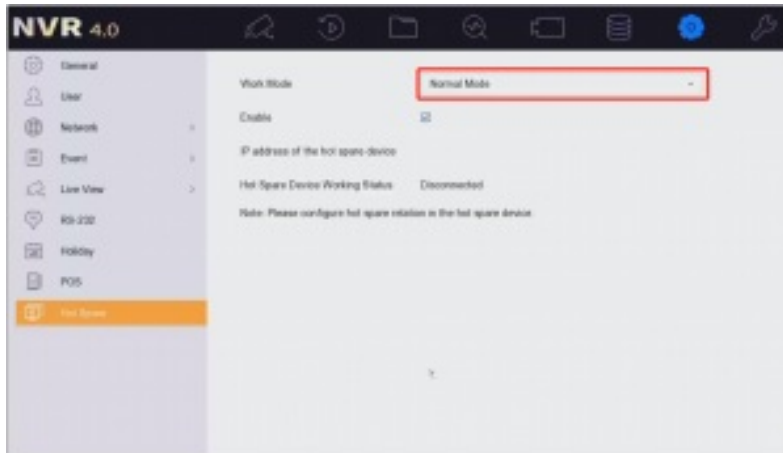

- 1) N+M system hot backup is to solve the scenario where multiple working machines fail at the same time, it supports adding up to 32 working machines and 32 hot backup machines.
- 2) The hot standby NVR can automatically take over the offline working machine, and return the video after the working machine is restored.

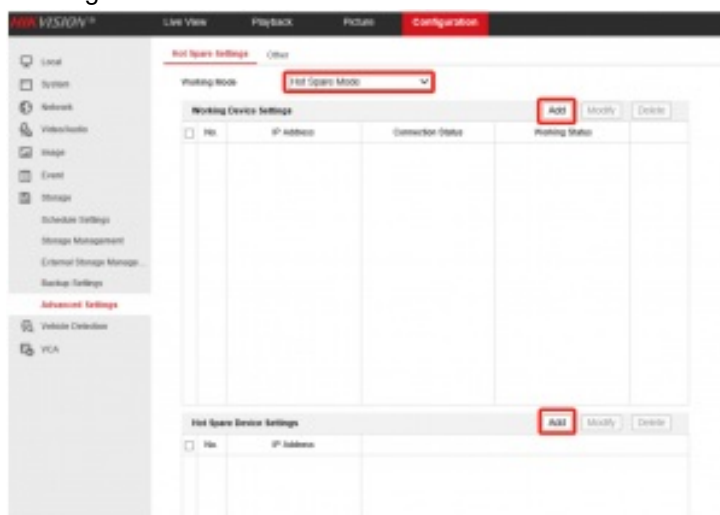


- 3) Compatible with the original N+1 function, the original local N+1 configuration menu is modified to the N+M configuration menu, the N+M menu is added on the WEB, and only the N+1 configuration menu is retained on the

4200.

4) On the basis of the existing N+1 environment, other hot standby machines can be added to the hot standby machine to form an N+M system.

### 3. Local GUI multi-channel alarm linkage association

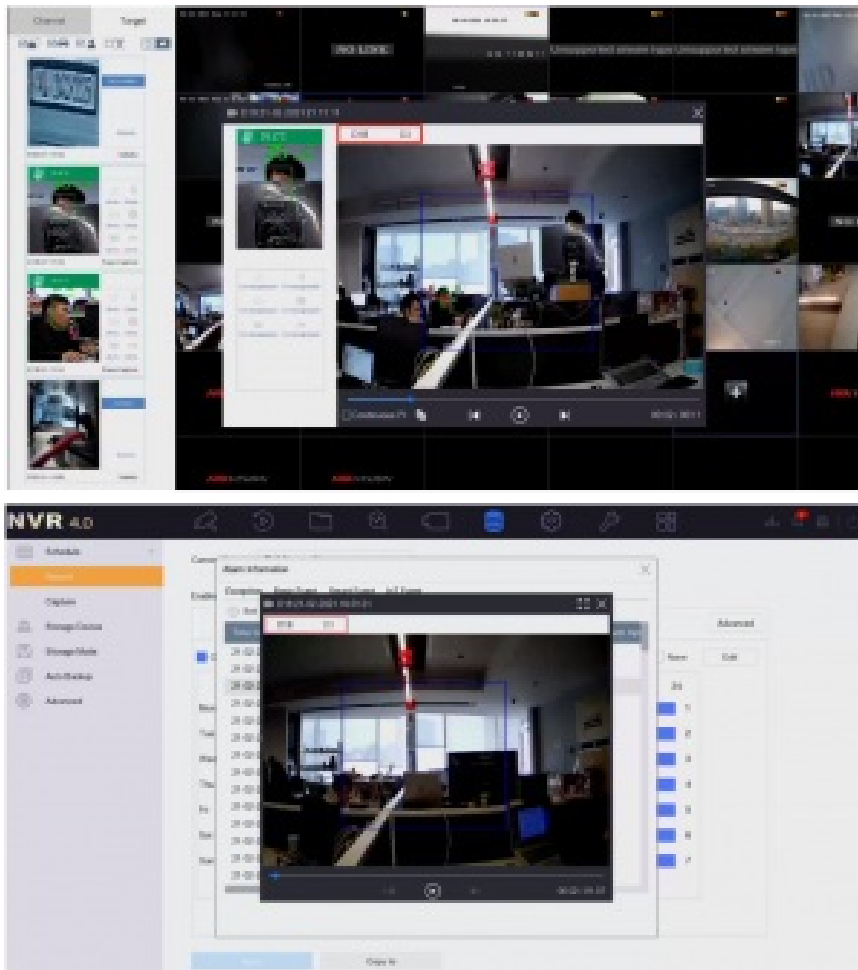

1. Target detection on the preview interface, showing pictures and videos of the associated channel.
2. The bell interface can play channel recordings associated with multi-channel camera event alarms.

### 4. ISUP protocol supports stream encryption function

In order to improve the security of data information, ISUP protocol supports TCP, smooth streaming stream encryption transmission and voice intercom data encryption.

**Note:** The platform software has not yet released this feature version.


### 5. ISUP protocol supports Smooth Streaming mode low bandwidth transmission

After the platform software uses the ISUP protocol to add the NVR, you can select the smooth streaming mode for preview and playback when the network is not good.


**Note:** The platform software has not yet released this feature version.

### 6. Add the hardware version number on the local GUI

The local GUI adds the hardware version number to distinguish the devices of the same model with different motherboards.

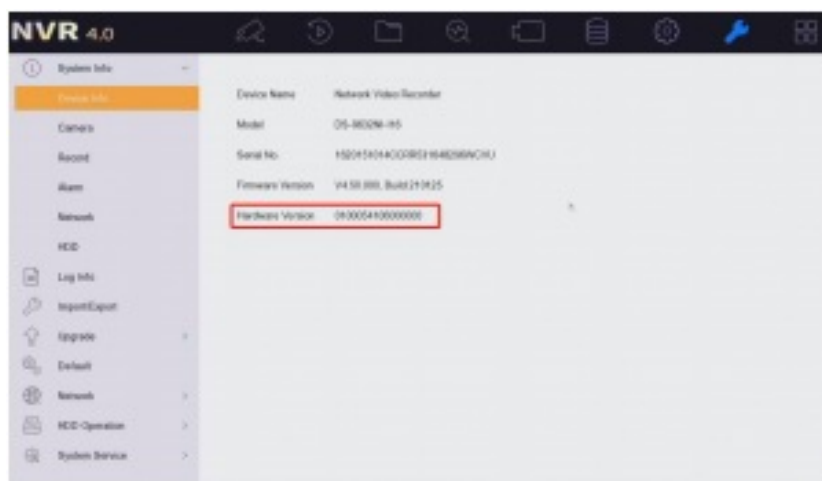

## 7. Local voice broadcast control

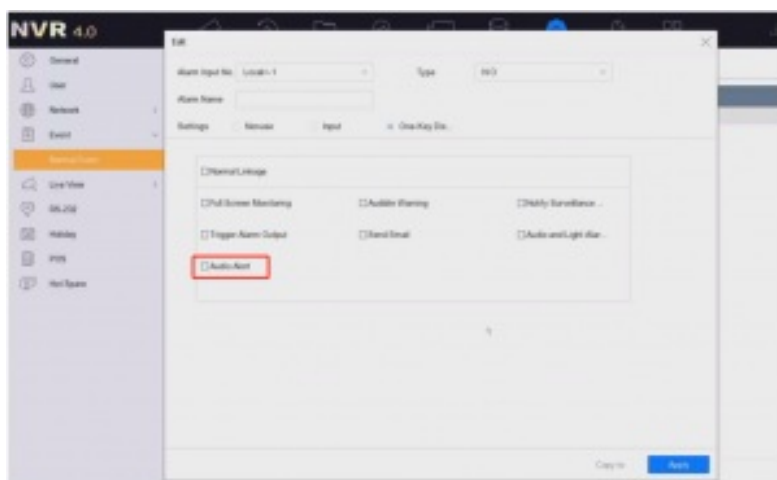

Local one-key disarming can control local voice broadcast.

## Modified functions


### 1. Multi-track stream ultra HD resolution camera access optimization

1. Maximum support for multi-track streaming and ultra HD resolution cameras to connect to any 4 channels of NVR.
2. The maximum resolution of high-resolution cameras that support single track streaming is 4096\*4096

### 2. "Black and white" sensitive character optimization

The local GUI multi-language interface, WEB multi-language interface (including help documents), 4200 multi-language interface, product configuration multi language manual, serial port printing "black and white" related characters are modified.

### 3. IP camera intelligent analysis data storage optimization

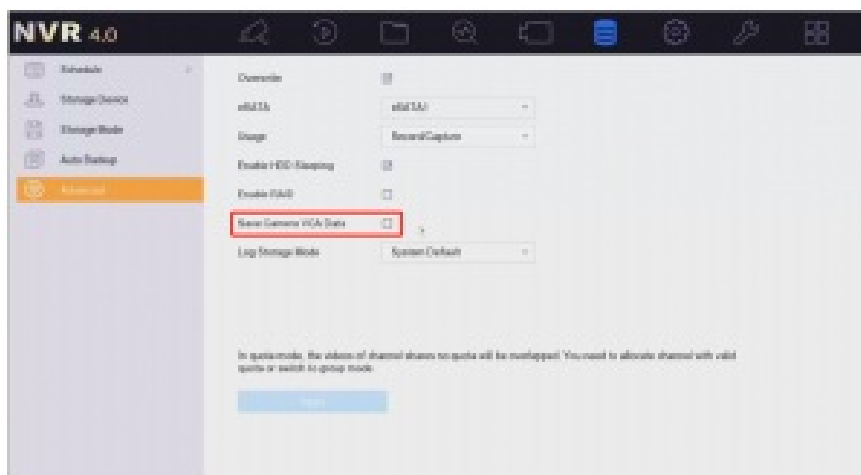

In order to improve the read and write capacity of the HDD, NVR does not store the VCA data of the camera by default. If the user needs to use the VCA data for retrieval and playback, both the IPC's Dual-VCA function and the NVR's Save Camera VCA Data function must be activated.

#### 4. WEB experience optimization

Optimized WEB, it is more smooth to use.

#### 5. Fisheye expansion effect optimization

Improved the smoothness of the fisheye expansion during playback.

#### Related product list:

I series NVR	DS-9600NI-I16, DS-9600NI-I8 DS-8600NI-I8, DS-7900NI-I4(/P) DS-7700NI-I4(B)(/P),DS-7600NI-I2(/P)
--------------	---

#### Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action

#### **Note:**

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.

#### **Documents / Resources**

HIKVISION

Network Video Recorder  
Version: V4.50.000 build210125  
Release Note

Product Name	Network Video Recorder
Model	V4.50.000 build210125
File Name	RM-001
Release Date	2021-01-25

Release Note

For more information, please refer to the release note.

## [HIKVISION Network Video Recorder](#) [pdf] User Manual

### Network Video Recorder, V4.50.000 build210125