



## HiLook IPC-B140HA-D-W 4 MP EXIR Fixed Bullet Wi-Fi Network Camera Owner's Manual

[Home](#) » [HiLOOK](#) » HiLook IPC-B140HA-D-W 4 MP EXIR Fixed Bullet Wi-Fi Network Camera Owner's Manual 

# HiLook



**IPC-B140HA-D/W(W)**  
**4 MP EXIR Fixed Bullet Wi-Fi Network Camera**



## Contents

[1 IPC-B140HA-D-W 4 MP EXIR Fixed Bullet Wi-Fi Network Camera](#)

[2 Specification](#)

[3 Typical Application](#)

[4 Dimension](#)

[5 Accessory](#)

[6 Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998](#)

[Technical Support: support@hikvision.com Follow us on social media to get the latest product and solution information. Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.](#)

[7 Documents / Resources](#)

[7.1 References](#)

[8 Related Posts](#)

## IPC-B140HA-D-W 4 MP EXIR Fixed Bullet Wi-Fi Network Camera

- High quality imaging with 4 MP resolution
- Realizing Wi-Fi connection and easy installation
- Provides real-time security via built-in two-way audio
- EXIR 2.0, advanced infrared technology with long IR distance
- Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP66)
- Hik-Connect cloud service and app for remote management and views of devices

## Specification

Camera	
Image Sensor	1/2.9" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F1.6, AGC ON), B/W: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Max. Resolution	2560 × 1440
Shutter Time	1/25 s to 1/10000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Lens	
Lens Type	Fixed focal lens, 2.8 and 4 mm optional

Focal Length & FOV	2.8 mm, horizontal FOV 91°, vertical FOV 49°, diagonal FOV 108° 4 mm, horizontal FOV 74°, vertical FOV 40°, diagonal FOV 87°
Aperture	F1.6
Lens Mount	M12
Iris Type	Fixed
Depth of Field	2.8 mm: 1 m to $\infty$ 4 mm: 1.5 m to $\infty$
<b>DORI</b>	
DORI	2.8 mm, D: 63 m, O: 25 m, R: 12 m, I: 6 m 4 mm, D: 78 m, O: 31 m, R: 15 m, I: 7 m
<b>Illuminator</b>	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
IR Wavelength	850 nm
Smart Supplement Light	Yes
<b>Video</b>	
Main Stream	50 Hz: 20 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60 Hz: 20 fps (2560 × 1440, 1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (1280 × 720, 768 × 432, 512 × 288) 60 Hz: 30 fps (1280 × 720, 768 × 432, 512 × 288)
Video Compression	Main stream: H.265/H.264, Sub-stream: H.265/H.264
Video Bit Rate	256 Kbps to 2 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR, VBR

<b>Audio</b>	
Audio Compression	G.711, AAC-LC
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw), 16 to 64 Kbps (AAC-LC)
Audio Sampling Rate	8 kHz, 16 kHz
Environment Noise Filtering	Yes
<b>Network</b>	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP, RTSP, RTCP, NTP, UPnP, IGMP, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS

Simultaneous Live View	Up to 4 channels
API	ONVIF, SDK
Security	Password protection, HTTPS encryption, security audit log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE for Open Network Video Interface
User/Host	Only one user: administrator
Client	iVMS-4200, HiLookVision, Hik-Partner-Pro
<b>Wi-Fi</b>	
Transfer Rate	11b: up to 54 Mbps, 11g: up to 54 Mbps, 11n: up to 150 Mbps
Wi-Fi Protocol	802.11n: OFDM, 802.11b: DSSS, 802.11g: OFDM
Frequency Range	2.412 GHz to 2.472 GHz
Channel Bandwidth	20 MHz
Modulation	802.11b: CCK, QPSK, BPSK, , 802.11g: OFDM, , 802.11n: OFDM
Wireless Range	Up to 120 m (The performance varies based on actual environment)

Encryption Mode	WPA-PSK/WPA2-PSK
Antenna	2 Antennas
<b>Image</b>	
Image Settings	Saturation, brightness, contrast, and sharpness adjustable by client software
Day/Night Switch	Auto, Schedule, Day, Night
Wide Dynamic Range (WDR)	Digital WDR
Privacy Mask	4 programmable polygon privacy masks
<b>Interface</b>	
Built-in Microphone	Yes
Built-in Speaker	Yes
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Reset Key	Yes
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
<b>Event</b>	
Basic Event	Motion detection (support alarm triggering by specified target type (human and vehicle)), exception
Linkage	Upload to memory card, notify surveillance center, trigger capture, audible warning, auto-tracking lite
<b>General</b>	
Power	12 VDC $\pm$ 25%, 0.58 A, max. 7 W, Ø5.5 mm coaxial power plug, reverse polarity protection, A switching adapter is included in the package.
Language	English

Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
General Function	heartbeat, mirror
Material	Front cover: metal, back cover: plastic
Dimension	175.6 mm × 73 mm × 89.1 mm (6.9" × 2.9" × 3.5")
Package Dimension	260 mm × 125 mm × 125 mm (10.2" × 4.9" × 4.9")
Weight	Approx. 345 g (0.8 lb.)
With Package Weight	Approx. 635 g (1.4 lb.)

## Approval

EMC	CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014
RF	CE-RED (EN 301489-1 V2.1.1(BT or 2.4G))
Safety	CE-LVD: EN 62368-1: 2014/A11: 2017, CB: IEC 62368-1: 2014+A11
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU
Protection	IP66: IEC 60529-2013

## Typical Application


Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

**Available Model**  
IPC-B140HA-D/W(2.8mm)(W) IPC-B140HA-D/W(4mm)(W)

**Dimension**

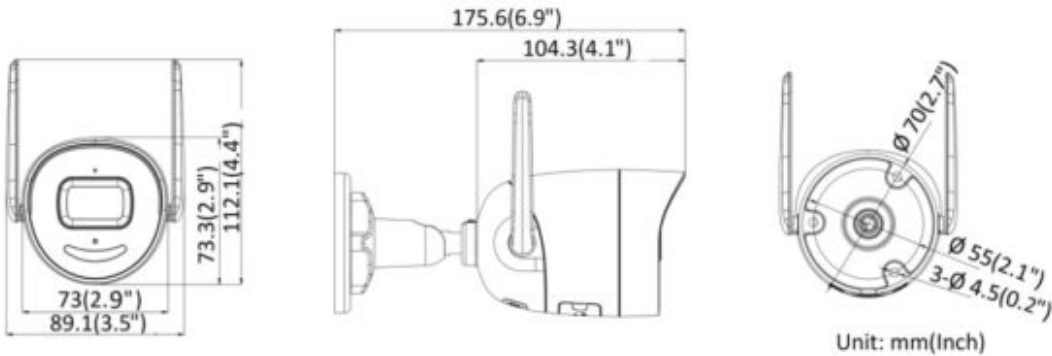

**Accessory**

**Optional**

DS-1280ZJ-XS Junction box	
------------------------------	--------------------------------------------------------------------------------------



Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China

T +86-571-8807-5998

Technical Support: [support@hikvision.com](mailto:support@hikvision.com)

Follow us on social media to get the latest product and solution information.




Hangzhou Hikvision Digital Technology Co., Ltd.

Unless otherwise agreed, Hikvision makes no warranties, express or implied.

We reserve the right to introduce modifications without notice.

## Documents / Resources

	<p><a href="#">HiLook IPC-B140HA-D-W 4 MP EXIR Fixed Bullet Wi-Fi Network Camera</a> [pdf] Owner's Manual</p> <p>IPC-B140HA-D-W, IPC-B140HA-D-W 4 MP EXIR Fixed Bullet Wi-Fi Network Camera, 4 MP EXIR Fixed Bullet Wi-Fi Network Camera, Fixed Bullet Wi-Fi Network Camera, Bullet Wi-Fi Network Camera, Wi-Fi Network Camera, Network Camera, Camera</p>
------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.