



Contents [[hide](#)]

- [1 HILTI MT-FPS Series Fixpoint Connector](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Dimensions](#)
- [5 Usage Instructions](#)
- [6 Precautions](#)
- [7 FAQ](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



HILTI MT-FPS Series Fixpoint Connector



Specifications

- **Product Name:** MT-FPS SF OC Set
- **Model Number:** 2334620-02.2025
- **Width:** MT-FPS-SF
- **Compatible with:** MT-FPS-GF *without 1-1
- **Dimensions:** 10mm, 50mm, 100mm, 150mm
- **Compatible Models:** MT-70 / MT-80 S, MT-80 / MT-90 / MT-90H / MT-100, MT-100, MT-U-GL1
- **Recommended Torque:** 20 Nm (14.75 ft-lb)

Product Usage Instructions

Installation


1. Identify the appropriate size for your application (10mm, 50mm, 100mm, or 150mm).
2. Ensure compatibility with your specific model (MT-70 / MT-80 S, MT-80 / MT-90 / MT-90H / MT-100, MT-100, MT-U-GL1).
3. Use the provided tools to securely attach the MT-FPS SF OC Set to your device.
4. Apply a torque of 20 Nm (14.75 ft-lb) for proper installation.


Maintenance


Regularly check the fastenings and connections to ensure they are secure. Re-torque if necessary.


Dimensions


without 1-1


1


A


B

C

D


MT-FPS-SF


MT-FPS-GF



	MT-TFB	MT-TFB	MT-TFB	MT-TLB
width	50 mm 1 15/16"	100 mm 3 15/16"	150 mm 5 7/8"	
	MT-70 / MT-80 S	MT-80 / MT-90 / MT-90H / MT-100	MT-100	MT-U-GL1
MT-FPS-SF	A-D	A-D	A-D*	A
MT-FPS-GF	A	A	A*	A

	MT-FPS-GF OC	
MP-PS 1-1	ok	ok
MP-PS 2-2	ok	ok
MP-PS L4-2	-	ok
MP-PS M4-2	-	ok
MP-PS H4-2	ok	ok

Usage Instructions

2 **A**

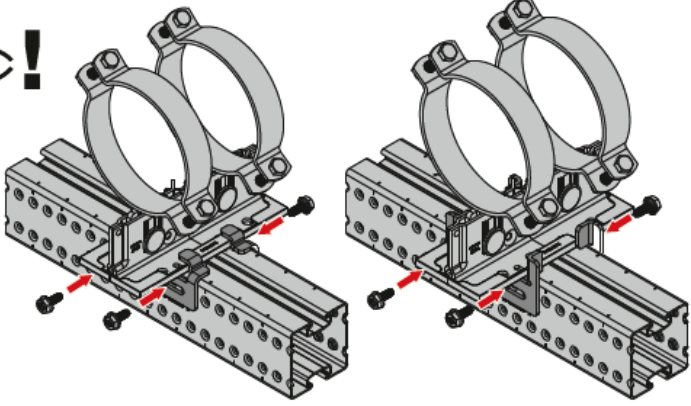


MT



MT-TFB





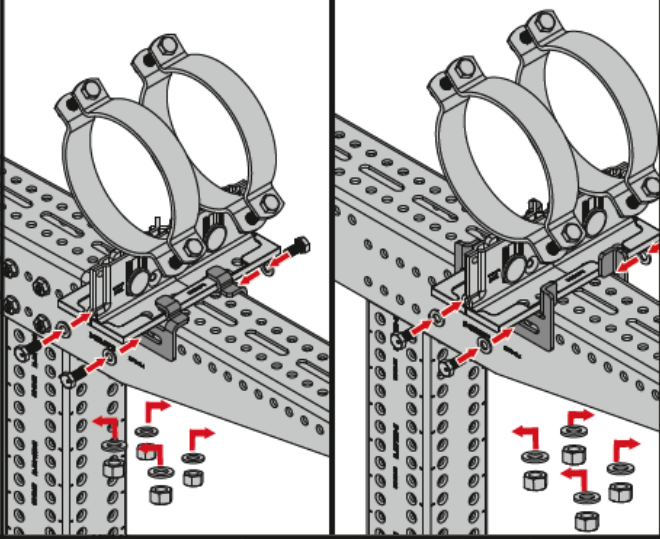
#		MT-FPS-SF / MT-FPS GF
MP-PS x1 - 1x	4	2 pcs
MP-PS x2 - 2x	4	2 pcs
MP-PS x4 - 2x	8	4 pcs

2 **B**



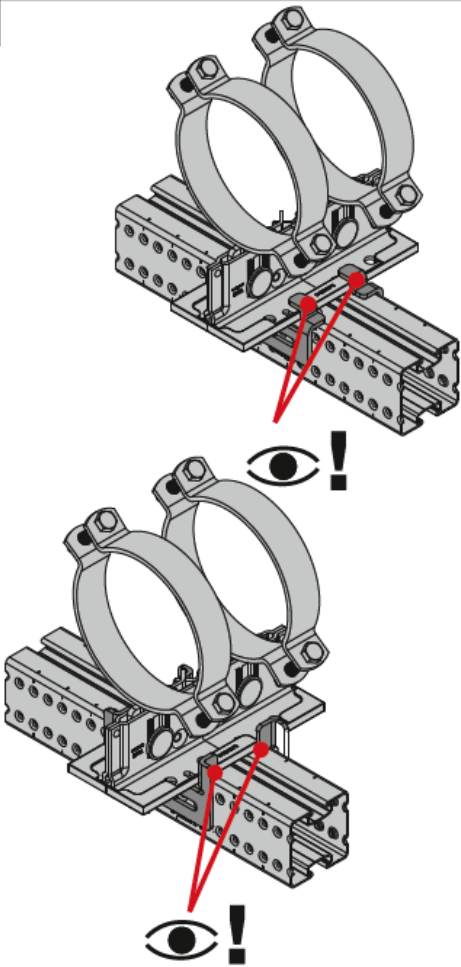
MT-U-GL1

MT-U-GL1	# 	# 
MP-PS x1-1x	4	8
MP-PS x2-2x	4	8
MP-PS x4-2x	-	-

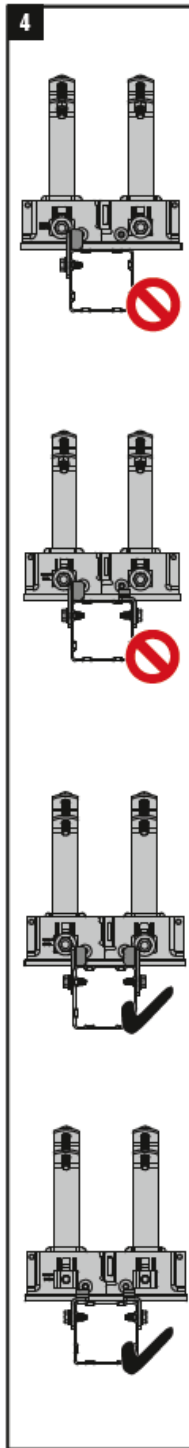


					
MT-U-GL1	MT-TLB OC	M10-SL OC	A 10.5/ 20-F	17	20 Nm (14.75 ft-lb)
	M10x 25-F	M10-F	A 10.5/ 20-F	17	20 Nm (14.75 ft-lb)

3




Precautions



FAQ

- **Q: What is the recommended torque for the MT-FPS SF OC Set?**
 - **A:** The recommended torque for the MT-FPS SF OC Set is 20 Nm (14.75 ft-lb).
- **Q: Which models are compatible with the MT-FPS SF OC Set?**
 - **A:** The MT-FPS SF OC Set is compatible with models MT-70 / MT-80 S, MT-80 / MT-90 / MT-90H / MT-100, and MT-U-GL1.

Documents / Resources



[HILTI MT-FPS Series Fixpoint Connector \[pdf\]](#) Instruction Manual
2334620-02.2025, MT-70, MT-80 S, MT-80, MT-90, MT-90H, MT-100, MT-FPS Series Fixpoint Connector, MT-FPS Series, Fixpoint Connector, Connector

References

- [User Manual](#)

■ HILTI

🔍 2334620-02.2025, Connector, Fixpoint Connector, HILTI, MT-100, MT-70, MT-80, MT-80 S, MT-90, MT-90H, MT-FPS Series, MT-FPS Series Fixpoint Connector

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.