



HINKLEY 27104 1 Light Table Lamp Instruction Manual

[Home](#) » [HINKLEY](#) » HINKLEY 27104 1 Light Table Lamp Instruction Manual 

Contents

- [1 HINKLEY 27104 1 Light Table Lamp](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 DESCRIPTION](#)
- [5 Grounding instructions](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

HINKLEY

HINKLEY 27104 1 Light Table Lamp



Product Information

- **Product Name:** Fixture
- **Item No:** 27104
- **Manufacturer:** Hinkley
- **Manufacturer Address:** 33000 Pin Oak Parkway Avon Lake, OH 44012
- **Contact Information:** 800.446.5539 / 440.653.5500
- **Website:** hinkley.com

Product Usage Instructions

Assembly Instructions

1. Find a clear area in which you can work.
2. Unpack the fixture and glass from the carton.
3. Carefully review the instructions prior to assembly.

Glass Installation Instructions

1. Release the mounting plate (9) from the backplate (14) by removing screw (10).
2. Use screws (6) (not provided) to secure the mounting plate (9) to the junction box (11).
3. Make electrical connections using IS-18 wiring grounding instructions.
4. Replace screw (10) to secure the backplate (14) to the mounting plate (9).

5. Slide glass panels (13) into the cage and secure using tabs (12).
6. Lamp the fixture using an appropriate candle base bulb (7).
7. Secure the roof of the fixture (1) using screw (2) and knob (3).
8. The fixture can now be powered on.

Caulking Instructions

After securing the fixture to the wall, it is recommended to seal the gap between the wall and the fixture backplate on the top and both sides with a good quality waterproof caulk or silicone sealant (NOT INCLUDED) – see Drawing 1. Use a caulking gun and apply a bead of caulk to seal the gap.

Wiring Instructions

Indoor Fixtures:

1. Connect the positive supply wire (A) (typically black or the smooth, unmarked side of the two-conductor cord) to the positive fixture lead (B) with an appropriately sized twist-on connector – see Drawings 1 or 2.
2. Connect the negative supply wire (C) (typically white or the ribbed, marked side of the two-conductor cord) to the negative fixture lead (D).
3. Refer to the grounding instructions below to complete all electrical connections.

Outdoor Fixtures:


1. Connect the positive supply wire (A) (typically black or the smooth, unmarked side of the two-conductor cord) to the positive fixture lead (B) with an appropriately sized twist-on connector – see Drawings 2 or 3.
2. Connect the negative supply wire (C) (typically white or the ribbed, marked side of the two-conductor cord) to the negative fixture lead (D).
3. Refer to the grounding instructions below to complete all electrical connections.

Grounding Instructions


Safety Warning: Read wiring and grounding instructions (IS 18) and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements. Make electrical connections from the supply wire to the fixture lead wires. Refer to instruction sheet (IS 18) and follow all instructions to make all necessary wiring connections. Then refer back to the assembly instructions for the purchased fixture to complete any assembly required.

Assembly Instructions

DRAWING 1-ASSEMBLY

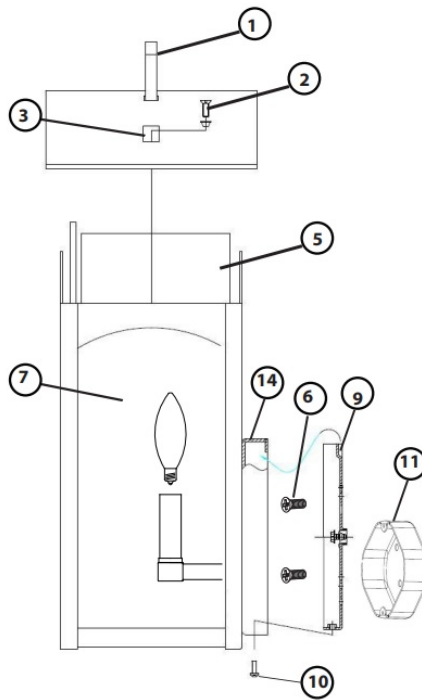

DRAWING 2- Glass Installation

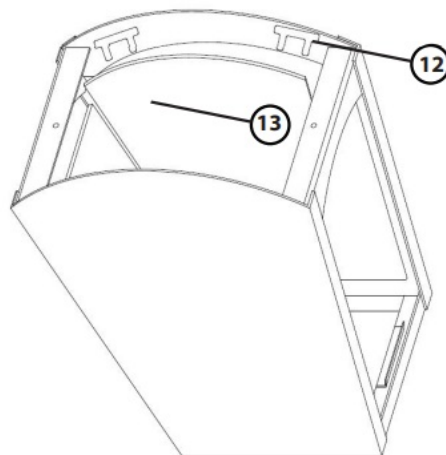

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

DESCRIPTION


1. Release mounting plate (9) from backplate (14) by removing screw (10)
2. Use screws (6) (not provided) to secure mounting plate (9) to junction box (11)
3. Make electrical connections using IS-18 on the next page
4. Replace screw (10) to secure backplate (14) to mounting plate (9)
5. Slide glass panels (13) into cage and secure using tabs (12)
6. Lamp fixture using appropriate candle base bulb (7)
7. Secure roof of fixture (1) using screw (2) and knob (3)
8. Fixture can now be powered on

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.


- Make electrical connections from supply wire to fixture lead wires.
- Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to assembly instructions for the purchased fixture to complete any assembly required.

Caulking Instructions

- After securing fixture to the wall it is recommended that the gap between the wall and the fixture backplate be sealed on the top and both sides, with a good quality waterproof caulk or silicone sealant (NOT INCLUDED) – see Drawing 1.

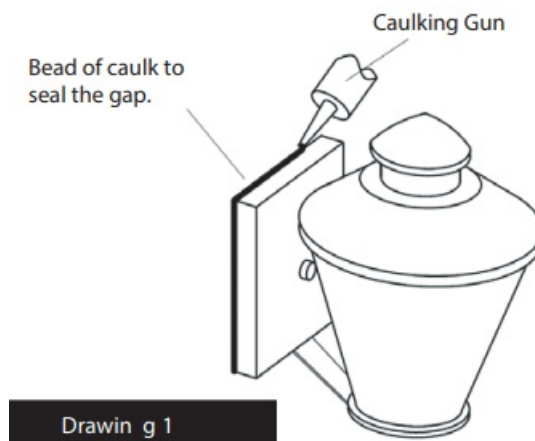

- After securing fixture in place it is recommended that the gap between the mounting top and fixture base be sealed with any good quality waterproof caulk or silicone sealant (not included). It is also recommended that a small bead of caulk or sealant be put under the ball knobs used to mount fixture – see Drawing 2.

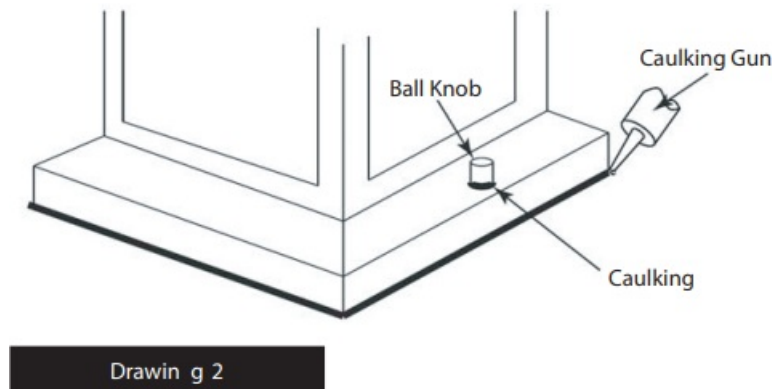

Wiring grounding instructions

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (IS 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS

Wiring instructions

Indoor Fixtures

1. Connect positive supply wire (A) (typically black or the smooth, unmarked side of the two-conductor cord) to

- positive fixture lead (B) with appropriately sized twist on connector – see Drawings 1 or 2.
2. Connect negative supply wire (C) (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead (D).
3. Please refer to the grounding instructions below to complete all electrical connectionsC


Outdoor Fixtures

1. Connect positive supply wire (A) (typically black or the smooth unmarked side of the two-conductor cord) to positive fixture lead (B) with appropriately sized twist on connector — see Drawings 2 or 3.
2. Connect negative supply wire (C) (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead (D).
3. Cover open end of connectors with silicone sealant to form a watertight seal.
 - If installing a wall mount fixture, use caulk to seal gaps between the fixture mounting plate (backplate) and the wall. This will help prevent water from entering the outlet box. If the wall surface is lap siding, use caulk and a fixture mounting platform specially.
4. Please refer to the grounding instructions below to complete all electrical connections.

Grounding instructions

• Flush Mount Fixtures


For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (E) (typically copper or green plastic coated) to the fixture mounting strap (M) with the ground screw (S) – see Drawing 1.

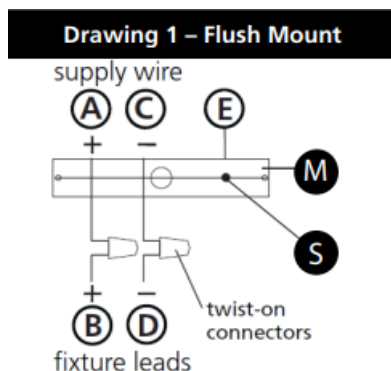

- **Note:** On straps for screw supported fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.


• Chain Hung Fixtures

Loop fixture ground wire (E) (typically copper or green plastic coated) under the head of the ground screw (S) on fixture mounting strap (M) and connect to the loose end of the fixture ground wire directly to the ground wire of the building system with appropriately sized twist-on connectors – see Drawing 2.

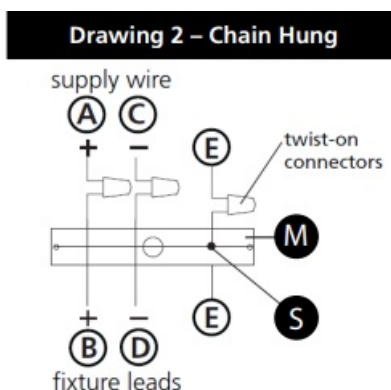


- **Post-Mount Fixtures**

Connect fixture ground wire (E) (typically copper or green plastic coated) to power supply ground with appropriately sized twist-on connector inside post. Cover open end of connector with silicone sealant to form a watertight seal – see Drawing 3.

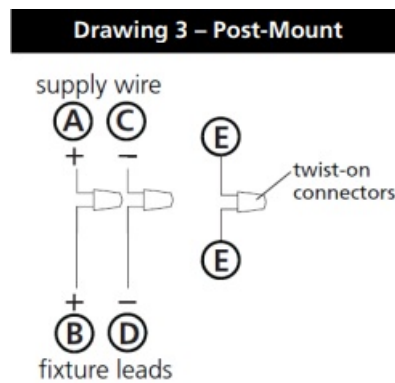

33000 Pin Oak Parkway Avon Lake, OH 44012 800.446.5539 / 440.653.5500 hinkley.com

Documents / Resources

	HINKLEY 27104 1 Light Table Lamp [pdf] Instruction Manual 27104 1 Light Table Lamp, 27104, 1 Light Table Lamp, Light Table Lamp, Table Lamp
---	--

References

- H [HINKLEY - Lighting and Ceiling Fans – Home Page Oct 2023](#)