



[Manuals.plus](#) /

› [KEFEYA](#) /

› KEFEYA S2 PRO MAX 14-inch 2K Portable Monitor User Manual

KEFEYA S2 PRO MAX

KEFEYA S2 PRO MAX 14-inch 2K Portable Monitor User Manual

Model: S2 PRO MAX | Brand: KEFEYA

INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your KEFEYA S2 PRO MAX 14-inch 2K Portable Monitor. Please read this guide thoroughly before using the device to ensure proper functionality and to maximize your experience.

2K QHD 14" Laptop Screen Extender

Ideal for multitasking remote workers, detail-driven creators, and students juggling projects and studies.



2K QHD
2160x1440 P

1500:1
Contrast

180°
IPS

Brightness
Control

16:10
Aspect Ratio

60
60Hz
Frame number

Built-in
Speaker

Built-in
Kickstand

Image: The KEFEYA S2 PRO MAX 14-inch 2K QHD Laptop Screen Extender attached to a laptop, showcasing its dual-screen setup.

PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- 1 x KEFEYA S2 PRO MAX Laptop Screen Extender
- 1 x Type-C to Type-C Cable
- 2 x USB-A to Type-C Cables
- 2 x HDMI to Type-C Cables
- 1 x User Guide
- 1 x User Manual Storage Bag

SETUP INSTRUCTIONS

Follow these steps to properly install and set up your portable monitor:

1. **Secure Attachment:** Position the screen extender on top of your laptop screen. The design is compatible with laptop screens ranging from 13 to 16.5 inches. Ensure it is securely fixed.
2. **Adjust Rear Support:** Open the rear support feet to provide stability.
3. **Angle Adjustment:** Adjust the viewing angle of the screens. The screens can rotate up to 180 degrees for optimal viewing.
4. **Connect and Activate:** Connect the necessary cables to your laptop and the screen extender to activate the displays.

One Screen, Endless Possibilities


Office & Entertainment portable screen: Works with Windows, MacBooks, Switch & smartphones.



Job Data Analysis



Professional Design

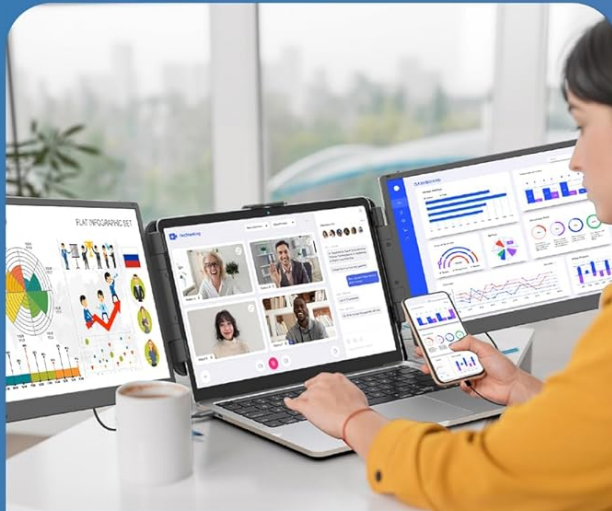

Video Sessions



Entertainment Games

Image: A detailed view highlighting the 180-degree ultra-wide viewing angle and 90-degree adjustable stand of the KEFEYA S2 PRO MAX monitor.

CONNECTION OPTIONS

The KEFEYA S2 PRO MAX offers multiple connection methods depending on your laptop's available ports. Always verify your laptop's port compatibility before connecting.

Option 1: Two Full-Featured Type-C Ports

Screen 1: Connect via 1 x Type-C to Type-C cable.

Screen 2: Connect via 1 x Type-C to Type-C cable.

Option 2: One Full-Featured Type-C Port + One HDMI Port and One USB-A Port (or normal USB-C port)

Screen 1: Connect via 1 x Type-C to Type-C cable.

Screen 2: Connect via 1 x HDMI to Type-C cable **AND** 1 x USB-A to Type-C cable (for power).


Option 3: Two HDMI Ports + Two USB-A Ports (or Two Type-C Ports)

Screen 1: Connect via 1 x HDMI to Type-C cable **AND** 1 x USB-A to Type-C cable (for power).

Screen 2: Connect via 1 x HDMI to Type-C cable **AND** 1 x USB-A to Type-C cable (for power).



Important Note: Macs with M1, M2, or M3 chips require a docking station for compatibility with this screen extender. Always ensure your laptop's ports align with the listed connection types before use.

Easy to Connect



Option 1: Dual Full-featured Type-C Ports



- Screen 1/2 (each): Type-C → Type-C × 1



Type-C to Type-C cable Type-C to Type-C cable

Option 2: Hybrid Ports (Type-C + HDMI + USB-A)



- Screen 1: Type-C → Type-C × 1
- Screen 2: HDMI → Type-C × 1 + USB-A → Type-C × 1



HDMI to Type-C cable Type-C to Type-C cable
USB-A to Type-C cable

Option 3: Dual HDMI & USB-A Ports

- Screen 1/2 (each): HDMI → Type-C × 1 + USB-A → Type-C × 1



HDMI to Type-C cable HDMI to Type-C cable
USB-A to Type-C cable USB-A to Type-C cable

Heads up: MAC with M1/M2/M3 chips cannot use this screen extender.
Always check that your laptop's ports align with our listed connection types before buying.

Image: A visual guide illustrating the different cable connection options for the KEFEYA S2 PRO MAX monitor, including Type-C and HDMI setups.

OPERATING INSTRUCTIONS

Display Modes

The monitor supports multiple display modes to enhance your productivity:

- **Mirror Mode:** Duplicates your primary laptop screen onto the portable monitors.
- **Extended Mode:** Extends your desktop across the portable monitors, providing additional screen real estate for multitasking.
- **Mirror & Extend Mode:** A combination where one external screen mirrors the main display, and the other extends it.
- **Cell Phone Mode:** Allows connection and display from compatible smartphones.



Image: Examples of the KEFEYA S2 PRO MAX monitor operating in Mirror Mode, Extended Mode, and Cell Phone Mode.

Brightness and Volume Control

Utilize the multi-function buttons located on the monitor to adjust brightness levels and speaker volume. Refer to the detailed display image in the Setup section for button locations.

SPECIFICATIONS

Brand	KEFEYA
Model Name	S2 PRO MAX
Screen Size	14.2 Inches
Resolution	2K QHD (2160x1440)
Aspect Ratio	16:10
Contrast Ratio	1500:1
Refresh Rate	60 Hz
Response Time	3 Milliseconds
Brightness	300 nits
Screen Surface	Matte
Connectivity	HDMI, USB Type-C
Compatible Devices	Laptops (Windows, Mac, Chrome), Xbox, Switch, PS5
Item Weight	1.66 Kilograms
Special Features	Secure hook design, multiple display modes, high color accuracy, portable, built-in speaker, built-in kickstand

2K (2160*1440P) Ultra Resolution

Immersive Clarity, True to Life Details



Image: A visual comparison demonstrating the superior clarity of 2K (2160x1440P) Ultra Resolution compared to 1920x1080 and 1680x1050 resolutions.

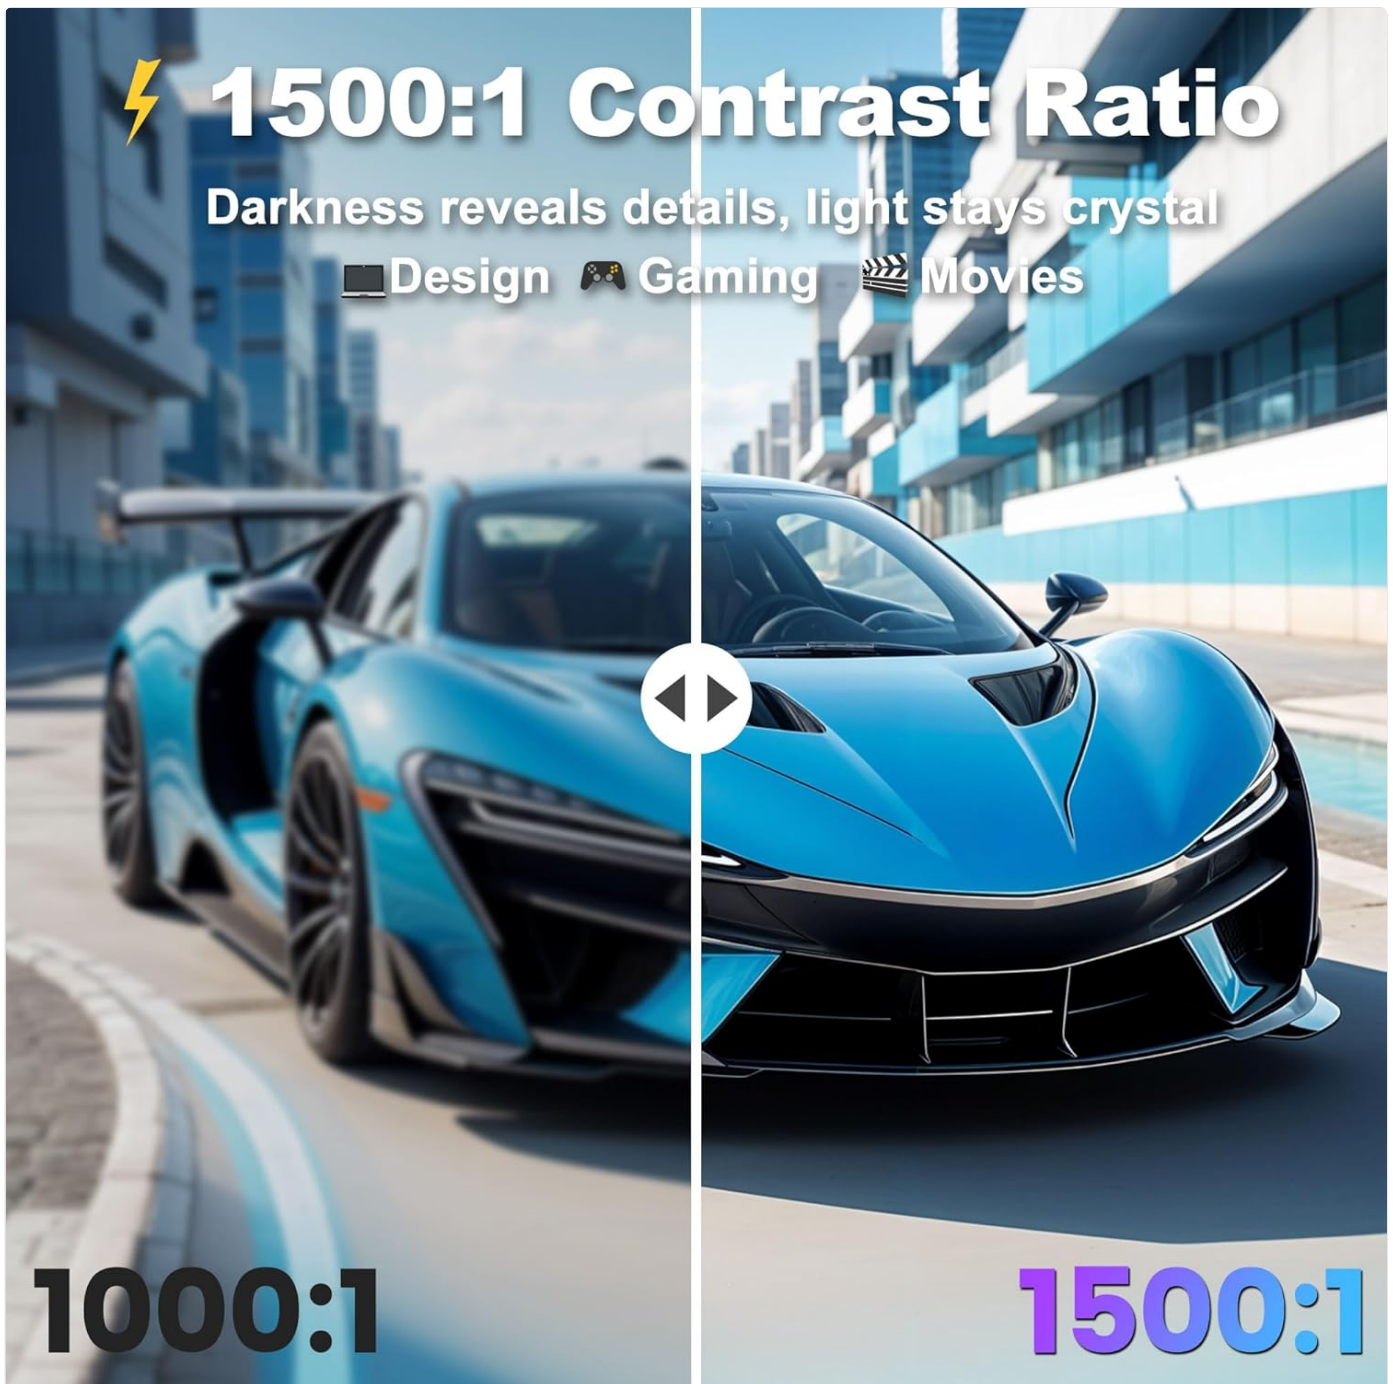


Image: A visual comparison illustrating the enhanced detail and depth provided by a 1500:1 contrast ratio compared to a 1000:1 ratio.

TROUBLESHOOTING

- **"No Signal" Error:**

Ensure all cables are securely connected to both the monitor and your laptop. Verify that your laptop's ports are fully functional and compatible with the connection type (Type-C or HDMI/USB-A combination).

- **Mac Compatibility (M1/M2/M3 Chips):**

This screen extender is not directly compatible with Macs featuring M1, M2, or M3 chips. A separate docking station is required for these models to function correctly.

- **Dual Display Setup Issues:**

Check your operating system's display settings to ensure the monitors are detected and configured correctly for either mirror or extended mode. Update graphics drivers if necessary.

MAINTENANCE

To ensure the longevity and optimal performance of your KEFEYA S2 PRO MAX portable monitor, follow these maintenance

guidelines:

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screen and exterior surfaces. For stubborn marks, slightly dampen the cloth with water or a screen-safe cleaning solution. Avoid harsh chemicals or abrasive materials.
- **Storage:** When not in use, store the monitor in the provided storage bag to protect it from dust and scratches.
- **Handling:** Avoid dropping the device or subjecting it to strong impacts. Do not place heavy objects on top of the monitor.
- **Temperature:** Operate and store the monitor within recommended temperature ranges to prevent damage. Avoid extreme heat or cold.

WARRANTY AND SUPPORT

The KEFEYA S2 PRO MAX portable monitor comes with a **1-year warranty** from the date of purchase. This warranty covers manufacturing defects and ensures product reliability.

For technical assistance, troubleshooting, or warranty claims, please contact KEFEYA customer support. We offer **24/7 support** to address any issues you may encounter.

Please refer to the contact information provided in your user guide or on the official KEFEYA website for support details.