

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Makeid](#) /

› [Makeid L1-C Smart Label Maker Machine User Manual](#)

Makeid L1-C

Makeid L1-C Smart Label Maker Machine User Manual

Model: L1-C | Brand: Makeid

1. PRODUCT OVERVIEW

The Makeid L1-C Smart Label Maker is a compact, portable, and rechargeable device designed for creating custom labels. It connects wirelessly to your iOS or Android device via Bluetooth, allowing you to design and print labels using a dedicated mobile application. The device features thermal printing technology, eliminating the need for ink, and includes a built-in precision cutter for clean label separation. It supports various label tape widths (9mm, 12mm, 16mm) and offers enhanced print quality (203 or 300 DPI) for waterproof and fade-resistant labels.



Figure 1: Overview of the MakeID L1-C Bluetooth Label Maker and its core features including Bluetooth connectivity, ease of use, built-in cutter, no ink needed, rechargeable battery, and clear printing.

2. PACKAGE CONTENTS

Before you begin, please ensure all items are present in your package:

- 1 x MakeID L1-C Label Maker

- 1 x User Manual
- 1 x USB Type-C Cable
- 1 x Roll Label Tape (16mm*4m, pre-installed in the label maker)



Packing List

1*MakelD L1 label maker 1*user manual 1*USB Type-C cable
1*Roll label tape/16mm*4m(inside the label maker)

Figure 2: Detailed view of the MakelD L1-C Label Maker's packing list, showing the label maker, USB-C charging cable, user manual, and a pre-installed roll of 16mm label tape.

3. SETUP GUIDE

3.1 Charging the Device

The Makeid L1-C Label Maker is rechargeable. Use the provided USB Type-C cable to charge the device.

Connect one end of the cable to the label maker's charging port and the other end to a compatible USB power adapter (not included).

3.2 Loading Label Tape

The device comes with one roll of 16mm label tape pre-installed. If you need to replace or install a new roll:

1. Open the label maker's cover by pressing the side button.
2. Load the new label roll into the designated slot.
3. Pull the transparent label lead all the way to the paper exit.
4. Close the cover securely.



Figure 3: Visual guide for correctly installing label tape: load the roll in and pull the transparent label lead to the paper exit.

3.3 App Download and Bluetooth Connection

To operate the label maker, you need to download the MakelD Life app and connect via Bluetooth:

1. Download the "MakelD Life" app from the App Store (iOS) or Google Play (Android).
2. Turn on the label maker by pressing the power button. The indicator light will turn green.
3. Open the MakelD Life app on your smartphone or tablet.
4. Within the app, search for and connect to your L1-C printer via Bluetooth. The app will indicate when the printer is connected.

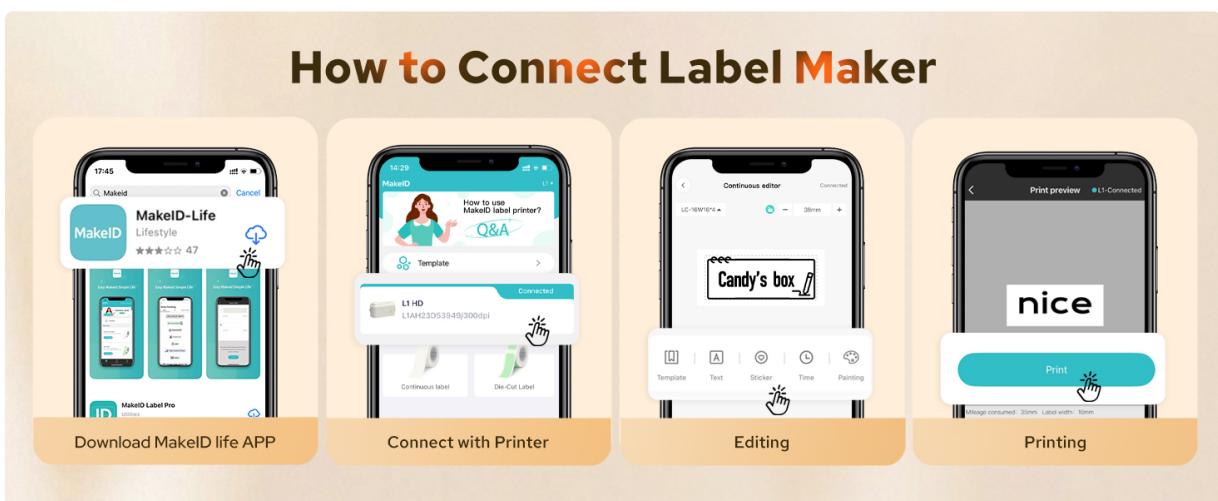


Figure 4: Step-by-step guide on how to connect the MakelD L1-C label maker to your mobile device using the MakelD Life app.

4. OPERATING INSTRUCTIONS

4.1 Creating and Customizing Labels

The MakelD Life app offers extensive customization options:

- **Text Input:** Enter your desired text for the label.
- **Font Selection:** Choose from a variety of fonts available in the app.
- **Icons & Symbols:** Add icons, emojis, and symbols to personalize your labels.
- **Templates:** Utilize pre-designed templates for quick and easy label creation.
- **Layout & Sizing:** Adjust the layout and size of your text and elements to fit the label tape. The device features auto-detection for label size.



Figure 5: The MakelD Life app interface, showcasing various creative templates, options for frames, QR codes, barcodes, stickers, pictures, time, and text input for label design.

No Sizing Hassles – Just Load & Go

Auto-Detect Label Size



Figure 6: The MakID L1-C label maker's auto-detect label size feature, simplifying the printing process by automatically recognizing the label dimensions.

4.2 Printing Labels

Once your label design is complete in the app:

1. Tap the "Print" button in the app.
2. Confirm the print preview and select the number of copies if needed.
3. The label maker will print your custom label.

4.3 Cutting Labels

The L1-C features a built-in precision cutter:

- After printing, wait for the label to emerge from the printer.
- Press the circular button on the top of the device once to cleanly cut the label.
- Peel off the backing from the label and apply it to your desired surface.

Built-in Cutter for Pre-sized & Continuous Labels



Figure 7: The one-touch precision cutter in action, demonstrating how to cleanly trim labels after printing.

5. MAINTENANCE

5.1 Cleaning the Print Head

To ensure optimal print quality, periodically clean the print head:

- Turn off the label maker.
- Open the label compartment.
- Gently wipe the print head with a soft, lint-free cloth dampened with rubbing alcohol.
- Allow it to dry completely before closing the cover and turning the device back on.

5.2 Label Storage

Store label tapes in a cool, dry place away from direct sunlight to maintain their quality and adhesive properties.

6. TROUBLESHOOTING

If you encounter issues with your Makeid L1-C Label Maker, refer to the following common problems and solutions:

- **Device not turning on:** Ensure the device is fully charged.
- **Cannot connect via Bluetooth:** Make sure Bluetooth is enabled on your mobile device and the label maker is within range. Restart both devices and try connecting again.
- **Poor print quality:** Check if the label tape is loaded correctly. Clean the print head as described in the Maintenance section. Ensure the label tape is not old or damaged.
- **Label not cutting cleanly:** Ensure the label tape is properly aligned and the cutter mechanism is free of debris.
- **App not recognizing label size:** Ensure the label tape is correctly installed and the device cover is fully closed.

7. SPECIFICATIONS

Feature	Specification
Brand	Makeid
Model Name	L1-C
Connectivity Technology	Bluetooth
Printing Technology	Thermal
Special Feature	Portable
Printer Output	Monochrome
Product Dimensions	3.84 x 2.18 x 1.57 inches
Item Weight	9.6 ounces
UPC	717121195217

8. WARRANTY AND SUPPORT

8.1 Warranty Information

Warranty details for the Makeid L1-C Smart Label Maker are typically provided with your product packaging or can be found on the official Makeid website. Please retain your proof of purchase for warranty

claims.

8.2 Customer Support

For further assistance, technical support, or inquiries regarding your Makeid L1-C Label Maker, please visit the official Makeid store or contact their customer service:

- **Makeid Store:** [Visit the Makeid Store on Amazon](#)
- Refer to the contact information provided in your product's user manual or on the official Makeid website for direct support channels.