

## Ewent EW3295

# Ewent EW3295 Backlit Wireless Keyboard User Manual

Model: EW3295 | Brand: Ewent

## 1. INTRODUCTION

Thank you for choosing the Ewent EW3295 Backlit Wireless Keyboard. This full-size keyboard offers versatile connectivity options, including Bluetooth 5.0 and 2.4GHz wireless, allowing you to connect up to three devices simultaneously. Its slim design, silent keys, and adjustable backlight provide a comfortable and efficient typing experience. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance of your keyboard.

# Slim and Sturdy Design

low profile and optimal angle ensure maximum precision and comfort for long typing



Figure 1.1: Slim and sturdy design of the EW3295 keyboard.

## 2. KEY FEATURES

- **Wireless Multi-Device Connection:** Connect up to 3 devices simultaneously via Bluetooth 5.0 (x2) or wireless 2.4 GHz. Easily switch between devices with just one button.
- **Adjustable Backlight:** The keyboard's backlight is dimmable and can be turned off completely, ideal for various lighting conditions.
- **Flat & Quiet Design:** Flat, silent keys ensure a comfortable and low-noise typing experience, suitable for quiet environments.
- **12 Multimedia Keys:** Quick access to functions like volume control, email, and other operations.
- **Long-Lasting Rechargeable Battery:** Equipped with a 300mAh lithium battery and intelligent energy-saving function for extended use.
- **Wide Compatibility:** Compatible with Windows (XP, 7, 8.1, 10, 11) and Android, suitable for PCs, laptops, and tablets.

- **Sturdy & Durable Design:** Made of high-density polycarbonate, lightweight yet durable, with a compact design.
- **Italian Layout:** Features an Italian QWERTY keyboard layout.

### 3. PACKAGE CONTENTS

---

Please check the package contents upon unboxing:

- Ewent EW3295 Backlit Wireless Keyboard
- USB-A 2.4GHz Wireless Receiver
- USB-C to USB-A Charging Cable
- User Manual (this document)

### 4. SETUP GUIDE

---

#### 4.1 Charging the Keyboard

The EW3295 keyboard is equipped with a built-in rechargeable 300mAh lithium battery. Before first use, it is recommended to fully charge the keyboard.

1. Locate the USB Type-C charging port on the rear panel of the keyboard.
2. Connect one end of the provided USB-C charging cable to the keyboard's USB-C port.
3. Connect the other end of the USB-A cable to a USB power source (e.g., computer USB port, USB wall adapter).
4. The charging indicator light (if present) will illuminate during charging and turn off when fully charged. A full charge takes less than 1 hour and provides over 1 month of use.

# Rear Panel

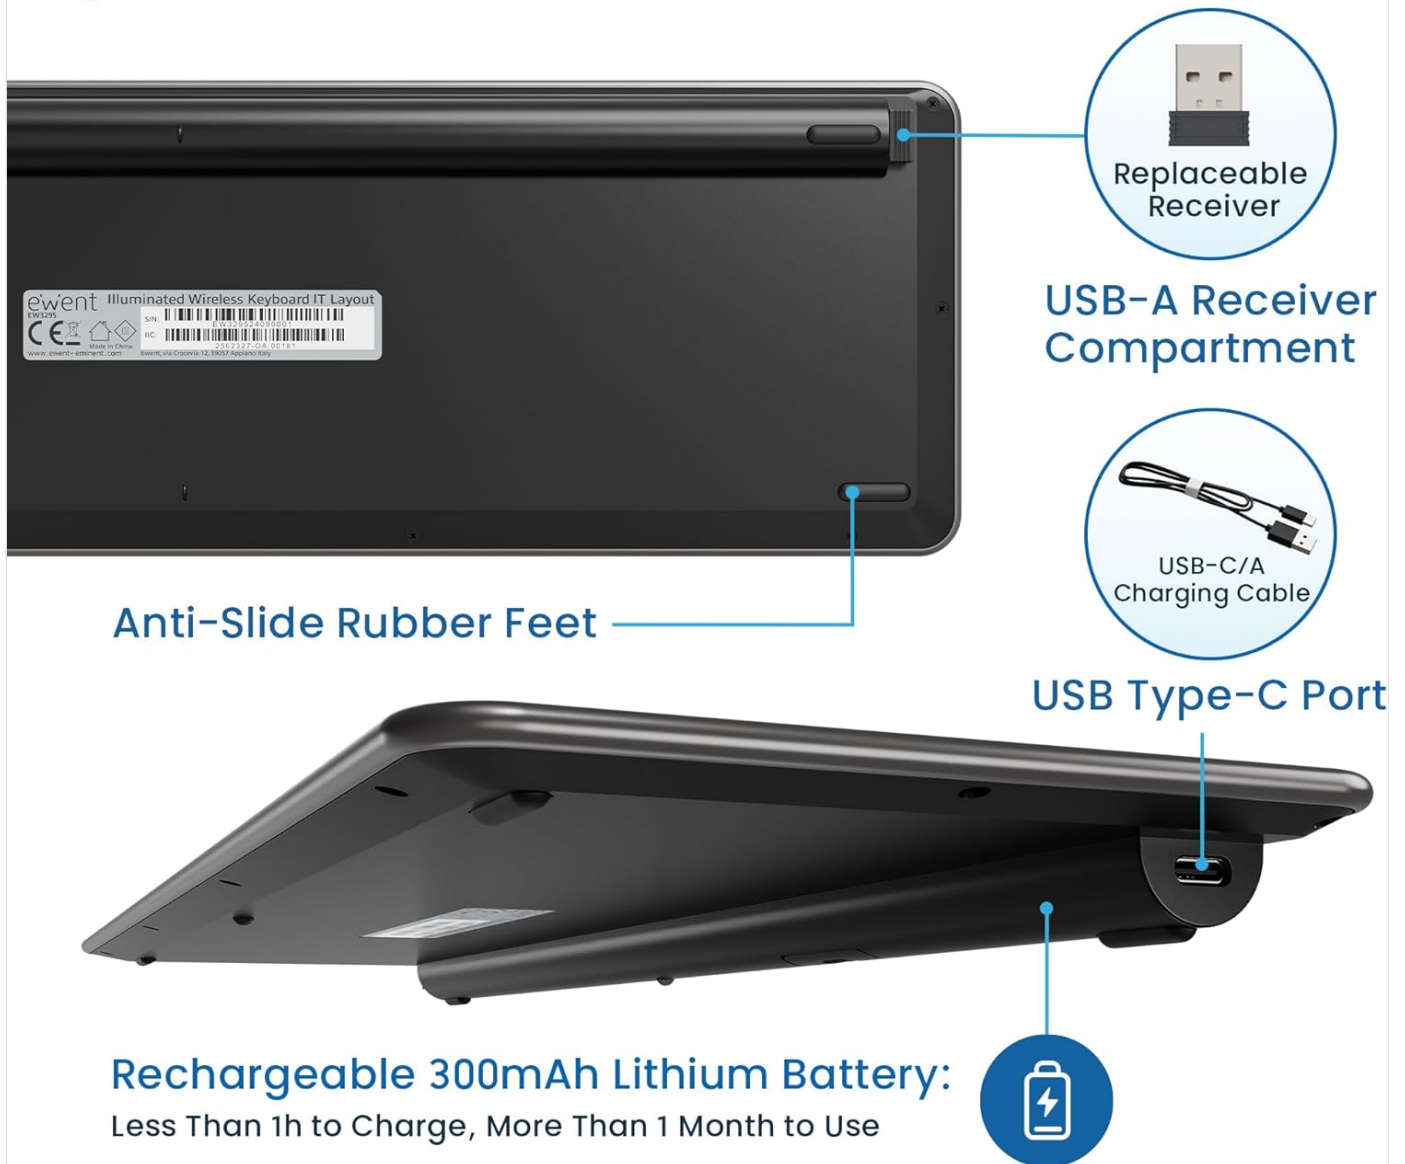


Figure 4.1: Rear panel of the keyboard with charging port and receiver compartment.

## 4.2 Connecting the Keyboard

The EW3295 keyboard supports three connection modes: 2.4GHz wireless and two Bluetooth 5.0 channels (BT1, BT2). You can connect up to three devices and switch between them.

### 4.2.1 2.4GHz Wireless Connection

1. Locate the USB-A wireless receiver, typically stored in a compartment on the rear panel of the keyboard.
2. Plug the USB-A receiver into an available USB port on your computer or device.
3. Press the **Fn + 1** keys on the keyboard to switch to 2.4GHz mode. The indicator light for channel 1 will illuminate.
4. The keyboard should automatically connect to your device.



Figure 4.2: Ewent EW3295 keyboard and its USB wireless receiver.

#### 4.2.2 Bluetooth Connection (BT1 / BT2)

1. Press the **Fn + 2** keys to select Bluetooth channel 1 (BT1) or **Fn + 3** keys to select Bluetooth channel 2 (BT2). The corresponding indicator light will flash, indicating pairing mode.
2. On your device (PC, laptop, tablet), enable Bluetooth and search for new devices.
3. Select "EW3295" or a similar name from the list of available Bluetooth devices.
4. Follow any on-screen prompts to complete the pairing process. Once connected, the indicator light will stop flashing and remain solid.

# Multimode Keyboard

specific key to change the working mode between 2.4GHz and BT1, BT2

- Connects up to 3 devices
- Works across multiple computers seamlessly



Figure 4.3: Multi-device connectivity options for the EW3295 keyboard.

## 4.2.3 Switching Between Connected Devices

Once multiple devices are paired, you can easily switch between them:

- Press **Fn + 1** to switch to the 2.4GHz connected device.
- Press **Fn + 2** to switch to the Bluetooth 1 connected device.
- Press **Fn + 3** to switch to the Bluetooth 2 connected device.

## 5. OPERATING INSTRUCTIONS

### 5.1 Basic Typing

The EW3295 features a full-size Italian QWERTY layout. Its flat and silent keys provide a comfortable and precise typing experience, reducing noise in quiet environments.



# Illuminated QWERTY Keyboard with Italian Layout

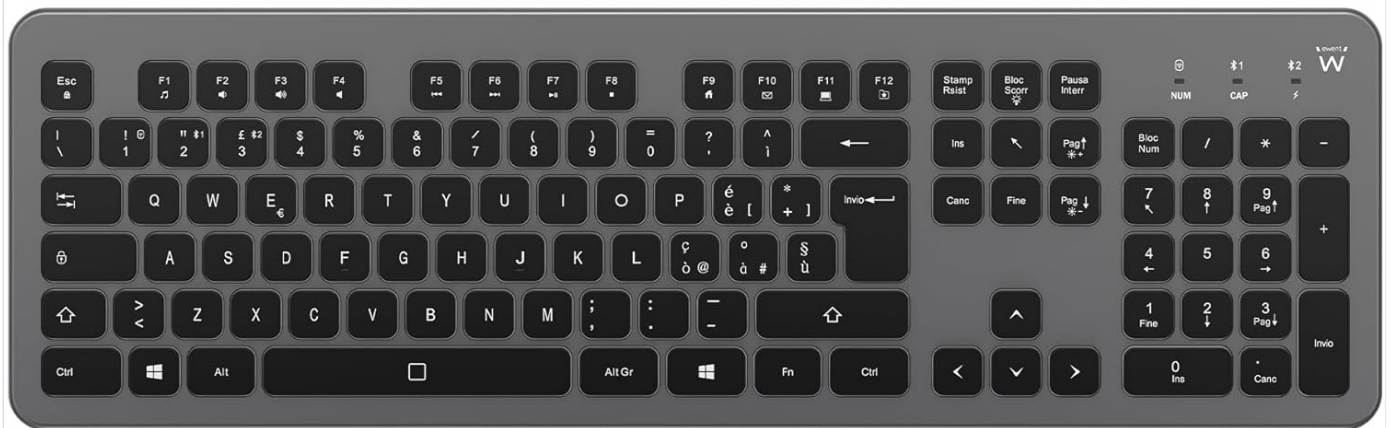


Figure 5.1: Illuminated Italian QWERTY Keyboard Layout.



Figure 5.2: Silent keys for reduced noise.

## 5.2 Backlight Control

The keyboard features an adjustable backlight for improved visibility in low-light conditions.

- **Backlight ON/OFF:** Press the **Bloc Scorr** key (often labeled with a lightbulb icon) to toggle the backlight on or off.
- **Backlight Brightness Up:** Press **Fn + Pag ↑** to increase backlight brightness.
- **Backlight Brightness Down:** Press **Fn + Pag ↓** to decrease backlight brightness.



# Smart Backlight illumination

with adjustable intensity of brightness



## Easy Lighting Control



Backlight ON/OFF



Backlight Up



Backlight Down

Figure 5.3: Backlight control keys.

5.3 Multimedia Keys

The keyboard includes 12 dedicated multimedia keys (F1-F12) that provide quick access to various functions. To use these functions, press the **Fn** key simultaneously with the desired F-key.

Table 5.1: Multimedia Key Functions

Key Combination	Function
Fn + F1	Media Player
Fn + F2	Volume Down
Fn + F3	Volume Up
Fn + F4	Mute

Key Combination	Function
Fn + F5	Previous Track
Fn + F6	Next Track
Fn + F7	Play/Pause
Fn + F8	Stop
Fn + F9	Home Page
Fn + F10	Email
Fn + F11	My Computer
Fn + F12	Calculator

## 6. MAINTENANCE AND CARE

Proper maintenance ensures the longevity and optimal performance of your keyboard.

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the keyboard surface. For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Avoid excessive moisture.
- **Avoid Liquids:** Do not spill liquids on the keyboard. In case of accidental spills, immediately disconnect the keyboard and allow it to dry completely before re-using.
- **Storage:** When not in use for extended periods, store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the keyboard when the low battery indicator appears.
- **Receiver Storage:** When transporting the keyboard, store the USB wireless receiver in its dedicated compartment on the rear panel to prevent loss.

## 7. TROUBLESHOOTING

If you encounter issues with your EW3295 keyboard, please refer to the following common solutions:

**Table 7.1: Troubleshooting Guide**

Problem	Possible Cause	Solution
Keyboard not responding (2.4GHz)	Low battery; Receiver not plugged in; Incorrect channel selected.	Charge the keyboard; Ensure USB receiver is securely plugged in; Press <b>Fn + 1</b> to select 2.4GHz mode.
Keyboard not responding (Bluetooth)	Low battery; Bluetooth not enabled on device; Not paired; Incorrect channel selected.	Charge the keyboard; Enable Bluetooth on your device; Re-pair the keyboard (see Section 4.2.2); Press <b>Fn + 2</b> or <b>Fn + 3</b> to select the correct Bluetooth channel.
Backlight not working	Backlight turned off; Low battery.	Press <b>Bloc Scorr</b> to turn on/off; Increase brightness with <b>Fn + Pag ↑</b> ; Charge the keyboard.

Problem	Possible Cause	Solution
Keys are sticky or unresponsive	Dirt or debris under keys; Physical damage.	Clean the keyboard (see Section 6); If physical damage, contact support.
Short battery life	Frequent backlight use; Battery degradation over time.	Reduce backlight brightness or turn it off when not needed; Ensure full charge cycles.

## 8. SPECIFICATIONS

Table 8.1: Product Specifications

Feature	Detail
Model Name	Tastiera Wireless Retroilluminata EW3295
Item Model Number	EW3295
Brand	Ewent
Connectivity Technology	Bluetooth 5.0 (x2), 2.4GHz Wireless
Keyboard Description	Multimedia, Full-size, Italian Layout
Compatible Devices	PC (Windows XP, 7, 8.1, 10, 11), Android
Battery Type	Rechargeable 300mAh Lithium Battery
Backlight	Adjustable Intensity
Dimensions (L x W x H)	Approx. 432mm x 122mm x 22mm
Weight	Approx. 390g
Material	High-density Polycarbonate

# Dimensions

ultra slim design



432mm



22mm

390g

122mm

Figure 8.1: Keyboard dimensions and weight.

## 9. WARRANTY INFORMATION

Ewent products are designed and manufactured to the highest quality standards. This product is covered by a limited warranty from the date of purchase. Please refer to the warranty card included with your product or visit the official Ewent website for detailed warranty terms and conditions specific to your region. The warranty typically covers defects in materials and workmanship under normal use.

## 10. CUSTOMER SUPPORT

For technical support, troubleshooting assistance, or any questions regarding your Ewent EW3295 keyboard, please contact Ewent customer support. You can typically find contact information (phone, email, support portal) on the official Ewent website or in the product packaging.

Please have your product model number (EW3295) and purchase details ready when contacting support.

Documents - Ewent – EW3295



[pdf]

Ewent Eminent EW3295 Tastiera wireless multi connessione con retroilluminazione da ufficio multimodale 2 4 Hz Bluetooth BT1 5 0 BT2 3 ew3295 melchioni ready media assets files reference |||

**EW3295** Tastiera wireless multi-connesione con retroilluminazione Regolare la luminosità della retroilluminazione o disabilitarla completamente Utilizza fino a 3 dispositivi contemporaneamente Connessione tramite Bluetooth e Wireless 2.4Ghz con ricevitore Tasti silenziosi a basso profilo che ridu...

lang:it score:38 filesize: 1.14 M page\_count: 2 document date: 2025-07-21